



# **Expansion of Hong Kong International Airport into a Three-Runway System**

Construction Phase Monthly EM&A Report No.  
127 (For July 2026)

August 2026

Mott MacDonald  
3/F Manulife Place  
348 Kwun Tong Road  
Kwun Tong  
Kowloon  
Hong Kong

T +852 2828 5757  
mottmac.hk

# **Expansion of Hong Kong International Airport into a Three-Runway System**

Construction Phase Monthly EM&A Report No.  
127 (For July 2026)

August 2026

### **Document reference:**

---

This document is issued for the party which commissioned it and for specific purposes connected with the above-captioned project only. It should not be relied upon by any other party or used for any other purpose.

We accept no responsibility for the consequences of this document being relied upon by any other party, or being used for any other purpose, or containing any error or omission which is due to an error or omission in data supplied to us by other parties.

This document contains confidential information and proprietary intellectual property. It should not be shown to other parties without consent from us and from the party which commissioned it.

---

**This Environmental Monthly EM&A Report No. 127 has been reviewed  
and certified by**

**the Environmental Team Leader (ETL) in accordance with**

**Condition 3.5 of Environmental Permit No. EP-489/2014.**

**Certified by:**

A handwritten signature in black ink, appearing to read 'Terence Kong', is positioned above a horizontal line.

---

Terence Kong  
Environmental Team Leader (ETL)  
Mott MacDonald Hong Kong Limited

**Date**                      **11 August 2026**



Our Ref : 60440482/C/RMKY260812

**By Email**

Airport Authority Hong Kong  
HKIA Tower, 1 Sky Plaza Road  
Hong Kong International Airport  
Lantau, Hong Kong

Attn: Mr. Lawrence Tsui, Principal Manager, Environmental Compliance

12 August 2026

Dear Sir,

**Contract No. 3102**  
**3RS Independent Environmental Checker Consultancy Services**

**Submission of Monthly EM&A Report No. 126 (June 2026)**

Reference is made to the Environmental Team's submission of the Monthly EM&A Report No. 126 under Condition 3.5 of the Environmental Permit No. EP-489/2014 certified by the ET Leader on 11 August 2026.

We would like to inform you that we have no adverse comment and verify the captioned submission in accordance with the requirement stipulated in Condition 3.5 of EP-489/2014.

Should you have any query, please feel free to contact the undersigned at 37290380.

Yours faithfully,  
AECOM Asia Co. Ltd.



Roy Man  
Independent Environmental Checker

# Contents

|                                                                                                   |           |
|---------------------------------------------------------------------------------------------------|-----------|
| Abbreviations                                                                                     | i         |
| Executive summary                                                                                 | 1         |
| <b>1 Introduction</b>                                                                             | <b>4</b>  |
| 1.1 Background                                                                                    | 4         |
| 1.2 Scope of this Report                                                                          | 4         |
| 1.3 Project Organisation                                                                          | 5         |
| 1.4 Summary of Construction Works                                                                 | 8         |
| 1.5 Summary of EM&A Programme Requirements                                                        | 8         |
| <b>2 Air Quality Monitoring</b>                                                                   | <b>13</b> |
| <b>3 Noise Monitoring</b>                                                                         | <b>14</b> |
| <b>4 Water Quality Monitoring</b>                                                                 | <b>15</b> |
| <b>5 Waste Management</b>                                                                         | <b>16</b> |
| 5.1 Action and Limit Levels                                                                       | 16        |
| 5.2 Waste Management Status                                                                       | 16        |
| 5.3 Marine Sediment Management                                                                    | 17        |
| <b>6 Chinese White Dolphin Monitoring</b>                                                         | <b>18</b> |
| 6.1 Site Audit for CWD-related Mitigation Measures                                                | 18        |
| <b>7 Environmental Site Inspection and Audit</b>                                                  | <b>19</b> |
| 7.1 Environmental Site Inspection                                                                 | 19        |
| 7.2 Landscape and Visual Mitigation Measures                                                      | 19        |
| 7.3 Land Contamination Assessment                                                                 | 27        |
| 7.4 Audit of SkyPier High Speed Ferries                                                           | 28        |
| 7.5 Audit of Construction and Associated Vessels                                                  | 29        |
| 7.6 Implementation of Dolphin Exclusion Zone                                                      | 30        |
| 7.7 Status of Submissions under Environmental Permits                                             | 30        |
| 7.8 Compliance with Other Statutory Environmental Requirements                                    | 31        |
| 7.9 Analysis and Interpretation of Complaints, Notification of Summons and Status of Prosecutions | 31        |
| 7.9.1 Complaints                                                                                  | 31        |
| 7.9.2 Notifications of Summons or Status of Prosecution                                           | 31        |
| 7.9.3 Cumulative Statistics                                                                       | 31        |

|          |                                                              |           |
|----------|--------------------------------------------------------------|-----------|
| <b>8</b> | <b>Future Key Issues and Other EIA &amp; EM&amp;A Issues</b> | <b>32</b> |
| 8.1      | Construction Programme for the Coming Reporting Period       | 32        |
| 8.2      | Key Environmental Issues for the Coming Reporting Period     | 33        |
| 8.2.1    | Construction Activities in the Coming Reporting Period       | 33        |
| 8.3      | Review of the Key Assumptions Adopted in the EIA Report      | 33        |
| <b>9</b> | <b>Conclusion and Recommendation</b>                         | <b>34</b> |

## Tables

|                                                                                                                 |    |
|-----------------------------------------------------------------------------------------------------------------|----|
| Table 1.1: Contact Information of Key Personnel                                                                 | 5  |
| Table 1.2: Summary of Status of All Environmental Aspects under the Updated EM&A Manual                         | 9  |
| Table 5.1: Action and Limit Levels for Construction Waste                                                       | 16 |
| Table 5.2: Construction Waste Statistics                                                                        | 16 |
| Table 7.1: Landscape and Visual – Construction Phase Audit Summary                                              | 20 |
| Table 7.2: Examples of Landscape and Visual Mitigation Measures in the Reporting Period                         | 22 |
| Table 7.3: Monitoring Programme for Landscape and Visual                                                        | 22 |
| Table 7.4: Event and Action Plan for Landscape and Visual                                                       | 23 |
| Table 7.5: Summary of the Number of Retained, Transplanted and To-be-transplanted Trees in the Reporting Period | 24 |
| Table 7.6: Summary of the Transplanted Trees Updated in the Reporting Period                                    | 24 |
| Table 7.7: Photos of the Existing Transplanted Tree                                                             | 27 |
| Table 7.8: Summary of Key Audit Findings against the SkyPier Plan                                               | 29 |
| Table 7.9: Status of Submissions under Environmental Permit                                                     | 30 |

## Figures

|            |                                                                       |
|------------|-----------------------------------------------------------------------|
| Figure 1.1 | Locations of Key Construction Activities                              |
| Figure 7.1 | Duration of the SkyPier HSFs travelling through the SCZ for July 2026 |

## Appendices

|            |                                                                                                                    |
|------------|--------------------------------------------------------------------------------------------------------------------|
| Appendix A | Environmental Mitigation Implementation Schedule (EMIS) for Construction Phase                                     |
| Appendix B | Site Inspection Schedule                                                                                           |
| Appendix C | Status of Environmental Permits and Licenses                                                                       |
| Appendix D | Cumulative Statistics on Exceedances, Environmental Complaints, Notification of Summons and Status of Prosecutions |
| Appendix E | Data of SkyPier HSF Movements to/from Macau (between 1 to 31 July 2026)                                            |



# Abbreviations

|                  |                                                                      |
|------------------|----------------------------------------------------------------------|
| 3RS              | Three-Runway System                                                  |
| AAHK             | Airport Authority Hong Kong                                          |
| ABWF             | Architectural, Builder's Work and Finishing                          |
| AECOM            | AECOM Asia Company Limited                                           |
| AFCD             | Agriculture, Fisheries and Conservation Department                   |
| AIS              | Automatic Identification System                                      |
| ANI              | Encounter Rate of Number of Dolphins                                 |
| APM              | Automated People Mover                                               |
| AW               | Airport West                                                         |
| BHS              | Baggage Handling System                                              |
| C&D              | Construction and Demolition                                          |
| CAP              | Contamination Assessment Plan                                        |
| CAR              | Contamination Assessment Report                                      |
| CWD              | Chinese White Dolphin                                                |
| DCM              | Deep Cement Mixing                                                   |
| DEZ              | Dolphin Exclusion Zone                                               |
| DO               | Dissolved Oxygen                                                     |
| DOWL             | Defect and Outstanding Works List                                    |
| EIA              | Environmental Impact Assessment                                      |
| EM&A             | Environmental Monitoring & Audit                                     |
| EP               | Environmental Permit                                                 |
| EPD              | Environmental Protection Department                                  |
| EPSS             | Emergency Power Supply Systems                                       |
| ET               | Environmental Team                                                   |
| E&M              | Electrical & Mechanical                                              |
| FCZ              | Fish Culture Zone                                                    |
| HDD              | Horizontal Directional Drilling                                      |
| HKBCF            | Hong Kong-Zhuhai-Macao Bridge Hong Kong Boundary Crossing Facilities |
| HKIA             | Hong Kong International Airport                                      |
| HOKLAS           | Hong Kong Laboratory Accreditation Scheme                            |
| HSFs             | High Speed Ferries                                                   |
| H <sub>2</sub> S | Hydrogen Sulphide                                                    |
| HVS              | High Volume Sampler                                                  |

|                  |                                                                                 |
|------------------|---------------------------------------------------------------------------------|
| I-2RS            | Interim Two-Runway System                                                       |
| IEC              | Independent Environmental Checker                                               |
| LKC              | Lung Kwu Chau                                                                   |
| MMHK             | Mott MacDonald Hong Kong Limited                                                |
| MMWP             | Marine Mammal Watching Plan                                                     |
| MTRMP-CAV        | Marine Travel Routes and Management Plan for Construction and Associated Vessel |
| NEL              | Northeast Lantau                                                                |
| NLMP             | North Lantau Marine Park                                                        |
| NWL              | Northwest Lantau                                                                |
| PAM              | Passive Acoustic Monitoring                                                     |
| PM               | Project Manager                                                                 |
| SC               | Sha Chau                                                                        |
| SCZ              | Speed Control Zone                                                              |
| SCLKCMP          | Sha Chau and Lung Kwu Chau Marine Park                                          |
| SS               | Suspended Solids                                                                |
| SSSI             | Site of Special Scientific Interest                                             |
| STG              | Encounter Rate of Number of Dolphin Sightings                                   |
| SWL              | Southwest Lantau                                                                |
| T2               | Terminal 2                                                                      |
| The Project      | The Expansion of Hong Kong International Airport into a Three-Runway System     |
| The SkyPier Plan | Marine Travel Routes and Management Plan for High Speed Ferries of SkyPier      |
| The Manual       | The Updated EM&A Manual                                                         |
| TSP              | Total Suspended Particulates                                                    |
| WL               | West Lantau                                                                     |
| WMP              | Waste Management Plan                                                           |

# Executive summary

The “Expansion of Hong Kong International Airport into a Three-Runway System” (the Project) serves to meet the future air traffic demands at Hong Kong International Airport (HKIA). On 7 November 2014, the Environmental Impact Assessment (EIA) Report (Register No.: AEIAR-185/2014) for the Project was approved and an Environmental Permit (EP) (Permit No.: EP-489/2014) was issued for the construction and operation of the Project.

Airport Authority Hong Kong (AAHK) commissioned Mott MacDonald Hong Kong Limited (MMHK) to undertake the role of Environmental Team (ET) for carrying out the Environmental Monitoring & Audit (EM&A) works during the construction phase of the Project in accordance with the Updated EM&A Manual (the Manual).

This is the 127<sup>th</sup> Construction Phase Monthly EM&A Report for the Project which summarises the monitoring results and audit findings of the EM&A programme during the reporting period from 1 to 31 July 2026.

The new North Runway was commissioned in November 2022. Following the completion of reconfiguration works on the Centre Runway, the Three-Runway System (3RS) was commissioned on 28 November 2024. The expanded Terminal 2 (T2) was launched in phases, with the coach hall commencing operation on 23 September 2025, and passenger departures facilities commencing operation on 27 May 2026. In addition, the sewerage upgrading works which comprise the construction of a new gravity sewer with a diameter of at least 1,200 mm adjacent to the existing gravity sewer commenced on 15 June 2026 and the diversion of sewage flow arising from the airport to the Siu Ho Wan Sewage Treatment Works will start within 3 years after the operation of the Project.

## **Key Activities in the Reporting Period**

The key activities of the Project carried out in the reporting period were located in reclamation areas and existing airport island respectively. Works in the reclamation areas included concourse superstructure works, pavement works, tunnel works for Automated People Mover (APM) and Baggage Handling System (BHS) and associated works. Meanwhile, works on the existing airport island involved buildings services and architectural works, modification and tunnel works for APM and BHS, utilities works, road and drainage works.

## **EM&A Activities Conducted in the Reporting Period**

Environmental auditing works, including weekly site inspections, ad-hoc site inspections of construction works conducted by the ET and bi-weekly site inspections conducted by the Independent Environmental Checker (IEC), audits of SkyPier High Speed Ferries (HSFs) and audits of construction and associated vessels were conducted in the reporting period. Based on the information including ET's observations and contractors' site records, it is noted that environmental pollution control and mitigation measures were properly implemented and construction activities of the Project in the reporting period did not introduce adverse impacts to the sensitive receivers.

### **Snapshots of EM&A Activities in the Reporting Period**

|                                                                                   |                                                                                   |                                                                                    |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |  |  |
| On-site Checking of Chemical Waste Storage Cabinet conducted by ET                | On-site Checking of Non-road Mobile Machinery (NRMM) Label conducted by ET        | Dust Suppression Measure conducted by Contractor                                   |

### **Results of Impact Monitoring**

The monitoring works for construction waste and landscape & visual were conducted during the reporting period in accordance with the Updated EM&A Manual.

The monitoring results of construction waste did not trigger the corresponding Action and Limit Levels in the reporting period. No non-conformities were recorded for landscape and visual monitoring in the reporting period.

### **Summary of Upcoming Key Issues**

#### **Reclamation Works:**

##### **Contract 3206 Main Reclamation Works**

- Placement of armour rocks and berm stones, and miscellaneous works at eastern seawall.

#### **Airfield Works:**

##### **Contract 3305 Airfield Ground Lighting System**

- Defects rectification.

##### **Contract 3310 North Runway Modification Works**

- Reinforced concrete works and architectural, builder's work and finishing (ABWF) works; and
- Earthworks, excavation, site clearance and fencing installation at apron.

#### **Terminal 2 Concourse and Apron Works:**

##### **Contract 3408 Third Runway Concourse and Apron Works**

- Building services, ABWF, cable laying, utilities, pavement; and
- Operation of concrete batching plant.

#### **Terminal 2 Expansion:**

##### **Contract 3508 Terminal 2 Expansion Works**

- ABWF, electrical & mechanical (E&M), roof and hard landscape works; and
- Deck, parapet, utilities, road works and abutment construction.

#### **Automated People Mover and Baggage Handling System:**

##### **Contract 3601 New Automated People Mover (APM) System (TRC Line)**

- Guide beam installation and concrete plinth; and
- Installation of power rail, cable containment, cabling and termination, track side equipment and platform screen door.

##### **Contract 3602 Existing APM System Modification Works**

- Guide rail installation.



### **Contract 3603 Baggage Handling System (BHS)**

- CCTV, fire service installation; and
- Conveyor, electrical, mechanical installation and steel work.

### **Airport Support Infrastructure:**

#### **Contract 3802 APM and BHS Tunnels and Related Works**

- Drainage works, backfilling, box culvert, superstructure construction; and
- APM & BHS Tunnel construction and ABWF.

#### **Contract 3805 New Airport District Police Operational Base**

- Architectural, builder's work and finishing and electrical & mechanical works.

### **Construction Support:**

#### **Contract 3901A Concrete Batching Facility**

- Operation of concrete batching plant and material conveyor belt.

#### **Contract 3901B Concrete Batching Facility**

- Demolition works of concrete batching plant.

#### **Contract 3913 Asphalt Batching Plant**

- Operation of asphalt batching plant A.

### **Construction of New Gravity Sewer:**

#### **Contract C24W08 Sewerage Upgrading Works**

- Hoarding works; and
- Excavation and lateral support works.

### **Summary Table**

The following table summarises the key findings of the EM&A programme during the reporting period:

|                                                        | Yes | No | Details                                                                                | Analysis / Recommendation / Remedial Actions |
|--------------------------------------------------------|-----|----|----------------------------------------------------------------------------------------|----------------------------------------------|
| Breach of Limit Level <sup>^</sup>                     |     | √  | No breach of Limit Level was recorded.                                                 | Nil                                          |
| Breach of Action Level <sup>^</sup>                    |     | √  | No breach of Action Level was recorded.                                                | Nil                                          |
| Complaint Received                                     |     | √  | No construction activities related complaint was received during the reporting period. | Nil                                          |
| Notification of any summons and status of prosecutions |     | √  | No notification of summons nor prosecution was received.                               | Nil                                          |
| Change that affect the EM&A                            |     | √  | There was no change to the construction works that may affect the EM&A.                | Nil                                          |

Note:

<sup>^</sup> Only triggering of Action or Limit Level found related to Project works is counted as Breach of Action or Limit Level.

# 1 Introduction

## 1.1 Background

On 7 November 2014, the Environmental Impact Assessment (EIA) Report (Register No.: AEIAR-185/2014) for the “Expansion of Hong Kong International Airport into a Three-Runway System” (the Project) was approved and an Environmental Permit (EP) (Permit No.: EP-489/2014) was issued for the construction and operation of the Project.

Airport Authority Hong Kong (AAHK) commissioned Mott MacDonald Hong Kong Limited (MMHK) to undertake the role of Environmental Team (ET) for carrying out the Environmental Monitoring & Audit (EM&A) works during the construction phase of the Project in accordance with the Updated EM&A Manual (the Manual) submitted under EP Condition 3.1<sup>1</sup>. AECOM Asia Company Limited (AECOM) was employed by AAHK as the Independent Environmental Checker (IEC) for the Project.

The Project covers the expansion of the existing airport into a Three-Runway System (3RS) with key project components comprising land formation of about 650 ha and all associated facilities and infrastructure including taxiways, aprons, aircraft stands, a passenger concourse, an expanded Terminal 2 (T2), all related airside and landside works and associated ancillary and supporting facilities. The submarine aviation fuel pipelines and submarine power cables also require diversion as part of the works.

Construction of the Project is to proceed in the general order of diversion of the submarine aviation fuel pipelines, diversion of the submarine power cables, land formation, and construction of infrastructure, followed by construction of superstructures.

The new North Runway was commissioned in November 2022. Since then, HKIA has continued to operate with two runways, with the Centre Runway temporarily closed for reconfiguration. The reconfiguration works included relevening of the runway pavement to tie in with connecting taxiways, constructing new runway entry and exit taxiways, building new wrap-around taxiways at both ends of the runway. With the completion of the reconfiguration works, the flight check and aircraft crash and rescue exercise were completed on the Centre Runway in September and October 2024 respectively. Thereafter, the 3RS was commissioned on 28 November 2024.

The expanded Terminal 2 (T2) was launched in phases, with the coach hall commencing operation on 23 September 2025, and passenger departures facilities commencing operation on 27 May 2026. In addition, the sewerage upgrading works which comprise the construction of a new gravity sewer with a diameter of at least 1,200 mm adjacent to the existing gravity sewer commenced on 15 June 2026 and the diversion of sewage flow arising from the airport to Siu Ho Wan Sewage Treatment Works will start within 3 years after the operation of the Project.

The summary of construction works programme can be referred to **Section 1.4**.

## 1.2 Scope of this Report

This is the 127<sup>th</sup> Construction Phase Monthly EM&A Report for the Project which summarises the key findings of the EM&A programme during the reporting period from 1 to 31 July 2026.

---

<sup>1</sup> The Manual is available on the Project's dedicated website (accessible at: <http://env.threerunwaysystem.com/en/index.html>).

### 1.3 Project Organisation

The Project's organisation structure presented in Appendix B of the Construction Phase Monthly EM&A Report No.1 remained unchanged during the reporting period. Contact details of the key personnel are presented in **Table 1.1**.

**Table 1.1: Contact Information of Key Personnel**

| Party                                                             | Position                                                    | Name          | Telephone |
|-------------------------------------------------------------------|-------------------------------------------------------------|---------------|-----------|
| Project Manager's Representative<br>(Airport Authority Hong Kong) | Principal Manager, Environmental Compliance, Sustainability | Lawrence Tsui | 2183 2734 |
| Environmental Team (ET)                                           | Environmental Team Leader                                   | Terence Kong  | 2828 5919 |
| (Mott MacDonald Hong Kong Limited)                                | Deputy Environmental Team Leader                            | Ken Wong      | 2828 5817 |
| Independent Environmental Checker (IEC)                           | Independent Environmental Checker                           | Roy Man       | 3729 0380 |
| (AECOM Asia Company Limited)                                      | Deputy Independent Environmental Checker                    | Jackel Law    | 3856 5312 |

#### Reclamation Works:

| Party                                                   | Position              | Name           | Telephone |
|---------------------------------------------------------|-----------------------|----------------|-----------|
| Contract 3206                                           | Project Manager       | Alan Mong      | 3763 1352 |
| Main Reclamation Works<br>(ZHEC-CCCC-CDC Joint Venture) | Environmental Officer | Zhang Bin Wang | 3763 1525 |

#### Airfield Works:

| Party                                                                                                        | Position              | Name          | Telephone |
|--------------------------------------------------------------------------------------------------------------|-----------------------|---------------|-----------|
| Contract 3305                                                                                                | Project Manager       | Allam Al-Turk | 2944 9725 |
| Airfield Ground Lighting System<br>(ADB Safegate Hong Kong Limited)                                          | Environmental Officer | Ivan Ting     | 9222 9490 |
| Contract 3306                                                                                                | Project Director      | Dennis Yam    | 9551 9920 |
| Observation Facility Control System Supporting Interim 2RS and 3RS<br>(Chinney Alliance Engineering Limited) | Environmental Officer | Richard Liu   | 9216 8990 |
| Contract 3308                                                                                                |                       |               |           |
| Foreign Object Debris Detection System<br>(DAS Aviation Services Group)                                      | Project Manager       | Jeffrey Yau   | 9873 7422 |
| Contract 3310                                                                                                | Project Manager       | Terry Chow    | 6031 0887 |

|                                                         |                       |               |           |
|---------------------------------------------------------|-----------------------|---------------|-----------|
| North Runway Modification Works                         |                       |               |           |
| (China State Construction Engineering (Hong Kong) Ltd.) | Environmental Officer | Federick Wong | 9842 2703 |

#### Terminal 2 Concourse and Apron Works:

| Party                                                                                                         | Position              | Name         | Telephone |
|---------------------------------------------------------------------------------------------------------------|-----------------------|--------------|-----------|
| Contract 3404                                                                                                 | Project Manager       | Andy Ng      | 9102 2739 |
| Integrated Airport Control System                                                                             |                       |              |           |
| (Shun Hing Systems Integration Co., Ltd.)                                                                     | Environmental Officer | Michael Lo   | 6228 3926 |
| Contract 3405                                                                                                 | Project Manager       | Francis Choi | 9423 3469 |
| Third Runway Concourse Foundation and Substructure Works                                                      |                       |              |           |
| (China Road and Bridge Corporation – Bachy Soletanche Group Limited – LT Sambo Co., Ltd. Joint Venture)       | Environmental Officer | Jacky Lai    | 9028 8975 |
| Contract 3408                                                                                                 | Senior HSE Manager    | Qian Zhang   | 5377 7976 |
| Third Runway Concourse and Apron Works                                                                        |                       |              |           |
| (Beijing Urban Construction Group Company Limited and Chevalier (Construction) Company Limited Joint Venture) | Environmental Officer | Ivan Mak     | 9422 4805 |

#### Terminal 2 Expansion:

| Party                                               | Position              | Name          | Telephone |
|-----------------------------------------------------|-----------------------|---------------|-----------|
| Contract 3508                                       | Project Director      | Richard Ellis | 6201 5637 |
| Terminal 2 Expansion Works                          |                       |               |           |
| (Gammon Engineering & Construction Company Limited) | Environmental Officer | Carrie Kwan   | 9276 0551 |

#### Automated People Mover and Baggage Handling System:

| Party                                                                                                   | Position              | Name        | Telephone     |
|---------------------------------------------------------------------------------------------------------|-----------------------|-------------|---------------|
| Contract 3601                                                                                           | Project Manager       | Hongdan Wei | 158 6180 9450 |
| New Automated People Mover System (TRC Line)                                                            |                       |             |               |
| (CRRC Puzhen Bombardier Transportation Systems Limited and CRRC Nanjing Puzhen Co., Ltd. Joint Venture) | Environmental Officer | H Y Yue     | 9185 8186     |

| Party                                                                    | Position              | Name       | Telephone |
|--------------------------------------------------------------------------|-----------------------|------------|-----------|
| Contract 3602                                                            | Project Manager       | Xia Bo     | 6586 4950 |
| Existing APM System<br>Modification Works<br>(Niigata Transys Co., Ltd.) | Environmental Officer | Y M Tong   | 5316 9801 |
| Contract 3603                                                            | Project Manager       | K C Ho     | 9272 9626 |
| 3RS Baggage Handling<br>System<br>(VISH Consortium)                      | Environmental Officer | Richard Ng | 9802 9577 |

#### Airport Support Infrastructure:

| Party                                                                                                 | Position              | Name       | Telephone |
|-------------------------------------------------------------------------------------------------------|-----------------------|------------|-----------|
| Contract 3802                                                                                         | Project Director      | John Adams | 6111 6989 |
| APM and BHS Tunnels and<br>Related Works<br>(Gammon Engineering &<br>Construction Company<br>Limited) | Environmental Officer | Yan Ng     | 5345 8555 |
| Contract 3805                                                                                         | Project Manager       | Peter Li   | 9628 0768 |
| New Airport District Police<br>Operational Base<br>(Chinney Construction Co.,<br>Ltd.)                | Environmental Officer | Mike Li    | 6306 8547 |

#### Construction Support:

| Party                                                                                                         | Position                               | Name          | Telephone |
|---------------------------------------------------------------------------------------------------------------|----------------------------------------|---------------|-----------|
| Contract 3721                                                                                                 | Senior Project Manager                 | Thomas Lui    | 9011 5340 |
| Construction Support<br>Infrastructure Works<br>(China State Construction<br>Engineering (Hong Kong)<br>Ltd.) | Environmental Officer                  | John Mak      | 6273 8703 |
| Contract 3728                                                                                                 | Contract Manager                       | C K Liu       | 9194 8739 |
| Minor Site Works<br>(Shun Yuen Construction<br>Company Limited)                                               | Environmental Officer                  | Dan Leung     | 6856 5899 |
| Contract 3733                                                                                                 | Project Manager                        | Michael Kan   | 9206 0550 |
| Emergency Repair Service<br>(Wing Hing Construction Co.,<br>Ltd.)                                             | Safety Health<br>Environmental Manager | Mike Leung    | 6625 2550 |
| Contract 3901A                                                                                                | Project Manager                        | Benedict Wong | 9553 2806 |
| Concrete Batching Facility<br>(K. Wah Concrete Company<br>Limited)                                            | Environmental Officer                  | C P Fung      | 9874 2872 |

| Party                                                       | Position              | Name         | Telephone |
|-------------------------------------------------------------|-----------------------|--------------|-----------|
| Contract 3901B                                              | General Manager       | Gabriel Chan | 2435 3260 |
| Concrete Batching Facility<br>(Gammon Construction Limited) | Environmental Officer | Rex Wong     | 2695 6319 |
| Contract 3913                                               | Project Manager       | Xie Yi Sheng | 6580 6005 |
| Asphalt Batching Plant<br>(SPR Joint Venture)               | Environmental Officer | Kenneth Chan | 9300 2182 |

#### Utilities:

| Party                                                                                         | Position         | Name        | Telephone |
|-----------------------------------------------------------------------------------------------|------------------|-------------|-----------|
| 132 kV Cable<br>(CLP Power Hong Kong Limited / Kum Shing (K.F.) Construction Company Limited) | Engineer         | Ken Fung    | 6391 9087 |
|                                                                                               | Works Supervisor | Bosco Leung | 6370 0780 |

#### Construction of New Gravity Sewer:

| Party                                                           | Position              | Name             | Telephone |
|-----------------------------------------------------------------|-----------------------|------------------|-----------|
| Contract C24W08                                                 | Project Manager       | Hiroshi Fujimoto | 9165 4070 |
| Sewerage Upgrading Works<br>(Penta-Ocean Construction Co. Ltd.) | Environmental Officer | Iris Ho          | 6469 3189 |

## 1.4 Summary of Construction Works

The key activities of the Project carried out in the reporting period were located in reclamation areas and existing airport island, respectively. Works in the reclamation areas included concourse superstructure works, pavement works, tunnel works for APM and BHS and associated works. Meanwhile, works on existing airport island involved buildings services and architectural works, modification and tunnel works for APM and BHS, utilities works, road and drainage works.

The locations of key construction activities are presented in **Figure 1.1**.

## 1.5 Summary of EM&A Programme Requirements

The status for all environmental aspects is presented in **Table 1.2**. The EM&A requirements remained unchanged during the reporting period.

**Table 1.2: Summary of Status of All Environmental Aspects under the Updated EM&A Manual**

| Parameters                                                                                     | EM&A Requirements                                                                                                                    | Status                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Air Quality</b>                                                                             |                                                                                                                                      |                                                                                                                                                                                |
| Baseline Monitoring                                                                            | At least 14 consecutive days before commencement of construction work                                                                | The baseline air quality monitoring result was reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4.                                             |
| Impact Monitoring                                                                              | At least 3 times every 6 days                                                                                                        | The impact air quality monitoring was terminated after 30 June 2026.                                                                                                           |
| <b>Noise</b>                                                                                   |                                                                                                                                      |                                                                                                                                                                                |
| Baseline Monitoring                                                                            | Daily for a period of at least two weeks prior to the commencement of construction works                                             | The baseline noise monitoring result was reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4.                                                   |
| Impact Monitoring                                                                              | Weekly                                                                                                                               | The impact noise monitoring was terminated after 30 June 2026.                                                                                                                 |
| <b>Water Quality</b>                                                                           |                                                                                                                                      |                                                                                                                                                                                |
| General Baseline Water Quality Monitoring for reclamation, water jetting and field joint works | Three days per week, at mid-flood and mid-ebb tides, for at least four weeks prior to the commencement of marine works.              | The baseline water quality monitoring result was reported in Baseline Water Quality Monitoring Report and submitted to EPD under EP Condition 3.4.                             |
| General Baseline Water Quality Monitoring for reclamation, water jetting and field joint works | Three days per week, at mid-flood and mid-ebb tides.                                                                                 | General impact water quality monitoring for water jetting works was completed on 23 May 2017.<br><br>The impact water quality monitoring was terminated after 31 October 2023. |
| Initial Intensive Deep Cement Mixing (DCM) Water Quality Monitoring                            | At least four weeks                                                                                                                  | The Initial Intensive DCM Monitoring Report was submitted and approved by EPD in accordance with the Detailed Plan on DCM.                                                     |
| Regular DCM Water Quality Monitoring                                                           | Three times per week until completion of DCM works.                                                                                  | Due to the completion of all marine-based DCM works within April 2022, regular DCM monitoring was ceased at all monitoring stations starting from 28 April 2022.               |
| Post-construction phase water quality monitoring                                               | Three days per week, at mid-flood and mid-ebb tides for four weeks                                                                   | The four-week post-construction phase water quality monitoring exercise was commenced on 14 November 2023 and completed on 9 December 2023.                                    |
| <b>Sewerage and Sewage Treatment</b>                                                           |                                                                                                                                      |                                                                                                                                                                                |
| Methodology for carrying out annual sewage flow monitoring for concerned gravity sewer         | Methodology to be prepared and submitted to EPD one year before the scheduled commencement of operation of the proposed third runway | The proposed methodology of the annual sewage flow monitoring was approved by EPD. The annual flow monitoring was started from June 2021 and completed in 2022.                |

| Parameters                                                                                                   | EM&A Requirements                                                                                                                                | Status                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Details of the routine Hydrogen Sulphide (H <sub>2</sub> S) monitoring system for the sewerage system of 3RS | Details to be prepared and submitted to EPD at least one year before commencement of the operation of 3RS                                        | Details of the routine H <sub>2</sub> S monitoring system for the sewerage system of 3RS was approved by EPD. The H <sub>2</sub> S monitoring is on-going. |
| <b>Waste Management</b>                                                                                      |                                                                                                                                                  |                                                                                                                                                            |
| Waste Monitoring                                                                                             | At least weekly                                                                                                                                  | On-going                                                                                                                                                   |
| <b>Land Contamination</b>                                                                                    |                                                                                                                                                  |                                                                                                                                                            |
| Supplementary Contamination Assessment Plan (CAP)                                                            | At least 3 months before commencement of any soil remediation works.                                                                             | The Supplementary CAP was submitted and approved by EPD under EP Condition 2.20.                                                                           |
| Site Re-appraisal Summary Report for Fire Training Facility                                                  | Site Re-appraisal Summary Report for Fire Training Facility                                                                                      | Site Re-appraisal Summary Report for Fire Training Facility was submitted and accepted by EPD.                                                             |
| Contamination Assessment Report (CAR) for Golf Course                                                        | CAR to be submitted for golf course                                                                                                              | The CAR for Golf Course was submitted and accepted by EPD.                                                                                                 |
| Contamination Assessment Reports (CAR) for Terminal 2 Emergency Power Supply Systems                         | CAR to be submitted for Terminal 2 Emergency Power Supply Systems                                                                                | The CARs for Terminal 2 Emergency Power Supply Systems were submitted and accepted by EPD.                                                                 |
| <b>Terrestrial Ecology</b>                                                                                   |                                                                                                                                                  |                                                                                                                                                            |
| Pre-construction Egret Survey Plan                                                                           | Once per month in the breeding season between April and July, prior to the commencement of Horizontal Directional Drilling (HDD) drilling works. | The Egret Survey Plan was submitted and approved by EPD under EP Condition 2.14.                                                                           |
| Ecological Monitoring                                                                                        | Monthly monitoring during the HDD construction works period from August to March.                                                                | The terrestrial ecological monitoring at Sheung Sha Chau was completed in January 2019.                                                                    |
| <b>Marine Ecology</b>                                                                                        |                                                                                                                                                  |                                                                                                                                                            |
| Pre-Construction Phase Coral Dive Survey                                                                     | Prior to marine construction works                                                                                                               | The Coral Translocation Plan was submitted and approved by EPD under EP Condition 2.12.                                                                    |
| Coral Translocation                                                                                          | -                                                                                                                                                | The coral translocation was completed.                                                                                                                     |
| Post-Translocation Coral Monitoring                                                                          | As per an enhanced monitoring programme based on the Coral Translocation Plan                                                                    | The post-translocation monitoring programme according to the Coral Translocation Plan was completed in April 2018.                                         |



| Parameters                          | EM&A Requirements                                                                                                                                                                                                                                                                                                                                                                                                  | Status                                                                                                                                                                                                 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Chinese White Dolphins (CWD)</b> |                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                        |
| Baseline Monitoring                 | <p>6 months of baseline surveys before the commencement of land formation related construction works.</p> <p>Vessel line transect surveys: Two full surveys per month;</p> <p>Land-based theodolite tracking surveys: Two days per month at the Sha Chau station and two days per month at the Lung Kwu Chau station; and</p> <p>Passive Acoustic Monitoring (PAM): For the whole duration of baseline period.</p> | Baseline CWD results were reported in the CWD Baseline Monitoring Report and submitted to EPD in accordance with EP Condition 3.4.                                                                     |
| Impact Monitoring                   | <p>Vessel line transect surveys: Two full surveys per month;</p> <p>Land-based theodolite tracking surveys: One day per month at the Sha Chau station and one day per month at the Lung Kwu Chau station; and</p> <p>PAM: For the whole duration for land formation related construction works.</p>                                                                                                                | The construction phase CWD monitoring was completed in December 2023.                                                                                                                                  |
| Post-construction Phase Monitoring  | <p>12 months of post-construction phase CWD monitoring upon the completion of marine construction works.</p> <p>Vessel line transect surveys: Two full surveys per month.</p>                                                                                                                                                                                                                                      | The post-construction phase CWD monitoring was completed in December 2024.                                                                                                                             |
| Operation Phase Monitoring          | <p>12 months of operation phase CWD monitoring upon full implementation of North Lantau Marine Park.</p> <p>Vessel line transect surveys: Two full surveys per month.</p>                                                                                                                                                                                                                                          | The operation phase CWD monitoring was completed in December 2025.                                                                                                                                     |
| Operation Phase Audit               | <p>SkyPier High Speed Ferries (HSFs) implementation measures: Once every three months for a period of one year upon operation of 3RS.</p> <p>Spill Response Plan implementation measures: Once every six months for a period of one year upon operation of 3RS.</p>                                                                                                                                                | <p>All quarterly audits for the one-year implementation period were completed in November 2025.</p> <p>The two six-monthly audits for the one-year implementation were completed in November 2025.</p> |
| <b>Landscape &amp; Visual</b>       |                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                        |
| Landscape & Visual Plan             | At least 3 months before the commencement of construction works on the formed land of the Project.                                                                                                                                                                                                                                                                                                                 | The Landscape & Visual Plan was submitted and approved by EPD under EP Condition 2.18.                                                                                                                 |
| Baseline Monitoring                 | One-off survey within the Project site boundary prior to commencement of any construction works.                                                                                                                                                                                                                                                                                                                   | The baseline landscape & visual monitoring result was reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4.                                                              |
| Impact Monitoring                   | Weekly                                                                                                                                                                                                                                                                                                                                                                                                             | On-going                                                                                                                                                                                               |

| Parameters                                                  | EM&A Requirements  | Status                                                                                         |
|-------------------------------------------------------------|--------------------|------------------------------------------------------------------------------------------------|
| Establishment Works Monitoring                              | Bi-monthly         | On-going                                                                                       |
| Long Term Management (10 years) Monitoring                  | Annually           | On-going                                                                                       |
| <b>Environmental Auditing</b>                               |                    |                                                                                                |
| Regular site inspection                                     | Weekly             | On-going                                                                                       |
| Marine Mammal Watching Plan (MMWP) implementation measures  | Monitor and check  | No MMWP implementation measures were conducted during the reporting period.                    |
| Dolphin Exclusion Zone (DEZ) Plan implementation measures   | Monitor and check  | No DEZ implementation measures were conducted during the reporting period.                     |
| SkyPier High Speed Ferries (HSFs) implementation measures   | Monitor and check  | On-going                                                                                       |
| Construction and Associated Vessels Implementation measures | Monitor and check  | On-going                                                                                       |
| Silt Curtain Deployment Plan implementation measures        | Monitor and check  | All monitoring required under the Silt Curtain Deployment Plan was completed on 17 March 2025. |
| Spill Response Plan implementation measures                 | Monitor and check  | On-going                                                                                       |
| Complaint Hotline and Email channel                         | Construction phase | On-going                                                                                       |
| Environmental Log Book                                      | Construction phase | On-going                                                                                       |

Taking into account the construction works in this reporting period, impact monitoring of waste management and landscape and visual were carried out in the reporting period.

The EM&A programme also involved weekly site inspections and related auditing conducted by the ET for checking the implementation of the required environmental mitigation measures recommended in the approved EIA Report. To promote the environmental awareness and enhance the environmental performance of the contractors, regular environmental management meetings were conducted during the reporting period, which are summarised as below:

- Twelve environmental management meetings for EM&A review with works contracts: 9, 15, 24 and 29 July 2026.

The EM&A programme has been following the recommendations presented in the approved EIA Report and the Manual. A summary of implementation status of the environmental mitigation measures for the construction phase of the Project during the reporting period is provided in **Appendix A**.

## 2 Air Quality Monitoring

Following the commissioning of the Terminal 2 Expansion (T2E) on 27 May 2026, the extent of the remaining construction activities at the site were substantially reduced. A proposal to terminate the construction phase air quality monitoring programme was submitted to EPD and approval was subsequently obtained. The construction phase air quality monitoring programme was terminated with effect from 30 June 2026. All the construction phase air quality monitoring results will be presented in the Final EM&A report.

### 3 Noise Monitoring

Following the commissioning of the T2E on 27 May 2026, the extent of the remaining construction activities at the site were substantially reduced. A proposal to terminate the construction phase noise monitoring programme was submitted to EPD and approval was subsequently obtained. The construction phase noise monitoring programme was terminated with effect from 30 June 2026. All the construction phase noise monitoring results will be presented in the Final EM&A report.

## 4 Water Quality Monitoring

All water impact monitoring work has been completed, with results presented in the Annual EM&A Report for 2023 and to be included in the Final EM&A Report. Based on the analysis presented in Annual EM&A Report for 2023, the post-construction phase water quality monitoring did not reveal significant changes of the water quality when comparing with baseline water quality monitoring, and it can be concluded that the marine works of the Project during construction phase did not cause deterioration in or adverse impacts on the marine water quality surrounding the Project site.

## 5 Waste Management

In accordance with the Manual, the waste generated from construction activities was audited once per week to determine if wastes are being managed in accordance with the Waste Management Plan (WMP) prepared for the Project, contract-specific WMP, and any statutory and contractual requirements. All aspects of waste management including waste generation, storage, transportation and disposal were assessed during the audits.

### 5.1 Action and Limit Levels

The Action and Limit Levels of the construction waste are provided in **Table 5.1**.

**Table 5.1: Action and Limit Levels for Construction Waste**

| Monitoring Stations | Action Level                                    | Limit Level                                                                                   |
|---------------------|-------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Construction Area   | When one valid documented complaint is received | Non-compliance of the WMP, contract-specific WMPs, any statutory and contractual requirements |

### 5.2 Waste Management Status

Weekly monitoring on all works contracts was carried out by the ET to check and monitor the implementation of proper waste management practices during the construction phase.

Recommendations made included provision and maintenance of proper chemical waste storage area, as well as handling, segregation, and regular disposal of general refuse. The contractors have taken actions to implement the recommended measures. Waste management audits were carried out by ET according to the requirement of the Waste Management Plan, Updated EM&A Manual and the implementation schedule of the waste management mitigation measures in **Appendix A**.

Based on updated contractors' information, construction waste generated in the reporting period is summarised in **Table 5.2**. The ET and IEC have carried out site audits regularly and reviewed the trip ticket system. Dedicated areas for sorting of materials are established on site. Recyclable materials such as steel bar, metal strip, aluminium, paper and plastic are sorted on-site and transported off-site for recycling during this reporting period.

**Table 5.2: Construction Waste Statistics**

|                         | C&D Material Stockpiled for Reuse or Recycle <sup>(1)</sup><br>(m <sup>3</sup> ) | C&D Material Reused in the Project<br>(m <sup>3</sup> ) | C&D Material Reused in other Projects<br>(m <sup>3</sup> ) | C&D Material Transferred to Public Fill<br>(m <sup>3</sup> ) | Chemical Waste<br>(kg) | Chemical Waste<br>(l) | General Refuse<br>(tonne) |
|-------------------------|----------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------|--------------------------------------------------------------|------------------------|-----------------------|---------------------------|
| Jun 2026 <sup>(2)</sup> | 193                                                                              | 0                                                       | 0                                                          | 21,420                                                       | 0                      | 0                     | 2,364                     |
| Jul 2026 <sup>(3)</sup> | 0                                                                                | 0                                                       | 2,800                                                      | 194                                                          | 0                      | 3,360                 | 2,137                     |

Notes:

- (1) C&D refers to Construction and Demolition.
- (2) Updated figures were provided by contractors.
- (3) The data was based on the information provided by contractors up to the submission date of this Monthly EM&A Report and might be updated in the forthcoming Monthly EM&A Report.

There were no complaints, non-compliance of the WMP, contract-specific WMPs, statutory and contractual requirements that triggered Action and Limit Levels in the reporting period.

### **5.3 Marine Sediment Management**

Marine sediment is managed according to the EIA Report, Updated EM&A Manual, Waste Management Plan and the proposal of Further Development on Treatment Level / Details and the Reuse Mode for Marine Sediment (hereinafter referred to as “Further Development Proposal”) of the Project. The storage conditions of the treated marine sediment, and final backfilling location records were inspected and checked by ET and verified by IEC to ensure they were in compliance with the requirements as stipulated in the Waste Management Plan and Further Development Proposal.

Backfilling works for treated marine sediment were completed. The details of the marine sediment sampling, treatment and backfilling can be referred to Annual EM&A Report.

## 6 Chinese White Dolphin Monitoring

All Chinese White Dolphin monitoring work required under Section 10.2.3 of the Updated EM&A Manual has been completed. Results of baseline monitoring conducted between December 2015 and July 2016, and the results of the construction phase impact monitoring conducted between August and December 2016, were presented in the Annual EM&A Report No. 1. Annual construction phase impact monitoring results for the period from January 2017 to December 2023 were documented in Annual EM&A Reports No. 2 to No. 8. Post-construction phase monitoring results for January to December 2024 were presented in Annual EM&A Report No. 9. Operation phase monitoring results for January to December 2025 will be reported in the upcoming Annual EM&A Report No. 10. A consolidated summary of all CWD monitoring conducted from December 2015 to December 2025 will be included in the Final EM&A Report.

### 6.1 Site Audit for CWD-related Mitigation Measures

During the reporting period, no DEZ implementation measures were conducted and no training sessions were provided by the ET.

The construction vessel management is presented in **Section 7.5** below.

According to Section 10.6.2.2 of the Updated EM&A Manual, audits of SkyPier HSFs implementation measures and Spill Responses Plan implementation measures were conducted once every three months and every six months respectively, for one year upon operation of 3RS. The one-year audit cycle for both measures was completed in November 2025 and no specific findings were identified throughout the audit period.



## 7 Environmental Site Inspection and Audit

### 7.1 Environmental Site Inspection

Site inspections of the construction works to audit the implementation of proper environmental pollution control and mitigation measures for the Project were conducted by ET and IEC on a weekly and bi-weekly basis, respectively. The weekly site inspection schedule of the construction works is provided in **Appendix B**. Besides, ad-hoc site inspections were also conducted by ET and IEC if environmental problems were identified, or subsequent to receipt of an environmental complaint, or as part of the investigation work. These site inspections provided a direct means to reinforce the specified environmental protection requirements and pollution control measures in construction sites.

During site inspections, environmental situation, status of implementation of pollution control and mitigation measures were observed. Environmental documents and site records, including waste disposal record, maintenance record of environmental equipment, and relevant environmental permit and licences, were also checked on site. Observations were recorded in the site inspection checklist and passed to the contractor together with the recommended mitigation measures where necessary in order to advise contractors on environmental improvement, awareness and on-site enhancement measures. The observations were made with reference to the following information during the site inspections:

- The EIA and EM&A requirements;
- Relevant environmental protection laws, guidelines, and practice notes;
- The EP conditions and other submissions under the EP;
- Monitoring results of EM&A programme;
- Works progress and programme;
- Proposal of individual works;
- Contract specifications on environmental protection; and
- Previous site inspection results.

Good site practices were observed in site inspections during the reporting period. Advice was given when necessary to ensure the construction workforce were familiar with relevant procedures, and to maintain good environmental performance on site. Regular toolbox talks on environmental issues were organised for the construction workforce by the contractors to ensure understanding and proper implementation of environmental protection and pollution control mitigation measures.

A summary of implementation status of the environmental mitigation measures for the construction phase of the Project during the reporting period is provided in **Appendix A**.

### 7.2 Landscape and Visual Mitigation Measures

Implementation of applicable landscape and visual mitigation measures (reference to the environmental protection measures CM1 – CM10 and OM7 in **Appendix A**) was monitored in accordance with the Manual. All measures undertaken by both the contractor and the landscape contractor during the construction phase and first year of the operation phase shall be audited by a landscape architect, as a member of the ET, on a regular basis to ensure compliance with the intended aims of the measures. Site inspections shall be undertaken at least once every two months during the first year of the operation phase.

The implementation status of the environmental protection measures is summarized below in **Table 7.1**. Examples of landscape and visual mitigation measures are shown in **Table 7.2**. The monitoring programme for detailed design, construction, establishment works and long-term management (10 years) stages is presented in **Table 7.3**. The Event and Action Plan for Landscape and Visual impacts is stated in **Table 7.4**.

**Table 7.1: Landscape and Visual – Construction Phase Audit Summary**

| Landscape and Visual Mitigation Measures during Construction                                                                                                                                                                                                                                                                                                                                                                      | Implementation Status                                                                                                                                                                                                                                                                                                                             | Relevant Contract(s) in the Reporting Period |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| CM1 – The construction area and contractor's temporary works areas shall be minimised to avoid impacts on adjacent landscape.                                                                                                                                                                                                                                                                                                     | The implementation of mitigation measures was checked by ET during weekly site inspection and reported by the Contractors during the monthly Environmental Management Meetings. Implementation of the measures CM5, CM6 and CM7 by Contractors was observed.                                                                                      | All works contracts                          |
| CM2 – Reduction of construction period to practical minimum                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                   |                                              |
| CM3 – Phasing of the construction stage to reduce visual impacts during the construction phase.                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                   |                                              |
| CM4 – Construction traffic (land and sea) including construction plants, construction vessels and barges shall be kept to a practical minimum.                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                   |                                              |
| CM5 – Erection of decorative mesh screens or construction hoardings around works areas in visually unobtrusive colours.                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                   |                                              |
| CM6 – Avoidance of excessive height and bulk of site buildings and structures                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                   |                                              |
| CM7 – Control of night-time lighting by hooding all lights and through minimisation of night working periods                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                   |                                              |
| CM8 – All existing trees shall be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas | <p>Tree Protection Specifications were provided in the relevant Contract Specifications respectively for implementation by the Contractors under the Project.</p> <p>The Contractors' performance on the implementation of the tree maintenance and protection measures was observed and checked by the ET weekly during construction period.</p> | -                                            |

| Landscape and Visual Mitigation Measures during Construction                                                                                                                                                                                                                                                                                     | Implementation Status                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Relevant Contract(s) in the Reporting Period |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| CM9 – Trees unavoidably affected by the works shall be transplanted where practical. A detailed Tree Transplanting Specification shall be provided in the Contract Specification, if applicable. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme                                 | <p>Tree Transplanting Specifications were provided in the relevant Contract Specifications respectively for implementation by the Contractors under the Project where trees would unavoidably be affected by the construction works.</p> <p>The Contractors were required to submit Method Statements for tree transplanting prior to the transplanting works. Tree inspections were conducted by ET to check the tree transplanting works implemented by the Contractors on site.</p> <p>The Contractors' performance on the implementation of trees maintenance and protection measures on transplanted trees was observed and checked by the ET bi-monthly during the 12-month establishment period after the completion of each batch of transplanting works.</p> <p>Long term management of the transplanted trees was currently monitored by ET annually.</p> | AAHK                                         |
| CM10 – Land formation works shall be followed with advanced hydroseeding around taxiways and runways as soon as practical                                                                                                                                                                                                                        | The implementation of advanced hydroseeding works by the Contractors were completed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -                                            |
| OM7 – Compensatory tree planting for all felled trees shall be provided to the satisfaction of relevant Government departments. Required numbers and locations of compensatory trees shall be determined and agreed separately with Government during the Tree Felling Application process under the relevant technical circulars <sup>(1)</sup> | <p>Compensatory trees have been planted in batches at different time periods.</p> <p>The compensatory trees were checked by ET bi-monthly during the 12-month establishment period after the completion of each batch of compensatory tree planting works.</p> <p>Subsequently, the trees were monitored annually throughout the 10-year long-term management period, succeeding the establishment period for each batch of compensatory planting.</p>                                                                                                                                                                                                                                                                                                                                                                                                              | AAHK                                         |

Note:

(1) AAHK is the management and maintenance agency of the compensatory trees. Tree Felling Application is not required for 3RS project.

**Table 7.2: Examples of Landscape and Visual Mitigation Measures in the Reporting Period**

|                                                                                    |                                                                                    |                                                                                                   |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
|   |   |                 |
| Erection of site hoardings around works area in unobtrusive colours (CM5)          | Avoidance of excessive height and bulk of site buildings (CM6)                     | Control of night-time lighting using light hooding and minimisation of night working period (CM7) |
|  |  |                                                                                                   |
| General view of transplanted trees (CM9)                                           | General view of compensatory tree planting (OM7)                                   |                                                                                                   |

In accordance with the Updated EM&A Manual, all existing trees shall be protected carefully during construction. Trees that unavoidably affected by the works shall be transplanted where practical. In this reporting period, the total number of retained trees and transplanted trees under the Project remained unchanged (i.e. 0 and 26 respectively) comparing to the previous reporting period. No non-conformities were recorded during the reporting period.

Details of the retained trees, transplanted trees and to-be-transplanted trees under the Project are summarized in **Table 7.5**. Details of the retained trees are to be discussed in the Quarterly EM&A reports.

For the compensatory tree monitoring, bi-monthly site inspection for the 12-month establishment period will be conducted in August 2026.

**Table 7.3: Monitoring Programme for Landscape and Visual**

| Stage           | Monitoring Task                                                                                                                                                                                                                                                                                                                         | Monitoring Report                                                              | Form of Approval   | Frequency                               |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------|-----------------------------------------|
| Detailed Design | Checking of design works against the recommendations of the landscape and visual impact assessments within the EIA shall be undertaken during detailed design and tender stage, to ensure that they fulfil the intention of the mitigation measures. Any changes to the design, including design changes on site shall also be checked. | Report by AAHK / PM confirming that the design conforms to requirements of EP. | Approved by Client | At the end of the Detailed Design Phase |

| Stage                          | Monitoring Task                                                                                                                                                                      | Monitoring Report                                               | Form of Approval                                 | Frequency        |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------|------------------|
| Construction                   | Checking of the contractor's operations during the construction period.                                                                                                              | Report on Contractor's compliance, by ET                        | Counter signature of report by IEC               | Weekly           |
| Establishment Works            | Checking of the planting works during the twelve-month Establishment Period after completion of each batch of transplanting works or compensatory tree planting works.               | Report on Contractor's compliance, by ET                        | Counter signature of report by IEC               | Every two months |
| Long Term Management (10 year) | Monitoring of the long-term management of the planting works in the period up to 10 years after completion of each batch of transplanting works or compensatory tree planting works. | Report on compliance by ET or maintenance Agency as appropriate | Counter signature of report by Management Agency | Annually         |

**Table 7.4: Event and Action Plan for Landscape and Visual**

| Event Action Level             | Action                                                                                                                                                                            |                                                                                                                                                                                                                                        |                                                                          |                                                                                                                             |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
|                                | ET                                                                                                                                                                                | IEC                                                                                                                                                                                                                                    | AAHK / PM                                                                | Contractor                                                                                                                  |
| Design Check                   | Check final design conforms to the requirements of EP and prepare report.                                                                                                         | Check report.<br>Recommend remedial design if necessary.                                                                                                                                                                               | Undertake remedial design if necessary.                                  | -                                                                                                                           |
| Non-conformity on one occasion | Identify source.<br>Inform IEC and AAHK / PM.<br>Discuss remedial actions with IEC, AAHK / PM and Contractor.<br>Monitor remedial actions until rectification has been completed. | Check report.<br>Check Contractor's working method.<br>Discuss with ET and Contractor on possible remedial measures.<br>Advise AAHK / PM on effectiveness of proposed remedial measures.<br>Check implementation of remedial measures. | Notify Contractor.<br>Ensure remedial measures are properly implemented. | Amend working methods to prevent recurrence of non-conformity.<br>Rectify damage and undertake additional action necessary. |

| Event Action Level      | Action                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                       |                                                                          |                                                                                                                             |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
|                         | ET                                                                                                                                                                                                                                                                           | IEC                                                                                                                                                                                                                                                   | AAHK / PM                                                                | Contractor                                                                                                                  |
| Repeated Non-conformity | Identify source.<br>Inform IEC and AAHK / PM.<br>Increase monitoring frequency.<br>Discuss remedial actions with IEC, AAHK / PM and Contractor.<br>Monitor remedial actions until rectification has been completed.<br>If non-conformity stops, cease additional monitoring. | Check monitoring report.<br>Check Contractor's working method.<br>Discuss with ET and Contractor on possible remedial measures.<br>Advise AAHK / PM on effectiveness of proposed remedial measures.<br>Supervise implementation of remedial measures. | Notify Contractor.<br>Ensure remedial measures are properly implemented. | Amend working methods to prevent recurrence of non-conformity.<br>Rectify damage and undertake additional action necessary. |

**Table 7.5: Summary of the Number of Retained, Transplanted and To-be-transplanted Trees in the Reporting Period**

| Contract No. / Works | Retain (nos.)          | Transplanted (nos.)  |                    | To-be-transplanted (nos.) |
|----------------------|------------------------|----------------------|--------------------|---------------------------|
|                      |                        | Establishment Period | Maintenance Period |                           |
| 3503                 | 0                      | 0                    | 9 <sup>(1)</sup>   | 0                         |
| 3508                 | 0                      | 0                    | 12 <sup>(3)</sup>  | 0                         |
| 3801                 | 0                      | 0                    | 5 <sup>(2)</sup>   | 0                         |
| <b>Grand Total</b>   | <b>0<sup>(4)</sup></b> | <b>0</b>             | <b>26</b>          | <b>0</b>                  |

Notes:

- (1) Contract 3503 was completed. The 9 transplanted trees, including T835, T836, T838, T812, T814, T815, T829, T830 and T831 were handed over to AAHK in February 2022.
- (2) Contract 3801 was completed. The 5 transplanted trees including CT276, CT1253, CT1194, CT1794 and CT1795 were handed over to other management agencies. Details of the management agency are presented in **Table 7.6**.
- (3) The 12 transplanted trees, including T1493 to T1504, were handed over to AAHK in May 2026.
- (4) All retained trees have been handed over to AAHK. Therefore, no existing trees remain under 3RS project.

**Table 7.6: Summary of the Transplanted Trees Updated in the Reporting Period**

| Tree ID | Transplant Date | Management Stage                                          | Management Agency                        | Remarks                                                                                                                                                                                                                   |
|---------|-----------------|-----------------------------------------------------------|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CT276   | 3 May 2018      | <u>Long Term Management period</u><br>Jun 2019 – May 2028 | Southern Landside Petrol Filling Station | Establishment Period was completed. Next inspection will be conducted in February 2027. Photos of the last inspection in February 2026 can be referred to Table 7.7 of the Construction Phase Monthly EM&A Report No.122. |
| CT1253  | 4 May 2018      | <u>Long Term Management period</u><br>Jun 2019 – May 2028 | Southern Landside Petrol Filling Station |                                                                                                                                                                                                                           |

| Tree ID | Transplant Date | Management Stage                                          | Management Agency | Remarks                                                                                                                                                                                                                   |
|---------|-----------------|-----------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| T835    | 22 Jan 2020     | <u>Long Term Management period</u><br>Feb 2021 – Jan 2030 | AAHK              | Establishment Period was completed. The trees within the land parcel were acquired for construction of infrastructure. The trees were felled in 2023.                                                                     |
| T836    | 13 Dec 2019     | <u>Long Term Management period</u><br>Feb 2021 – Jan 2030 | AAHK              |                                                                                                                                                                                                                           |
| T838    | 22 Jan 2020     | <u>Long Term Management period</u><br>Feb 2021 – Jan 2030 | AAHK              |                                                                                                                                                                                                                           |
| T812    | 21 Dec 2020     | <u>Long Term Management period</u><br>Jan 2022 – Dec 2031 | AAHK              | Establishment Period was completed. Next inspection will be conducted in December 2026. Photos of the last inspection in December 2025 can be referred to Table 7.7 of the Construction Phase Monthly EM&A Report No.120. |
| T814    | 20 Dec 2020     | <u>Long Term Management period</u><br>Jan 2022 – Dec 2031 | AAHK              |                                                                                                                                                                                                                           |
| T815    | 15 Dec 2020     | <u>Long Term Management period</u><br>Jan 2022 – Dec 2031 | AAHK              |                                                                                                                                                                                                                           |
| T829    | 18 Dec 2020     | <u>Long Term Management period</u><br>Jan 2022 – Dec 2031 | AAHK              |                                                                                                                                                                                                                           |
| T830    | 14 Dec 2020     | <u>Long Term Management period</u><br>Jan 2022 – Dec 2031 | AAHK              |                                                                                                                                                                                                                           |
| T831    | 19 Dec 2020     | <u>Long Term Management period</u><br>Jan 2022 – Dec 2031 | AAHK              | Establishment Period was completed. Next inspection will be conducted in July 2027. Photos of the last inspection in July 2026 were shown in <b>Table 7.7</b> .                                                           |
| T1493   | 6 Jul 2021      | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK              |                                                                                                                                                                                                                           |
| T1494   | 6 Jul 2021      | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK              |                                                                                                                                                                                                                           |
| T1495   | 10 Jul 2021     | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK              |                                                                                                                                                                                                                           |
| T1496   | 5 Jul 2021      | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK              |                                                                                                                                                                                                                           |
| T1497   | 5 Jul 2021      | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK              |                                                                                                                                                                                                                           |

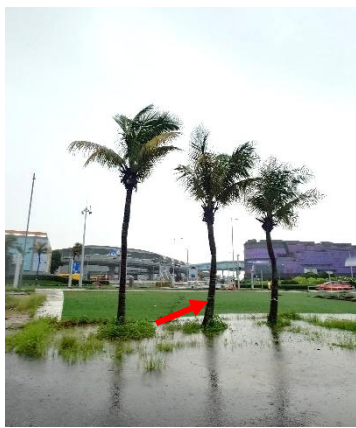
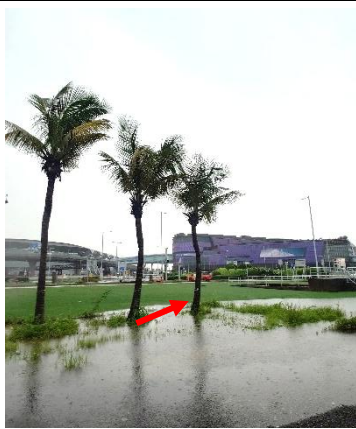
| Tree ID | Transplant Date | Management Stage                                          | Management Agency                        | Remarks                                                                                                                                                                                                                        |
|---------|-----------------|-----------------------------------------------------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| T1498   | 29 Jun 2021     | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK                                     |                                                                                                                                                                                                                                |
| T1499   | 29 Jun 2021     | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK                                     |                                                                                                                                                                                                                                |
| T1500   | 30 Jun 2021     | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK                                     |                                                                                                                                                                                                                                |
| T1501   | 30 Jun 2021     | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK                                     |                                                                                                                                                                                                                                |
| T1502   | 5 Jul 2021      | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK                                     |                                                                                                                                                                                                                                |
| T1503   | 6 Jul 2021      | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK                                     |                                                                                                                                                                                                                                |
| T1504   | 24 Jun 2021     | <u>Long Term Management period</u><br>Aug 2022 – Jul 2031 | AAHK                                     |                                                                                                                                                                                                                                |
| CT1194  | 4 May 2018      | <u>Long Term Management period</u><br>Jun 2019 – May 2028 | Southern Landside Petrol Filling Station | Establishment Period was completed. Uprooted and collapsed due to Typhoon Higos on 18 August 2020. Tree removal was conducted as recommended by tree specialist of the contractor of Southern Landside Petrol Filling Station. |
| CT1794  | 3 May 2018      | <u>Long Term Management period</u><br>Jun 2019 – May 2028 | AsiaWorld-Expo                           | Establishment Period was completed. The tree within the land parcel was acquired by the government for construction of emergency hospital to handle COVID19 pandemic at AsiaWorld-Expo. The tree was felled in late 2020.      |



| Tree ID | Transplant Date | Management Stage                                          | Management Agency | Remarks                                                                                                                                                                                                                   |
|---------|-----------------|-----------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CT1795  | 3 May 2018      | <u>Long Term Management period</u><br>Jun 2019 – May 2028 | AsiaWorld-Expo    | Establishment Period was completed. The tree within the land parcel was acquired by the government for construction of emergency hospital to handle COVID19 pandemic at AsiaWorld-Expo. The tree was felled in late 2020. |

**Table 7.7: Photos of the Existing Transplanted Tree**

|                                                                                     |                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   |   |   |
| T1493                                                                               | T1494                                                                               | T1495                                                                                |
|  |  |  |
| T1496                                                                               | T1497                                                                               | T1498                                                                                |

|                                                                                    |                                                                                    |                                                                                     |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   |   |   |
| T1499                                                                              | T1500                                                                              | T1501                                                                               |
|  |  |  |
| T1502                                                                              | T1503                                                                              | T1504                                                                               |

### 7.3 Land Contamination Assessment

The Supplementary CAP was submitted to EPD pursuant to EP Condition 2.20. The CARs for Golf Course and T2 Emergency Power Supply Systems (EPSS) were submitted to EPD in accordance with EP Condition 1.9 and the Supplementary CAP in which no land contamination issues were identified. EPD issued no further comment for aforesaid CARs. No leakage was found after the removal of underground fuel pipelines of T2 EPSS and all required additional photos have been submitted to EPD.

According to the approved supplementary CAP, there are 3 remaining locations where site re-appraisal / additional site investigation is proposed. The site re-appraisal summary report for Fire Training Facility was submitted and accepted by EPD on 20 December 2023. The status of site re-appraisal/ additional site investigation of the 2 remaining locations (Fuel Tank Room to the west of CAD Antenna Farm and Airside Petrol Filling Station) shall be further updated upon latest development programme is available.

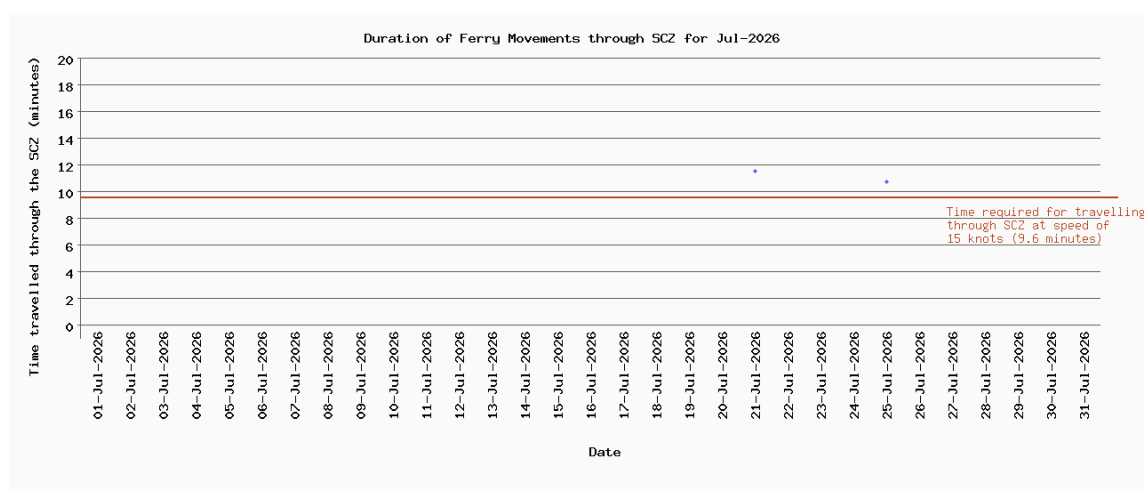
### 7.4 Audit of SkyPier High Speed Ferries

The Marine Travel Routes and Management Plan for High Speed Ferries of SkyPier (the SkyPier Plan) was submitted to the Advisory Council on the Environment for comment and subsequently submitted to and approved by EPD in November 2015 under EP Condition 2.10. The approved SkyPier Plan is available on the dedicated website of the Project. In the SkyPier Plan, AAHK has committed to implement the mitigation measure of requiring HSFs of SkyPier travelling between HKIA and Zhuhai/Macau to start diverting the route with associated speed control across the area,

i.e. Speed Control Zone (SCZ), with high CWD abundance. The route diversion and speed restriction at the SCZ have been implemented since 28 December 2015.

During the reporting period, the SkyPier HSFs travelling to and from Zhuhai remained suspended. The key audit findings for SkyPier HSFs travelling to / from Macau against the requirements of the SkyPier Plan during the reporting period are summarised in **Table 7.8**. A total of 2 ferry movements between HKIA SkyPier and Macau were recorded and the data are presented in **Appendix E**. The time spent by the SkyPier HSFs travelling through the SCZ in July 2026 is presented in **Figure 7.1**. It will take 9.6 minutes to travel through the SCZ when the SkyPier HSFs adopt the maximum allowable speed of 15 knots with the SCZ. **Figure 7.1** shows that all the SkyPier HSFs spent more than 9.6 minutes to travel through the SCZ.

**Figure 7.1: Duration of the SkyPier HSFs travelling through the SCZ for July 2026**



Note: Data above the red line indicated that the time spent by the SkyPier HSFs travelling through the SCZ is more than 9.6 minutes, which is in compliance with the SkyPier Plan.

**Table 7.8: Summary of Key Audit Findings against the SkyPier Plan**

| Requirements in the SkyPier Plan                                            | 1 to 31 July 2026                                                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Total number of ferry movements recorded and audited for HSFs to/from Macau | 2                                                                                                                                                                                                                                                                                  |
| Use diverted route and enter / leave SCZ through Gate Access Points         | 0 deviation                                                                                                                                                                                                                                                                        |
| Speed control in speed control zone                                         | The average speed of all HSFs travelling through the SCZ ranged from 11.8 to 12.7 knots. All HSFs travelled through the SCZ with average speed under 15 knots in compliance with the SkyPier Plan. The time used by HSFs to travel through SCZ is presented in <b>Figure 7.1</b> . |

## 7.5 Audit of Construction and Associated Vessels

The updated MTRMP-CAV was approved by EPD on 16 May 2025 under EP Condition 2.9. The approved MTRMP-CAV is available on the dedicated website of the Project.

During the reporting period, the ET carried out the following key actions:

- During the reporting period, no skippers were trained by the ET / contractor's EO. To date, a total of 1946 skippers were trained from August 2016 to July 2026.



- Marine travel routes records submitted by contractors were reviewed. Deviation case such as vessel not turning on AIS was identified. The concerned contractor provided toolbox training to the concerned skipper to prevent recurrence. The relevant contractor was reminded to adhere to the requirements outlined in the MTRMP-CAV.
- Three-month rolling programmes, consisting of one month of actual records and three months of forecasted activities for construction vessel activities were received from the contractors. These programmes aim to help maintain the number of construction and associated vessels on site at a practically minimal level.

## 7.6 Implementation of Dolphin Exclusion Zone

The DEZ Plan was submitted in accordance with EP Condition 3.1 (v) requirement and Section 10.3 of the Manual and approved in April 2016 by EPD. During the reporting period, no DEZ implementation measures were conducted.

## 7.7 Status of Submissions under Environmental Permits

The current status of submissions under the EP up to the reporting period is presented in **Table 7.9**.

**Table 7.9: Status of Submissions under Environmental Permit**

| EP Condition | Submission                                                                       | Status                     |
|--------------|----------------------------------------------------------------------------------|----------------------------|
| 2.1          | Complaint Management Plan                                                        |                            |
| 2.4          | Management Organizations                                                         |                            |
| 2.5          | Construction Works Schedule and Location Plans                                   |                            |
| 2.7          | Marine Park Proposal                                                             |                            |
| 2.8          | Marine Ecology Conservation Plan                                                 |                            |
| 2.9          | Marine Travel Routes and Management Plan for Construction and Associated Vessels |                            |
| 2.10         | Marine Travel Routes and Management Plan for High Speed Ferries of SkyPier       |                            |
| 2.11         | Marine Mammal Watching Plan                                                      |                            |
| 2.12         | Coral Translocation Plan                                                         | Accepted / approved by EPD |
| 2.13         | Fisheries Management Plan                                                        |                            |
| 2.14         | Egrettry Survey Plan                                                             |                            |
| 2.15         | Silt Curtain Deployment Plan                                                     |                            |
| 2.16         | Spill Response Plan                                                              |                            |
| 2.17         | Detailed Plan on Deep Cement Mixing                                              |                            |
| 2.18         | Landscape & Visual Plan                                                          |                            |
| 2.19         | Waste Management Plan                                                            |                            |
| 2.20         | Supplementary Contamination Assessment Plan                                      |                            |
| 2.21         | Procedures for Mitigation of Aircraft Noise                                      |                            |
| 2.22         | Updated NEF25 Contour                                                            |                            |

| EP Condition | Submission                                       | Status |
|--------------|--------------------------------------------------|--------|
| 2.23         | Aircraft Noise Monitoring Plan                   |        |
| 2.24         | Airport Operation related Emissions Control Plan |        |
| 2.25         | Operational Phase Waste Management Plan          |        |
| 3.1          | Updated EM&A Manual                              |        |
| 3.4          | Baseline Monitoring Reports                      |        |

## 7.8 Compliance with Other Statutory Environmental Requirements

During the reporting period, environmental related licenses and permits required for the construction activities were checked. No non-compliance with environmental statutory requirements was recorded. The latest statuses of the environmental licenses and permits in the reporting period are presented in **Appendix C**.

## 7.9 Analysis and Interpretation of Complaints, Notification of Summons and Status of Prosecutions

### 7.9.1 Complaints

No construction activities-related complaint was received during the reporting period.

### 7.9.2 Notifications of Summons or Status of Prosecution

Neither notification of summons nor prosecution was received during the reporting period.

### 7.9.3 Cumulative Statistics

Cumulative statistics on complaints, notifications of summons and status of prosecutions are summarised in **Appendix D**.

## 8 Future Key Issues and Other EIA & EM&A Issues

### 8.1 Construction Programme for the Coming Reporting Period

Key activities anticipated in the next reporting period for the Project will include the following.

#### **Reclamation Works:**

##### **Contract 3206 Main Reclamation Works**

- Placement of armour rocks and berm stones, and miscellaneous works at eastern seawall.

#### **Airfield Works:**

##### **Contract 3305 Airfield Ground Lighting System**

- Defects rectification.

##### **Contract 3310 North Runway Modification Works**

- Reinforced concrete works and architectural, builder's work and finishing (ABWF) works; and
- Earthworks, excavation, site clearance and fencing installation at apron.

#### **Terminal 2 Concourse and Apron Works:**

##### **Contract 3408 Third Runway Concourse and Apron Works**

- Building services, ABWF, cable laying, utilities, pavement; and
- Operation of concrete batching plant.

#### **Terminal 2 Expansion:**

##### **Contract 3508 Terminal 2 Expansion Works**

- ABWF, electrical & mechanical (E&M), roof and hard landscape works; and
- Deck, parapet, utilities, road works and abutment construction.

#### **Automated People Mover and Baggage Handling System:**

##### **Contract 3601 New Automated People Mover System (TRC Line)**

- Guide beam installation and concrete plinth; and
- Installation of power rail, cable containment, cabling and termination, track side equipment and platform screen door.

##### **Contract 3602 Existing APM System Modification Works**

- Guide rail installation.

##### **Contract 3603 Baggage Handling System (BHS)**

- CCTV, fire service installation; and
- Conveyor, electrical, mechanical installation and steel work.

#### **Airport Support Infrastructure:**

##### **Contract 3802 APM and BHS Tunnels and Related Works**

- Drainage works, backfilling, box culvert, superstructure construction; and
- APM & BHS Tunnel construction and ABWF.

##### **Contract 3805 New Airport District Police Operational Base**

- Architectural, builder's work and finishing and electrical & mechanical works.

#### **Construction Support:**

##### **Contract 3901A Concrete Batching Facility**

- Operation of concrete batching plant and material conveyor belt.

#### **Contract 3901B Concrete Batching Facility**

- Demolition works of concrete batching plant.

#### **Contract 3913 Asphalt Batching Plant**

- Operation of asphalt batching plant A.

#### **Construction of New Gravity Sewer:**

#### **Contract C24W08 Sewerage Upgrading Works**

- Hoarding works; and
- Excavation and lateral support works.

## **8.2 Key Environmental Issues for the Coming Reporting Period**

### **8.2.1 Construction Activities in the Coming Reporting Period**

The key environmental issues for the Project in the coming reporting period are expected to be associated with the construction activities include:

- Generation of dust from construction works and stockpiles;
- Generation of site surface runoffs and wastewater from activities on-site;
- Sorting, recycling, storage and disposal of general refuse and construction waste; and
- Management of chemicals and avoidance of oil spillage on-site.

The implementation of required mitigation measures by the contractors will be monitored by the ET.

## **8.3 Review of the Key Assumptions Adopted in the EIA Report**

With reference to Appendix E of the Manual, it is noted that the key assumptions adopted in approved EIA report for the construction phase are still valid and no major changes are involved. The environmental mitigation measures recommended in the approved EIA Report remain applicable and shall be implemented in undertaking construction works for the Project.

## 9 Conclusion and Recommendation

The new North Runway was commissioned in November 2022. Following the completion of reconfiguration works on the Centre Runway, the 3RS was commissioned on 28 November 2024. The expanded Terminal 2 (T2) was launched in phases, with the coach hall commencing operation on 23 September 2025, and passenger departures facilities commencing operation on 27 May 2026. In addition, the sewerage upgrading works which comprise the construction of a new gravity sewer with a diameter of at least 1,200 mm adjacent to the existing gravity sewer commenced on 15 June 2026 and the diversion of sewage flow arising from the airport to the Siu Ho Wan Sewage Treatment Works will start within 3 years after the operation of the Project.

The key activities of the Project carried out in the reporting period are located in reclamation areas and existing airport island respectively. Works in the reclamation areas included concourse superstructure works, pavement works, tunnel works for APM and BHS and associated works. Meanwhile, works on the existing airport island involved buildings services and architectural works, modification and tunnel works for APM and BHS, utilities works, road and drainage works.

During the reporting period, all the monitoring works for construction waste and landscape & visual were conducted in accordance with the Manual, with no exceedances or non-conformities recorded.

Weekly site inspections were carried out by the ET and bi-weekly site inspections were carried out by IEC to audit the implementation of proper environmental pollution control and mitigation measures for the Project. Site inspection findings were recorded in the site inspection checklists and provided to the contractors to follow-up.

On the implementation of the SkyPier Plan, SkyPier HSF services to and from Zhuhai remained suspended and a total of 2 HSF movements between HKIA SkyPier and Macau under the SkyPier Plan were recorded in the reporting period. The average speed of all HSFs travelling through the SCZ ranged from 11.8 to 12.7 knots. All HSFs travelled through the SCZ with average speed under 15 knots in compliance with the SkyPier Plan.

For the implementation of MTRMP-CAV, marine travel routes records submitted by contractors were reviewed by the ET. Deviation case was identified such as vessel not turning on AIS. The concerned contractor provided toolbox training to the concerned skipper to prevent recurrence. The concerned contractor was reminded to comply with the requirements outlined in the MTRMP-CAV. Three-month rolling programmes for construction vessel activities, which ensure the proposed vessels are necessary and minimal through good planning, were also received from contractors.



# Figures

Note: The locations are for indicative purpose. The actual construction work locations are in accordance with the construction work programme

**Appendix A. Environmental Mitigation  
Implementation Schedule (EMIS) for  
Construction Phase**

# Environmental Mitigation Implementation Schedule (EMIS) for Construction Phase

| EIA Ref.                                       | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^ |
|------------------------------------------------|-----------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------------------|
| <b>Air Quality Impact – Construction Phase</b> |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                     |                                   |
| 5.2.6.2                                        | 2.1       | -            | <b>Dust Control Measures</b> <ul style="list-style-type: none"> <li>Water spraying for 12 times a day or once every two hours for 24-hour working at all active works area.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Within construction site / Duration of the construction phase       | I                                 |
| 5.2.6.3                                        | 2.1       | -            | <ul style="list-style-type: none"> <li>Covering of at least 80% of the stockpiling area by impervious sheets. Water spraying of all dusty materials immediately prior to any loading transfer operation so as to keep the dusty material wet during material handling.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Within construction site / Duration of the construction phase       | I                                 |
| 5.2.6.4                                        | 2.1       | -            | Dust control practices as stipulated in the Air Pollution Control (Construction Dust) Regulation should be adopted. These practices include:<br>Good Site Management <ul style="list-style-type: none"> <li>Good site management is important to help reducing potential air quality impact down to an acceptable level. As a general guide, the Contractor should maintain high standard of housekeeping to prevent emission of fugitive dust. Loading, unloading, handling and storage of raw materials, wastes or by-products should be carried out in a manner so as to minimise the release of visible dust emission. Any piles of materials accumulated on or around the work areas should be cleaned up regularly. Cleaning, repair and maintenance of all plant facilities within the work areas should be carried out in a manner minimising generation of fugitive dust emissions. The material should be handled properly to prevent fugitive dust emission before cleaning.</li> </ul> | Within construction site / Duration of the construction phase       | I                                 |
|                                                |           |              | Disturbed Parts of the Roads <ul style="list-style-type: none"> <li>Each and every main temporary access should be paved with concrete, bituminous hardcore materials or metal plates and kept clear of dusty materials; or</li> <li>Unpaved parts of the road should be sprayed with water or a dust suppression chemical so as to keep the entire road surface wet.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Within construction site / Duration of the construction phase       | I                                 |
|                                                |           |              | Exposed Earth <ul style="list-style-type: none"> <li>Exposed earth should be properly treated by compaction, hydroseeding, vegetation planting or seating with latex, vinyl, bitumen within six months after the last construction activity on the site or part of the site where the exposed earth lies.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within construction site / Duration of the construction phase       | I                                 |
|                                                |           |              | Loading, Unloading or Transfer of Dusty Materials <ul style="list-style-type: none"> <li>All dusty materials should be sprayed with water immediately prior to any loading or transfer operation so as to keep the dusty material wet.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Within construction site / Duration of the construction phase       | I                                 |

| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^ |
|----------|-----------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------------------|
|          |           |              | <p>Debris Handling</p> <ul style="list-style-type: none"> <li>Any debris should be covered entirely by impervious sheeting or stored in a debris collection area sheltered on the top and the three sides; and</li> <li>Before debris is dumped into a chute, water should be sprayed so that it remains wet when it is dumped.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Within construction site / Duration of the construction phase       | I                                 |
|          |           |              | <p>Transport of Dusty Materials</p> <ul style="list-style-type: none"> <li>Vehicle used for transporting dusty materials/spoils should be covered with tarpaulin or similar material. The cover should extend over the edges of the sides and tailboards.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Within construction site / Duration of the construction phase       | I                                 |
|          |           |              | <p>Wheel washing</p> <ul style="list-style-type: none"> <li>Vehicle wheel washing facilities should be provided at each construction site exit. Immediately before leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Within construction site / Duration of the construction phase       | I                                 |
|          |           |              | <p>Use of vehicles</p> <ul style="list-style-type: none"> <li>The speed of the trucks within the site should be controlled to about 10km/hour in order to reduce adverse dust impacts and secure the safe movement around the site;</li> <li>Immediately before leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels; and</li> <li>Where a vehicle leaving the construction site is carrying a load of dusty materials, the load should be covered entirely by clean impervious sheeting to ensure that the dusty materials do not leak from the vehicle.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Within construction site / Duration of the construction phase       | I                                 |
|          |           |              | <p>Site hoarding</p> <ul style="list-style-type: none"> <li>Where a site boundary adjoins a road, street, service lane or other area accessible to the public, hoarding of not less than 2.4m high from ground level should be provided along the entire length of that portion of the site boundary except for a site entrance or exit.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Within construction site / Duration of the construction phase       | I                                 |
| 5.2.6.5  | 2.1       | -            | <p><b>Best Practices for Concrete Batching Plant</b></p> <p>The relevant best practices for dust control as stipulated in the Guidance Note on the Best Practicable Means for Cement Works (Concrete Batching Plant) BPM 3/2 as well as in the future Specified Process licence should be adopted. The best practices are recommended to be applied to both the land based and floating concrete batching plants. Best practices include:</p> <p>Cement and other dusty materials</p> <ul style="list-style-type: none"> <li>The loading, unloading, handling, transfer or storage of cement, pulverised fuel ash (PFA) and/or other equally dusty materials shall be carried in a totally enclosed system acceptable to EPD. All dust-laden air or waste gas generated by the process operations shall be properly extracted and vented to fabric filtering system to meet the required emission limit;</li> <li>Cement, PFA and/or other equally dusty materials shall be stored in storage silo fitted with audible high-level alarms to warn of over-filling. The high-level alarm indicators shall be interlocked with the material</li> </ul> | Within Concrete Batching Plant / Duration of the construction phase | I                                 |

| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Location / Duration of measures<br>Timing of completion of measures        | Mitigation Measures Implemented?^ |
|----------|-----------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|-----------------------------------|
|          |           |              | <p>filling line such that in the event of the silo approaching an overfilling condition, an audible alarm will operate, and after 1 minute or less the material filling line will be closed;</p> <ul style="list-style-type: none"> <li>▪ Vents of all silos shall be fitted with fabric filtering system to meet the required emission limit;</li> <li>▪ Vents of cement/PFA weighing scale shall be fitted with fabric filtering system to meet the required emission limit; and</li> <li>▪ Seating of pressure relief valves of all silos shall be checked, and the valves re-seated if necessary, before each delivery.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                            |                                   |
|          |           |              | <p>Other raw materials</p> <ul style="list-style-type: none"> <li>▪ The loading, unloading, handling, transfer or storage of other raw materials which may generate airborne dust emissions such as crushed rock, sand, stone aggregate, shall be carried out in such a manner to prevent or minimize dust emissions;</li> <li>▪ The materials shall be adequately wetted prior to and during the loading, unloading and handling operations. Manual or automatic water spraying system shall be provided at all unloading areas, stockpiles and material discharge points;</li> <li>▪ All receiving hoppers for unloading relevant materials shall be enclosed on three sides up to 3 m above the unloading point. In no case shall these hoppers be used as the material storage devices;</li> <li>▪ The belt conveyor for handling materials shall be enclosed on top and two sides with a metal board at the bottom to eliminate any dust emission due to wind-whipping effect. Other type of enclosure will also be accepted by EPD if it can be demonstrated that the proposed enclosure can achieve same performance;</li> <li>▪ All conveyor transfer points shall be totally enclosed. Openings for the passage of conveyors shall be fitted with adequate flexible seals;</li> <li>▪ Scrapers shall be provided at the turning points of all conveyors to remove dust adhered to the belt surface;</li> <li>▪ Conveyors discharged to stockpiles of relevant materials shall be arranged to minimize free fall as far as practicable. All free falling transfer points from conveyors to stockpiles shall be enclosed with chute(s) and water sprayed;</li> <li>▪ Aggregates with a nominal size less than or equal to 5 mm should be stored in totally enclosed structure such as storage bin and should not be handled in open area. Where there is sufficient buffer area surrounding the concrete batching plant, ground stockpiling may be used;</li> <li>▪ The stockpile shall be enclosed at least on top and three sides and with flexible curtain to cover the entrance side;</li> <li>▪ Aggregates with a nominal size greater than 5 mm should preferably be stored in a totally enclosed structure. If open stockpiling is used, the stockpile shall be enclosed on three sides with the enclosure wall sufficiently higher than the top of the stockpile to prevent wind whipping; and</li> <li>▪ The opening between the storage bin and weighing scale of the materials shall be fully enclosed.</li> </ul> | <p>Within Concrete Batching Plant / Duration of the construction phase</p> | I                                 |

| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Location / Duration of measures<br>Timing of completion of measures  | Mitigation Measures Implemented?^ |
|----------|-----------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------------------------------|
|          |           |              | <p>Loading of materials for batching</p> <ul style="list-style-type: none"> <li>Concrete truck shall be loaded in such a way as to minimise airborne dust emissions. The following control measures shall be implemented: <ul style="list-style-type: none"> <li>(a) Pre-mixing the materials in a totally enclosed concrete mixer before loading the materials into the concrete truck is recommended. All dust-laden air generated by the pre-mixing process as well as the loading process shall be totally vented to fabric filtering system to meet the required emission limit; and</li> <li>(b) If truck mixing batching or other types of batching method is used, effective dust control measures acceptable to EPD shall be adopted. The dust control measures must have been demonstrated to EPD that they are capable to collect and vent all dust-laden air generated by the material loading/mixing to dust arrestment plant to meet the required emission limit.</li> </ul> </li> <li>The loading bay shall be totally enclosed during the loading process.</li> </ul>                          | Within Concrete Batching Plant / Duration of the construction phase  | I                                 |
|          |           |              | <p>Vehicles</p> <ul style="list-style-type: none"> <li>All practicable measures shall be taken to prevent or minimize the dust emission caused by vehicle movement; and</li> <li>All access and route roads within the premises shall be paved and adequately wetted.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within Concrete Batching Plant / Duration of the construction phase  | I                                 |
|          |           |              | <p>Housekeeping</p> <ul style="list-style-type: none"> <li>A high standard of housekeeping shall be maintained. All spillages or deposits of materials on ground, support structures or roofs shall be cleaned up promptly by a cleaning method acceptable to EPD. Any dumping of materials at open area shall be prohibited.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Within Concrete Batching Plant / Duration of the construction phase  | I                                 |
| 5.2.6.6  | 2.1       | -            | <p><b>Best Practices for Asphaltic Concrete Plant</b></p> <p>The relevant best practices for dust control as stipulated in the Guidance Note on the Best Practicable Means for Tar and Bitumen Works (Asphaltic Concrete Plant) BPM 15 (94) as well as in the future Specified Process licence should be adopted. These include:</p> <p>Design of Chimney</p> <ul style="list-style-type: none"> <li>The chimney shall not be less than 3 metres plus the building height or 8 metres above ground level, whichever is the greater;</li> <li>The efflux velocity of gases from the main chimney shall not be less than 12 m/s at full load condition;</li> <li>The flue gas exit temperature shall not be less than the acid dew point; and</li> <li>Release of the chimney shall be directed vertically upwards and not be restricted or deflected.</li> </ul> <p>Cold feed side</p> <ul style="list-style-type: none"> <li>The aggregates with a nominal size less than or equal to 5 mm shall be stored in totally enclosed structure such as storage bin and shall not be handled in open area;</li> </ul> | Within Asphaltic Concrete Plant / Duration of the construction phase | I                                 |
|          |           |              | <p>Cold feed side</p> <ul style="list-style-type: none"> <li>The aggregates with a nominal size less than or equal to 5 mm shall be stored in totally enclosed structure such as storage bin and shall not be handled in open area;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Within Asphaltic Concrete Plant / Duration of the construction phase | I                                 |

| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Location / Duration of measures<br>Timing of completion of measures  | Mitigation Measures Implemented?^ |
|----------|-----------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------------------------------|
|          |           |              | <ul style="list-style-type: none"> <li>Where there is sufficient buffer area surrounding the plant, ground stockpiling may be used. The stockpile shall be enclosed at least on top and three sides and with flexible curtain to cover the entrance side. If these aggregates are stored above the feeding hopper, they shall be enclosed at least on top and three sides and be wetted on the surface to prevent wind-whipping;</li> <li>The aggregates with a nominal size greater than 5 mm should preferably be stored in totally enclosed structure. Aggregates stockpile that is above the feeding hopper shall be enclosed at least on top and three sides. If open stockpiling is used, the stockpiles shall be enclosed on three sides with the enclosure wall sufficiently higher than the top of the stockpile to prevent wind whipping;</li> <li>Belt conveyors shall be enclosed on top and two sides and provided with a metal board at the bottom to eliminate any dust emission due to the wind-whipping effect. Other type of enclosure will also be accepted by EPD if it can be demonstrated that the proposed enclosure can be achieve the same performance;</li> <li>Scrapers shall be provided at the turning points of all belt conveyors inside the chute of the transfer points to remove dust adhered to the belt surface;</li> <li>All conveyor transfer points shall be totally enclosed. Openings for the passages of conveyors shall be fitted with adequate flexible seals; and</li> <li>All materials returned from dust collection system shall be transferred in enclosed system and shall be stored inside bins or enclosures.</li> </ul> |                                                                      |                                   |
|          |           |              | <p>Hot feed side</p> <ul style="list-style-type: none"> <li>The inlet and outlet of the rotary dryer shall be enclosed and ducted to a dust extraction and collection system such as a fabric filter. The particulate and gaseous concentration at the exhaust outlet of the dust collector shall not exceed the required limiting values;</li> <li>The bucket elevator shall be totally enclosed and the air be extracted and ducted to a dust collection system to meet the required particulates limiting value;</li> <li>All vibratory screens shall be totally enclosed and dust tight with close-fitted access inspection opening. Gaskets shall be installed to seal off any cracks and edges of any inspection openings;</li> <li>Chutes for carrying hot material shall be rigid and preferably fitted with abrasion resistant plate inside. They shall be inspected daily for leakages;</li> <li>All hot bins shall be totally enclosed and dust tight with close-fitted access inspection opening. Gaskets shall be installed to seal off any cracks and edges of any inspection openings. The air shall be extracted and ducted to a dust collection system to meet the required particulates limiting value; and</li> <li>Appropriate control measures shall be adopted in order to meet the required bitumen emission limit as well as the ambient odour level (2 odour units).</li> </ul>                                                                                                                                                                                                                                                                     | Within Asphaltic Concrete Plant / Duration of the construction phase | I                                 |
|          |           |              | <p>Material transportation</p> <ul style="list-style-type: none"> <li>The loading, unloading, handling, transfer or storage of other raw materials which may generate airborne dust emissions such as crushed rocks, sands, stone aggregates, reject fines, shall be carried out in such a manner as to minimize dust emissions;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Within Asphaltic Concrete Plant / Duration of the construction phase | I                                 |



| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Location / Duration of measures<br>Timing of completion of measures  | Mitigation Measures Implemented?^                     |
|----------|-----------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------|
|          |           |              | <ul style="list-style-type: none"> <li>Roadways from the entrance of the plant to the product loading points and/or any other working areas where there are regular movements of vehicles shall be paved or hard surfaced; and</li> <li>Haul roads inside the Works shall be adequately wetted with water and/or chemical suppressants by water trucks or water sprayers.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                      |                                                       |
|          |           |              | <p>Control of emissions from bitumen decanting</p> <ul style="list-style-type: none"> <li>The heating temperature of the particular bitumen type and grade shall not exceed the corresponding temperature limit of the same type listed in Appendix 1 of the Guidance Note;</li> <li>Tamper-free high temperature cut-off device shall be provided to shut off the fuel supply or electricity in case the upper limit for bitumen temperature is reached;</li> <li>Proper chimney for the discharge of bitumen fumes shall be provided at high level;</li> <li>The emission of bitumen fumes shall not exceed the required emission limit; and</li> <li>The air-to-fuel ratio shall be properly controlled to allow complete combustion of the fuel. The fuel burners, if any, shall be maintained properly and free from carbon deposits in the burner nozzles.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                   | Within Asphaltic Concrete Plant / Duration of the construction phase | I                                                     |
|          |           |              | <p>Liquid fuel</p> <ul style="list-style-type: none"> <li>The receipt, handling and storage of liquid fuel shall be carried out so as to prevent the release of emissions of organic vapours and/or other noxious and offensive emissions to the air.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Within Asphaltic Concrete Plant / Duration of the construction phase | I                                                     |
|          |           |              | <p>Housekeeping</p> <ul style="list-style-type: none"> <li>A high standard of housekeeping shall be maintained. Waste material, spillage and scattered piles gathered beneath belt conveyors, inside and around enclosures shall be cleared frequently. The minimum clearing frequency is on a weekly basis.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Within Asphaltic Concrete Plant / Duration of the construction phase | I                                                     |
| 5.2.6.7  | 2.1       | -            | <p><b>Best Practices for Rock Crushing Plants</b></p> <p>The relevant best practices for dust control as stipulated in the Guidance Note on the Best Practicable Means for Mineral Works (Stone Crushing Plant) BPM 11/1 (95) as well as in the future Specified Process licence should be adopted. These include:</p> <p>Crushers</p> <ul style="list-style-type: none"> <li>The outlet of all primary crushers, and both inlet and outlet of all secondary and tertiary crushers, if not installed inside a reasonably dust tight housing, shall be enclosed and ducted to a dust extraction and collection system such as a fabric filter;</li> <li>The inlet hopper of the primary crushers shall be enclosed on top and 3 sides to contain the emissions during dumping of rocks from trucks. The rock while still on the trucks shall be wetted before dumping;</li> <li>Water sprayers shall be installed and operated in strategic locations at the feeding inlet of crushers; and</li> <li>Crusher enclosures shall be rigid and be fitted with self-closing doors and close-fitting entrances and exits. Where conveyors pass through the crusher enclosures, flexible covers shall be installed at entries and exits of the conveyors to the enclosure.</li> </ul> | Within Rock Crushing Plant / Duration of the construction phase      | N/A as there was no rock crushing plant at this stage |

| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^                     |
|----------|-----------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|-------------------------------------------------------|
|          |           |              | <p>Vibratory screens and grizzlies</p> <ul style="list-style-type: none"> <li>All vibratory screens shall be totally enclosed in a housing. Screenhouses shall be rigid and reasonably dust tight with self-closing doors or close-fitted entrances and exits for access. Where conveyors pass through the screenhouse, flexible covers shall be installed at entries and exits of the conveyors to the housing. Where containment of dust within the screenhouse structure is not successful then a dust extraction and collection system shall be provided; and</li> <li>All grizzlies shall be enclosed on top and 3 sides and sufficient water sprayers shall be installed at their feeding and outlet areas.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Within Rock Crushing Plant / Duration of the construction phase     | N/A as there was no rock crushing plant at this stage |
|          |           |              | <p>Belt conveyors</p> <ul style="list-style-type: none"> <li>Except for those conveyors which are placed within a totally enclosed structure such as a screenhouse or those erected at the ground level, all conveyors shall be totally enclosed with windshield on top and 2 sides;</li> <li>Effective belt scraper such as the pre-cleaner blades made by hard wearing materials and provided with pneumatic tensioner, or equivalent device, shall be installed at the head pulley of designated conveyor as required to dislodge fine dust particles that may adhere to the belt surface and to reduce carry-back of fine materials on the return belt. Bottom plates shall also be provided for the conveyor unless it has been demonstrated that the corresponding belt scraper is effective and well maintained to prevent falling material from the return belt; and</li> </ul> <p>Except for those transfer points which are placed within a totally enclosed structure such as a screenhouse, all transfer points to and from conveyors shall be enclosed. Where containment of dust within the enclosure is not successful, then water sprayers shall be provided. Openings for any enclosed structure for the passage of conveyors shall be fitted with flexible seals.</p> | Within Rock Crushing Plant / Duration of the construction phase     | N/A as there was no rock crushing plant at this stage |
|          |           |              | <p>Storage piles and bins</p> <ul style="list-style-type: none"> <li>Where practicable, free falling transfer points from conveyors to stockpiles shall be fitted with flexible curtains or be enclosed with chutes designed to minimize the drop height. Water sprays shall also be used where required.</li> <li>The surface of all surge piles and stockpiles of blasted rocks or aggregates shall be kept sufficiently wet by water spraying wherever practicable;</li> <li>All open stockpiles for aggregates of size in excess of 5 mm shall be kept sufficiently wet by water spraying where practicable; or</li> <li>The stockpiles of aggregates 5 mm in size or less shall be enclosed on 3 sides or suitably located to minimize wind-whipping. Save for fluctuations in stock or production, the average stockpile shall stay within the enclosure walls and in no case the height of the stockpile shall exceed twice the height of the enclosure walls; and</li> <li>Scattered piles gathered beneath belt conveyors, inside and around enclosures shall be cleared regularly.</li> </ul>                                                                                                                                                                                 | Within Rock Crushing Plant / Duration of the construction phase     | N/A as there was no rock crushing plant at this stage |

| EIA Ref.                                         | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Location / Duration of measures<br>Timing of completion of measures                      | Mitigation Measures Implemented?^                     |
|--------------------------------------------------|-----------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------------------------------------------------------|
|                                                  |           |              | Rock drilling equipment <ul style="list-style-type: none"> <li>▪ Appropriate dust control equipment such as a dust extraction and collection system shall be used during rock drilling activities.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within Rock Crushing Plant / Duration of the construction phase                          | N/A as there was no rock crushing plant at this stage |
| <b>Hazard to Human Life – Construction Phase</b> |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                          |                                                       |
| Table 6.40                                       | 3.2       | -            | <ul style="list-style-type: none"> <li>▪ Precautionary measures should be established to request barges to move away during typhoons.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Construction Site / Construction Period                                                  | I                                                     |
| Table 6.40                                       | 3.2       | -            | <ul style="list-style-type: none"> <li>▪ An appropriate marine traffic management system should be established to minimize risk of ship collision.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Construction Site / Construction Period                                                  | I                                                     |
| Table 6.40                                       | 3.2       | -            | <ul style="list-style-type: none"> <li>▪ Location of all existing hydrant networks should be clearly identified prior to any construction works.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Construction Site / Construction Period                                                  | I                                                     |
| <b>Noise Impact – Construction Phase</b>         |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                          |                                                       |
| 7.5.6                                            | 4.3       | -            | <b>Good Site Practice</b><br>Good site practice and noise management can significantly reduce the impact of construction site activities on nearby NSRs. The following package of measures should be followed during each phase of construction: <ul style="list-style-type: none"> <li>▪ only well-maintained plant to be operated on-site and plant should be serviced regularly during the construction works;</li> <li>▪ machines and plant that may be in intermittent use to be shut down between work periods or should be throttled down to a minimum;</li> <li>▪ plant known to emit noise strongly in one direction, should, where possible, be orientated to direct noise away from the NSRs;</li> <li>▪ mobile plant should be sited as far away from NSRs as possible; and</li> <li>▪ material stockpiles and other structures to be effectively utilised, where practicable, to screen noise from on-site construction activities.</li> </ul> | Within the Project site / During construction phase / Prior to commencement of operation | I                                                     |
| 7.5.6                                            | 4.3       | -            | <b>Adoption of QPME</b> <ul style="list-style-type: none"> <li>▪ QPME should be adopted as far as applicable.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Within the Project site / During construction phase / Prior to commencement of operation | I                                                     |
| 7.5.6                                            | 4.3       | -            | <b>Use of Movable Noise Barriers</b> <ul style="list-style-type: none"> <li>▪ Movable noise barriers should be placed along the active works area and mobile plants to block the direct line of sight between PME and the NSRs.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Within the Project site / During construction phase / Prior to commencement of operation | I                                                     |

| EIA Ref.                                         | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Location / Duration of measures<br>Timing of completion of measures                      | Mitigation Measures Implemented?^                |
|--------------------------------------------------|-----------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|--------------------------------------------------|
| 7.5.6                                            | 4.3       | -            | <b>Use of Noise Enclosure/ Acoustic Shed</b> <ul style="list-style-type: none"> <li>Noise enclosure or acoustic shed should be used to cover stationary PME such as air compressor and generator.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Within the Project site / During construction phase / Prior to commencement of operation | I                                                |
| <b>Water Quality Impact – Construction Phase</b> |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                          |                                                  |
| 8.8.1.2 and 8.8.1.3                              | 5.1       | 2.26         | <b>Marine Construction Activities</b><br><u>General Measures to be Applied to All Works Areas</u> <ul style="list-style-type: none"> <li>Barges or hoppers shall not be filled to a level which will cause overflow of materials or pollution of water during loading or transportation;</li> <li>Use of Lean Material Overboard (LMOB) systems shall be prohibited;</li> <li>Excess materials shall be cleaned from the decks and exposed fittings of barges and hopper dredgers before the vessels are moved;</li> <li>Plants should not be operated with leaking pipes and any pipe leakages shall be repaired quickly;</li> <li>Adequate freeboard shall be maintained on barges to reduce the likelihood of decks being washed by wave action;</li> <li>All vessels shall be sized such that adequate clearance is maintained between vessels and the seabed at all states of the tide to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash;</li> <li>The works shall not cause foam, oil, grease, litter or other objectionable matter to be present in the water within and adjacent to the works site; and</li> <li>For ground improvement activities including DCM, the wash water from cleaning of the drilling shaft should be appropriately treated before discharge. The Contractor should ensure the wastewater meets the WPCO/TM requirements before discharge. No direct discharge of contaminated water is permitted.</li> </ul> | Within construction site / Duration of the construction phase                            | C – Completed in Apr 2022                        |
|                                                  |           |              | <u>Specific Measures to be Applied to All Works Areas</u> <ul style="list-style-type: none"> <li>The daily maximum production rates shall not exceed those assumed in the water quality assessment in the EIA report;</li> <li>A maximum of 10 % fines content to be adopted for sand blanket and 20 % fines content for marine filling below +2.5 mPD prior to substantial completion of seawall (until end of Year 2017) shall be specified in the works contract document;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Within construction site / Duration of the construction phase                            | C – Marine filling works completed in March 2023 |
|                                                  |           |              | <ul style="list-style-type: none"> <li>An advance seawall of at least 200m to be constructed (comprising either rows of contiguous permanent steel cells completed above high tide mark or partially completed seawalls with rock core to high tide mark and filter layer on the inner side) prior to commencement of marine filling activities;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                          | C – Completed in May 2018                        |

| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^                                                                                                                                               |
|----------|-----------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          |           |              | <ul style="list-style-type: none"> <li>Closed grab dredger shall be used to excavate marine sediment;</li> <li>Silt curtains surrounding the closed grab dredger shall be deployed in accordance with the Silt Curtain Deployment Plan; and</li> </ul>                                                                                                                                                                                                                                                           |                                                                     | <p>C – Marine filling works completed in March 2023</p> <p>(The arrangement of silt curtain has been modified. The details can be referred to Silt Curtain Deployment Plan)</p> |
|          |           |              | <ul style="list-style-type: none"> <li>The Silt Curtain Deployment Plan shall be implemented.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                     | <p>C – Completed in Mar 2025 for C7a</p> <p>(All enhanced silt curtain removed since March 2023)</p>                                                                            |
|          |           |              | <p><u>Specific Measures to be Applied to Land Formation Activities prior to Commencement of Marine Filling Works</u></p> <ul style="list-style-type: none"> <li>Double layer 'Type III' silt curtains to be applied around the active eastern works areas prior to commencement of sand blanket laying activities. The silt curtains shall be configured to minimise SS release during ebb tides. A silt curtain efficiency test shall be conducted to validate the performance of the silt curtains;</li> </ul> | Within construction site / Duration of the construction phase       | <p>C – Marine filling works completed in March 2023</p> <p>(The arrangement of silt curtain has been modified. The details can be referred to Silt Curtain Deployment Plan)</p> |
|          |           |              | <ul style="list-style-type: none"> <li>Double layer silt curtains to enclose WSRs C7a and silt screens installed at the intake points for both WSR C7a and C8 prior to commencement of construction; and</li> </ul>                                                                                                                                                                                                                                                                                              |                                                                     | <p>C – Completed in Mar 2025 for C7a</p>                                                                                                                                        |
|          |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                     | <p>C – Completed in Dec 2021 for C8</p> <p>*(The requirement of silt curtain / screen has been modified. The details can be referred to Silt Curtain Deployment Plan)</p>       |
|          |           |              | <ul style="list-style-type: none"> <li>The silt curtains and silt screens should be regularly checked and maintained.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                 |                                                                     | <p>C – Completed in Mar 2025 for C7a</p> <p>(All enhanced silt curtain removed since March 2023)</p>                                                                            |

| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^                                                                                                                                               |
|----------|-----------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          |           |              | <p><u>Specific Measures to be Applied to Land Formation Activities during Marine Filling Works</u></p> <ul style="list-style-type: none"> <li>Double layer 'Type II' or 'Type III' silt curtains to be applied around the eastern openings between partially completed seawalls prior to commencement of marine filling activities. The silt curtains shall be configured to minimise SS release during ebb tides;</li> </ul>                                                                                                                       | Within construction site / Duration of the construction phase       | <p>C – Marine filling works completed in March 2023</p> <p>(The arrangement of silt curtain has been modified. The details can be referred to Silt Curtain Deployment Plan)</p> |
|          |           |              | <ul style="list-style-type: none"> <li>Double layer silt curtains to be applied at the south-western opening prior to commencement of marine filling activities;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                         |                                                                     | <p>C – Marine filling works completed in March 2023</p> <p>(The arrangement of silt curtain has been modified. The details can be referred to Silt Curtain Deployment Plan)</p> |
|          |           |              | <ul style="list-style-type: none"> <li>Double layer silt curtain to enclose WSR C7a and silt screens installed at the intake points for both WSR C7a and C8 prior to commencement of marine filling activities; and</li> </ul>                                                                                                                                                                                                                                                                                                                      |                                                                     | <p>C – Completed in Mar 2025 for C7a</p>                                                                                                                                        |
|          |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                     | <p>C – Completed in Dec 2021 for C8</p> <p>(The requirement of silt curtain / screen has been modified. The details can be referred to Silt Curtain Deployment Plan)</p>        |
|          |           |              | <ul style="list-style-type: none"> <li>The silt curtains and silt screens should be regularly checked and maintained.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                     | <p>C – Completed in Mar 2025 for C7a</p> <p>(All enhanced silt curtain removed since March 2023)</p>                                                                            |
|          |           |              | <p><u>Specific Measures to be Applied to the Field Joint Excavation Works for the Submarine Cable Diversion</u></p> <ul style="list-style-type: none"> <li>Only closed grabs designed and maintained to avoid spillage shall be used and should seal tightly when operated. Excavated materials shall be disposed at designated marine disposal area in accordance with the Dumping at Sea Ordinance (DASO) permit conditions; and</li> <li>Silt curtains surrounding the closed grab dredger to be deployed as a precautionary measure.</li> </ul> | Within construction site / Duration of the construction phase       | <p>N/A – the field joint excavation works for the submarine cable diversion will no longer be</p>                                                                               |

| EIA Ref.           | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Location / Duration of measures<br>Timing of completion of measures   | Mitigation Measures Implemented?^                                                                         |
|--------------------|-----------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
|                    |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                       | conducted anymore                                                                                         |
| 8.8.1.4            | 5.1       | -            | <b>Modification of the Existing Seawall</b> <ul style="list-style-type: none"> <li>Silt curtains shall be deployed around the seawall modification activities to completely enclose the active works areas, and care should be taken to avoid splashing of rockfill / rock armour into the surrounding marine environment. For the connecting sections with the existing outfalls, works for these connection areas should be undertaken during the dry season in order that individual drainage culvert cells may be isolated for interconnection works.</li> </ul>                                                                                                                                                                          | At the existing northern seawall / Duration of the construction phase | N/A – no marine-based seawall modification works undertaken after land formation.                         |
| 8.8.1.5            | 5.1       | -            | <b>Construction of New Stormwater Outfalls and Modifications to Existing Outfalls</b> <ul style="list-style-type: none"> <li>During operation of the temporary drainage channel, runoff control measures such as bunding or silt fence shall be provided on both sides of the channel to prevent accumulation and release of SS via the temporary channel. Measures should also be taken to minimise the ingress of site drainage into the culvert excavations.</li> </ul>                                                                                                                                                                                                                                                                    | Within construction site / Duration of the construction phase         | I                                                                                                         |
| 8.8.1.6<br>8.8.1.7 | 5.1       | 2.27         | <b>Piling Activities for Construction of New Runway Approach Lights and HKIAAA Marker Beacons</b> <p>Silt curtains shall be deployed around the piling activities to completely enclose the piling works and care should be taken to avoid spillage of excavated materials into the surrounding marine environment.</p>                                                                                                                                                                                                                                                                                                                                                                                                                       | Within construction site / Duration of the construction phase         | C – For approach lights<br><br>N/A for marker beacons as HKIAAA Marker Beacons would be replaced by buoys |
|                    |           |              | <u>For construction of the eastern approach lights at the CMPs</u> <ul style="list-style-type: none"> <li>Ground improvement via DCM using a close-spaced layout shall be completed prior to commencement of piling works;</li> <li>Steel casings shall be installed to enclose the excavation area prior to commencement of excavation;</li> <li>The excavated materials shall be removed using a closed grab within the steel casings;</li> <li>No discharge of the cement mixed materials into the marine environment will be allowed; and</li> <li>Excavated materials shall be treated and reused on-site.</li> </ul>                                                                                                                    |                                                                       | C – Completed in Oct 2021                                                                                 |
| 8.8.1.8            | 5.1       | -            | <b>Construction of Site Runoff and Drainage</b> <p>The site practices outlined in ProPECC Note PN 1/94 should be followed as far as practicable in order to minimise surface runoff and the chance of erosion. The following measures are recommended:</p> <ul style="list-style-type: none"> <li>Install perimeter cut-off drains to direct off-site water around the site and implement internal drainage, erosion and sedimentation control facilities. Channels, earth bunds or sandbag barriers should be provided on site to direct storm water to silt removal facilities. The design of the temporary on-site drainage system should be undertaken by the Contractors prior to the commencement of construction (for works</li> </ul> | Within construction site / Duration of the construction phase         | I                                                                                                         |

| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^ |
|----------|-----------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------------------|
|          |           |              | areas located on the existing Airport island) or as soon as the new land is completed (for works areas located on the new landform);                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                     |                                   |
|          |           |              | <ul style="list-style-type: none"> <li>Sand/silt removal facilities such as sand/silt traps and sediment basins should be provided to remove sand/silt particles from runoff to meet the requirements of the TM-DSS standards under the WPCO. The design of efficient silt removal facilities should make reference to the guidelines in Appendix A1 of ProPECC Note PN 1/94. Sizes may vary depending upon the flow rate. The detailed design of the sand/silt traps should be undertaken by the Contractors prior to the commencement of construction;</li> </ul>                                                                                                                                                                                                                                                   |                                                                     | I                                 |
|          |           |              | <ul style="list-style-type: none"> <li>All drainage facilities and erosion and sediment control structures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit should be regularly removed, at the onset of and after each rainstorm to ensure that these facilities are functioning properly;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                     | I                                 |
|          |           |              | <ul style="list-style-type: none"> <li>Measures should be taken to minimize the ingress of site drainage into excavations. If excavation of trenches in wet periods is necessary, they should be dug and backfilled in short sections wherever practicable. Water pumped out from foundation excavations should be discharged into storm drains via silt removal facilities;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                     | I                                 |
|          |           |              | <ul style="list-style-type: none"> <li>In the event that contaminated groundwater is identified at excavation areas, this should be treated on-site using a suitable wastewater treatment process. The effluent should be treated according to the requirements of the TM-DSS standards under the WPCO prior to discharge to foul sewers or collected for proper disposal off-site. No direct discharge of contaminated groundwater is permitted; and</li> </ul>                                                                                                                                                                                                                                                                                                                                                      |                                                                     | I                                 |
|          |           |              | <ul style="list-style-type: none"> <li>All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. An adequately designed and sited wheel washing facility should be provided at construction site exits. Wash-water should have sand and silt settled out and removed regularly to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel-wash bay to the public road should be paved with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains. All washwater should be treated according to the requirements of the TM-DSS standards under the WPCO prior to discharge.</li> </ul> |                                                                     | I                                 |
|          |           |              | <ul style="list-style-type: none"> <li>Open stockpiles of construction materials or construction wastes on-site should be covered with tarpaulin or similar fabric during rainstorms. Measures should be taken to prevent the construction materials, soil, silt or debris from washing away into the drainage system;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                     | I                                 |
|          |           |              | <ul style="list-style-type: none"> <li>Manholes (including newly constructed ones) should be adequately covered and temporarily sealed so as to prevent silt, construction materials or debris being washed into the drainage system and to prevent stormwater runoff being directed into foul sewers; and</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                     | I                                 |
|          |           |              | <ul style="list-style-type: none"> <li>Precautionary measures should be taken at any time of the year when rainstorms are likely. Actions to be taken when a rainstorm is imminent or forecasted are summarized in Appendix A2 of ProPECC Note PN 1/94. This includes actions to be taken during and/or after rainstorms. Particular attention should be paid to the control of silty surface runoff during storm events.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                  |                                                                     | I                                 |



| EIA Ref.                                                           | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^ |
|--------------------------------------------------------------------|-----------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------------------|
| 8.8.1.9                                                            | 5.1       | -            | <b>Sewage Effluent from Construction Workforce</b> <ul style="list-style-type: none"> <li>Temporary sanitary facilities, such as portable chemical toilets, should be employed on-site where necessary to handle sewage from the workforce. A licensed contractor should be employed to provide appropriate and adequate portable toilets and be responsible for appropriate disposal and maintenance.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                         | Within construction site / During construction phase                | I                                 |
| 8.8.1.10<br>8.8.1.11                                               | 5.1       |              | <b>General Construction Activities</b> <ul style="list-style-type: none"> <li>Construction solid waste, debris and refuse generated on-site should be collected, handled and disposed of properly to avoid entering any nearby storm water drain. Stockpiles of cement and other construction materials should be kept covered when not being used; and</li> <li>Oils and fuels should only be stored in designated areas which have pollution prevention facilities. To prevent spillage of fuels and solvents to any nearby storm water drain, all fuel tanks and storage areas should be provided with locks and be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank. The bund should be drained of rainwater after a rain event.</li> </ul>                                                | Within construction site / During construction phase                | I                                 |
| 8.8.1.12<br>8.8.1.13                                               | 5.1       | 2.28         | <b>Drilling Activities for the Submarine Aviation Fuel Pipelines</b><br>To prevent potential water quality impacts at Sha Chau, the following measures shall be applied: <ul style="list-style-type: none"> <li>A 'zero-discharge' policy shall be applied for all activities to be conducted at Sha Chau;</li> <li>No bulk storage of chemicals shall be permitted; and</li> <li>A containment pit shall be constructed around the drill holes. This containment pit shall be lined with impermeable lining and bunded on the outside to prevent inflow from off-site areas.</li> </ul>                                                                                                                                                                                                                                                                  | Within construction site / During construction phase                | C – Completed in Jan 2019         |
|                                                                    |           |              | At the airport island side of the drilling works, the following measures shall be applied for treatment of wastewater: <ul style="list-style-type: none"> <li>During pipe cleaning, appropriate desilting or sedimentation device should be provided on site for treatment before discharge. The Contractor should ensure discharge water from the sedimentation tank meet the WPCO/TM requirements before discharge; and</li> <li>Drilling fluid used in drilling activities should be reconditioned and reused as far as possible. Temporary enclosed storage locations should be provided on-site for any unused chemicals that needs to be transported away after all the related construction activities are completed. The requirements in ProPECC Note PN 1/94 should be adhered to in the handling and disposal of bentonite slurries.</li> </ul> | Within construction site / During construction phase                | C – Completed in Jan 2019         |
| <b>Sewerage and Sewage Treatment Implication – Operation Phase</b> |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                     |                                   |
| 9.7.2                                                              | 6.2       | 2.33         | AAHK undertakes to upgrade the existing gravity sewer by constructing a new gravity sewer with a diameter of 1,200 mm adjacent to the existing gravity sewer (1,050 mm in diameter) and then diverting the sewage flow arising from the airport and other sub-catchment in Tung Chung to the new gravity sewer. The recommended measures to mitigate the secondary impacts on air quality, noise, waste management, water quality and trees arising from the construction works associated with the sewer upgrading works should also be implemented.                                                                                                                                                                                                                                                                                                     | Gravity sewers from the airport discharge manhole to TCSPS          | I                                 |
| <b>Waste Management Implication – Construction Phase</b>           |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                     |                                   |

| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^                                                                                                                                                                                                                                                          |
|----------|-----------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10.5.1.1 | 7.1       | -            | <p>Opportunities to minimise waste generation and maximise the reuse of waste materials generated by the project have been incorporated where possible into the planning, design and construction stages, and the following measures have been recommended:</p> <ul style="list-style-type: none"> <li>▪ The relevant construction methods (particularly for the tunnel works) and construction programme have been carefully planned and developed to minimise the extent of excavation and to maximise the on-site reuse of inert C&amp;D materials generated by the project as far as practicable. Temporary stockpiling areas will also be provided to facilitate on-site reuse of inert C&amp;D materials;</li> <li>▪ Priority should be given to collect and reuse suitable inert C&amp;D materials generated from other concurrent projects and the Government's PFRF as fill materials for the proposed land formation works;</li> <li>▪ Only non-dredged ground improvement methods should be adopted in order to completely avoid the need for dredging and disposal of marine sediment for the proposed land formation work;</li> <li>▪ Excavation work for constructing the APM tunnels, BHS tunnels and airside tunnels will not be down to the CMPs beneath the fill materials in order to avoid excavating any sediments; and</li> <li>▪ For the marine sediments expected to be excavated from the piling works of TRC, APM &amp; BHS tunnels, airside tunnels and other facilities on the proposed land formation area, piling work of marine sections of the approach lights and HKIAAA beacons, basement works for some of T2 expansion area and excavation works for the proposed APM depot should be treated and reused on-site as backfilling materials, although required treatment level / detail and the specific re-use mode are under development.</li> </ul> | Project Site Area /<br>During design and construction phase         | <p>I</p> <p>C – Completed in the first Quarter of 2023 for the land formation works</p> <p>C – Completed in the first Quarter of 2023 for the land formation works</p> <p>C – Completed in the second Quarter of 2024</p> <p>C – Completed in Apr 2026 (except western portion of T2C)</p> |
| 10.5.1.1 | 7.1       | -            | <p>The following good site practices should be performed during the construction activities include:</p> <ul style="list-style-type: none"> <li>▪ Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site;</li> <li>▪ Training of site personnel in proper waste management and chemical waste handling procedures;</li> <li>▪ Provision of sufficient waste disposal points and regular collection for disposal;</li> <li>▪ Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks by tarpaulin/ similar material or by transporting wastes in enclosed containers. The cover should be extended over the edges of the sides and tailboards;</li> <li>▪ Stockpiles of C&amp;D materials should be kept wet or covered by impervious sheets to avoid wind-blown dust;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Project Site Area /<br>Construction Phase                           | I                                                                                                                                                                                                                                                                                          |

| EIA Ref. | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^ |
|----------|-----------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------------------|
|          |           |              | <ul style="list-style-type: none"> <li>All dusty materials including C&amp;D materials should be sprayed with water immediately prior to any loading transfer operation so as to keep the dusty material wet during material handling at the barging points/ stockpile areas;</li> <li>C&amp;D materials to be delivered to and from the project site by barges or by trucks should be kept wet or covered to avoid wind-blown dust;</li> <li>The speed of the trucks including dump trucks carrying C&amp;D or waste materials within the site should be controlled to about 10 km/hour in order to reduce the adverse dust impact and secure the safe movement around the site; and</li> <li>To avoid or minimise dust emission during transport of C&amp;D or waste materials within the site, each and every main temporary access should be paved with concrete, bituminous hardcore materials or metal plates and kept clear of dusty materials. Unpaved parts of the road should be sprayed with water or a dust suppression chemical so as to keep the entire road surface wet.</li> </ul>                                   |                                                                     |                                   |
| 10.5.1.3 | 7.1       | -            | <p>The following practices should be performed to achieve waste reduction include:</p> <ul style="list-style-type: none"> <li>Use of steel or aluminium formworks and falseworks for temporary works as far as practicable;</li> <li>Adoption of repetitive design to allow reuse of formworks as far as practicable;</li> <li>Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal;</li> <li>Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general refuse generated by the work force;</li> <li>Any unused chemicals or those with remaining functional capacity should be collected for reused as far as practicable;</li> <li>Proper storage and site practices to minimise the potential for damage or contamination of construction materials; and</li> <li>Plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste.</li> </ul> | Project Site Area / Construction Phase                              | I                                 |
| 10.5.1.5 | 7.1       |              | Inert and non-inert C&D materials should be handled and stored separately to avoid mixing the two types of materials.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Project Site Area / Construction Phase                              | I                                 |
| 10.5.1.5 | 7.1       | -            | Any recyclable materials should be segregated from the non-inert C&D materials for collection by reputable licensed recyclers whereas the non-recyclable waste materials should be disposed of at the designated landfill site by a reputable licensed waste collector.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Project Site Area / Construction Phase                              | I                                 |
| 10.5.1.6 | 7.1       | -            | A trip-ticket system promulgated shall be developed in order to monitor the off-site delivery of surplus inert C&D materials that could not be reused on-site for the proposed land formation work at the PFRF and to control fly tipping.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Project Site Area / Construction Phase                              | I                                 |
| 10.5.1.6 | 7.1       | 2.32         | The Contractor should prepare and implement a Waste Management Plan detailing various waste arising and waste management practices.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Construction Phase                                                  | I                                 |

| EIA Ref.  | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^                                                                            |
|-----------|-----------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| 10.5.1.16 | 7.1       | -            | <p>The following mitigation measures are recommended during excavation and treatment of the sediments:</p> <ul style="list-style-type: none"> <li>On-site remediation should be carried out in an enclosed area in order to minimise odour/dust emissions;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Project Site Area / Construction Phase                              | C – Completed in Apr 2026 (except western portion of T2C)                                                    |
|           |           |              | <ul style="list-style-type: none"> <li>The loading, unloading, handling, transfer or storage of treated and untreated sediment should be carried out in such a manner to prevent or minimise dust emissions;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                     | C – Completed in Apr 2026 (except western portion of T2C)                                                    |
|           |           |              | <ul style="list-style-type: none"> <li>All practical measures, including but not limited to speed control for vehicles, should be taken to minimise dust emission;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                     | C – Completed in Apr 2026 (except western portion of T2C)                                                    |
|           |           |              | <ul style="list-style-type: none"> <li>Good housekeeping should be maintained at all times at the sediment treatment facility and storage area;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                     | C – Completed in Apr 2026 (except western portion of T2C)                                                    |
|           |           |              | <ul style="list-style-type: none"> <li>Treated and untreated sediment should be clearly separated and stored separately; and</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                     | C – Completed in Apr 2026 (except western portion of T2C)                                                    |
|           |           |              | <ul style="list-style-type: none"> <li>Surface runoff from the enclosed area should be properly collected and stored separately, and then properly treated to levels in compliance with the relevant effluent standards as required by the Water Pollution Control Ordinance before final discharge.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                     | C – Completed in Apr 2026 (except western portion of T2C)                                                    |
| 10.5.1.18 | 7.1       | -            | <p>The marine sediments to be removed from the cable field joint area would be disposed of at the designated disposal sites to be allocated by the MFC. The following mitigation measures should be strictly followed to minimise potential impacts on water quality during transportation of the sediments requiring Type 1 disposal:</p> <ul style="list-style-type: none"> <li>Bottom opening of barges shall be fitted with tight fitting seals to prevent leakage of material;</li> <li>Monitoring of the barge loading shall be conducted to ensure that loss of material does not take place during transportation. Transport barges or vessels shall be equipped with automatic self-monitoring devices as specified by EPD; and</li> <li>Barges or hopper barges shall not be filled to a level that would cause the overflow of materials or sediment laden water during loading or transportation.</li> </ul> | Project Site Area / Construction Phase                              | N/A – the field joint excavation works for the submarine cable diversion will no longer be conducted anymore |
| 10.5.1.19 | 7.1       | -            | <p>Contractor should register with the EPD as a chemical waste producer and to follow the relevant guidelines. The following measures should be implemented:</p> <ul style="list-style-type: none"> <li>Good quality containers compatible with the chemical wastes should be used;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Project Site Area / Construction Phase                              | I                                                                                                            |

| EIA Ref.                                       | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Location / Duration of measures<br>Timing of completion of measures                     | Mitigation Measures Implemented?^                                                                                 |
|------------------------------------------------|-----------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
|                                                |           |              | <ul style="list-style-type: none"> <li>Incompatible chemicals should be stored separately;</li> <li>Appropriate labels must be securely attached on each chemical waste container indicating the corresponding chemical characteristics of the chemical waste, such as explosive, flammable, oxidizing, irritant, toxic, harmful, corrosive, etc.; and</li> <li>The contractor will use a licensed collector to transport and dispose of the chemical wastes at the approved Chemical Waste Treatment Centre or other licensed recycling facilities, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.</li> </ul> |                                                                                         |                                                                                                                   |
| 10.5.1.20                                      | 7.1       | -            | General refuse should be stored in enclosed bins or compaction units separated from inert C&D material. A reputable waste collector should be employed by the contractor to remove general refuse from the site for disposal at designated landfill sites. An enclosed and covered area should be provided to reduce the occurrence of 'windblown' light material.                                                                                                                                                                                                                                                                           | Project Site Area / Construction Phase                                                  | I                                                                                                                 |
| 10.5.1.21                                      | 7.1       | -            | The construction contractors will be required to regularly check and clean any refuse trapped or accumulated along the newly constructed seawall. Such refuse will then be stored and disposed of together with the general refuse.                                                                                                                                                                                                                                                                                                                                                                                                          | Project Site Area / Construction Phase                                                  | I                                                                                                                 |
| <b>Land Contamination – Construction Phase</b> |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                         |                                                                                                                   |
| 11.10.1.2 to 11.10.1.3                         | 8.1       | 2.32         | <p>For areas inaccessible during site reconnaissance survey</p> <ul style="list-style-type: none"> <li>Further site reconnaissance would be conducted once the areas are accessible in order to identify any land contamination concern for the areas.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                            | Project Site Area inaccessible during site reconnaissance / Prior to Construction Phase | I                                                                                                                 |
|                                                |           |              | <ul style="list-style-type: none"> <li>Subject to further site reconnaissance findings, a supplementary Contamination Assessment Plan (CAP) for additional site investigation (SI) (if necessary) may be prepared and submitted to EPD for endorsement prior to the commencement of SI at these areas.</li> </ul>                                                                                                                                                                                                                                                                                                                            |                                                                                         | C – Completed in Jan 2018 (The site re-appraisal summary report for fire training facility was submitted to EPD.) |
|                                                |           |              | <ul style="list-style-type: none"> <li>After completion of SI, the Contamination Assessment Report (CAR) will be prepared and submitted to EPD for approval prior to start of the proposed construction works at the golf course, the underground and above-ground fuel storage tank areas, emergency power generation units, airside petrol filling station and fuel tank room.</li> </ul>                                                                                                                                                                                                                                                  |                                                                                         | C – Completed in Oct 2020 (except CAR for airside petrol filling station and fuel tank room)                      |
|                                                |           |              | <ul style="list-style-type: none"> <li>Should remediation be required, Remediation Action Plan (RAP) and Remediation Report (RR) will be prepared for EPD's approval prior to commencement of the proposed remediation and any construction works respectively.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                   |                                                                                         | N/A as no remediation was required.                                                                               |

| EIA Ref.                                           | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Location / Duration of measures<br>Timing of completion of measures                | Mitigation Measures Implemented?^      |
|----------------------------------------------------|-----------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------|
| 11.8.1.2                                           | 8.1       | -            | <p>If contaminated soil is identified, the following mitigation measures are for the excavation and transportation of contaminated materials (if any):</p> <ul style="list-style-type: none"> <li>▪ To minimize the incidents of construction workers coming in contact with any contaminated materials, bulk earth-moving excavation equipment should be employed;</li> <li>▪ Contact with contaminated materials can be minimised by wearing appropriate clothing and personal protective equipment such as gloves and masks (especially when working directly with contaminated material), provision of washing facilities and prohibition of smoking and eating on site;</li> <li>▪ Stockpiling of contaminated excavated materials on site should be avoided as far as possible;</li> <li>▪ The use of any contaminated soil for landscaping purpose should be avoided unless pre-treatment was carried out;</li> <li>▪ Vehicles containing any excavated materials should be suitably covered to reduce dust emissions and/or release of contaminated wastewater;</li> <li>▪ Truck bodies and tailgates should be sealed to prevent any discharge;</li> <li>▪ Only licensed waste haulers should be used to collect and transport contaminated material to treatment/disposal site and should be equipped with tracking system to avoid fly tipping;</li> <li>▪ Speed control for trucks carrying contaminated materials should be exercised. 8km/h is the recommended speed limit;</li> <li>▪ Strictly observe all relevant regulations in relation to waste handling, such as Waste Disposal Ordinance (Cap 354), Waste Disposal (Chemical Waste) (General) Regulation (Cap 354) and obtain all necessary permits where required; and</li> <li>▪ Maintain records of waste generation and disposal quantities and disposal arrangements.</li> </ul> | Project Site Area / Construction Phase                                             | N/A as no contaminated soil was found. |
| <b>Terrestrial Ecological – Construction Phase</b> |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                    |                                        |
| 12.10.1.1                                          | 9.2       | 2.14         | <p><b>Pre-construction Egretty Survey</b></p> <ul style="list-style-type: none"> <li>▪ Conduct ecological survey for Sha Chau egretty to update the latest boundary of the egretty.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Breeding season (April - July) prior to commencement of HDD drilling works at HKIA | C – Completed in Jan 2019              |
| 12.7.2.3 and 12.7.2.6                              | 9.1       | 2.30         | <p><b>Avoidance and Minimisation of Direct Impact to Egretty</b></p> <ul style="list-style-type: none"> <li>▪ The daylighting location will avoid direct encroachment to the Sheung Sha Chau egretty. The daylighting location and mooring of flat top barge, if required, will be kept away from the egretty;</li> <li>▪ In any event, controls such as demarcation of construction site boundary and confining the lighting within the site will be practised to minimise disturbance to off-site habitat at Sheung Sha Chau Island; and</li> <li>▪ The containment pit at the daylighting location shall be covered or camouflaged.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | During construction phase at Sheung Sha Chau Island                                | C – Completed in Jan 2019              |

| EIA Ref.                                                 | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                          | Location / Duration of measures<br>Timing of completion of measures                   | Mitigation Measures Implemented?^                                       |
|----------------------------------------------------------|-----------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| 12.7.2.5                                                 | 9.1       | 2.30         | <b>Preservation of Nesting Vegetation</b> <ul style="list-style-type: none"> <li>The proposed daylighting location and the arrangement of connecting pipeline will avoid the need of tree cutting, therefore the trees that are used by ardeids for nesting will be preserved.</li> </ul>                                                                                                  | During construction phase at Sheung Sha Chau Island                                   | C – Completed in Jan 2019                                               |
| 12.7.2.4 and 12.7.2.6                                    | 9.1       | 2.30         | <b>Timing the Pipe Connection Works outside Ardeid's Breeding Season</b> <ul style="list-style-type: none"> <li>All HDD and related construction works on Sheung Sha Chau Island will be scheduled outside the ardeids' breeding season (between April and July). No night-time construction work will be allowed on Sheung Sha Chau Island during all seasons.</li> </ul>                 | During construction phase at Sheung Sha Chau Island                                   | C – Completed in Jan 2019                                               |
| 12.10.1.1                                                | 9.3       | -            | <b>Ecological Monitoring</b> <ul style="list-style-type: none"> <li>During the HDD construction works period from August to March, ecological monitoring will be undertaken monthly at the HDD daylighting location on Sheung Sha Chau Island to identify and evaluate any impacts with appropriate actions taken as required to address and minimise any adverse impact found.</li> </ul> | at Sheung Sha Chau Island                                                             | C – Completed in Jan 2019                                               |
| <b>Marine Ecological Impact – Pre-construction Phase</b> |           |              |                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                       |                                                                         |
| 13.11.4.1                                                | 10.2.2    | -            | <ul style="list-style-type: none"> <li>Pre-construction phase Coral Dive Survey.</li> </ul>                                                                                                                                                                                                                                                                                                | HKIAAA artificial seawall                                                             | C – Completed in Jan 2016                                               |
| <b>Marine Ecological Impact – Construction Phase</b>     |           |              |                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                       |                                                                         |
| 13.11.1.3 to 13.11.1.6                                   | -         | -            | <b>Minimisation of Land Formation Area</b> <ul style="list-style-type: none"> <li>Minimise the overall size of the land formation needed for the additional facilities to minimise the overall loss of habitat for marine resources, especially the CWD population.</li> </ul>                                                                                                             | Land formation footprint / during detailed design phase to completion of construction | C – Completed in the first Quarter of 2023 for the land formation works |
| 13.11.1.7 to 13.11.1.10                                  | -         | 2.31         | <b>Use of Construction Methods with Minimal Risk/Disturbance</b> <ul style="list-style-type: none"> <li>Use of non-dredge method for the main land formation and ancillary works including the diversion of the aviation fuel pipeline to the AFRF;</li> </ul>                                                                                                                             | During construction phase at marine works area                                        | C – Completed in Jan 2019 for diversion of aviation fuel pipeline       |
|                                                          |           |              | <ul style="list-style-type: none"> <li>Use of Deep Cement Mixing (DCM) method instead of conventional seabed dredging for the land formation works to reduce the risk of negative impacts through the elevation of suspended solids and contaminants on CWDs, fisheries and the marine environment;</li> </ul>                                                                             |                                                                                       | C – Completed in Apr 2022                                               |
|                                                          |           |              | <ul style="list-style-type: none"> <li>Use of bored piling in short duration to form the new approach lights and marker beacons for the new runway;</li> </ul>                                                                                                                                                                                                                             |                                                                                       | C – Completed in Oct 2021 for new approach lights                       |
|                                                          |           |              | <ul style="list-style-type: none"> <li>Avoid bored piling during CWD peak calving season (Mar to Jun);</li> </ul>                                                                                                                                                                                                                                                                          |                                                                                       | N/A for marker beacons as HKIAAA Marker                                 |

| EIA Ref.               | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Location / Duration of measures<br>Timing of completion of measures | Mitigation Measures Implemented?^                                                                                                          |
|------------------------|-----------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
|                        |           |              | <ul style="list-style-type: none"> <li>Prohibition of underwater percussive piling; and</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                     | Beacons would be replaced by buoys                                                                                                         |
|                        |           |              | <ul style="list-style-type: none"> <li>Use of horizontal directional drilling (HDD) method and water jetting methods for placement of submarine cables and pipelines to minimise the disturbance to the CWDs and other marine ecological resources.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                     | N/A as no underwater piling works                                                                                                          |
| 13.11.2.1 to 13.11.2.7 | -         | -            | <b>Mitigation for Indirect Disturbance due to Deterioration of Water Quality</b> <ul style="list-style-type: none"> <li>Water quality mitigation measures during construction phases include consideration of alternative construction methods, deployment of silt curtain and good site practices;</li> <li>Alternative construction methods including use of non-dredge methods for ground improvement (e.g. Deep Cement Mixing (DCM), prefabricated vertical drains (PVD), sand compaction piles, steel cells, stone columns and vertical sand drains);</li> <li>Use of bored piling in short duration to form the new approach lights and marker beacons for the new runway; and</li> <li>Use of horizontal directional drilling (HDD) method and water jetting methods for placement of undersea cables and pipelines to minimise the disturbance to the CWDs and other marine ecological resources.</li> </ul> | All works area during the construction phase                        | I<br><br>C – Completed in Apr 2022<br><br>C – Completed in Oct 2021 for new approach lights<br><br>C – Completed in Jan 2019 for HDD works |
| 13.11.1.12             | -         | -            | <b>Strict Enforcement of No-Dumping Policy</b> <ul style="list-style-type: none"> <li>A policy prohibiting dumping of wastes, chemicals, oil, trash, plastic, or any other substance that would potentially be harmful to dolphins and/or their habitat in the work area;</li> <li>Mandatory educational programme of the no-dumping policy be made available to all construction site personnel for all project-related works;</li> <li>Fines for infractions should be implemented; and</li> <li>Unscheduled, on-site audits shall be implemented.</li> </ul>                                                                                                                                                                                                                                                                                                                                                      | All works area during the construction phase                        | I                                                                                                                                          |
| 13.11.1.13             | -         | -            | <b>Good Construction Site Practices</b> <ul style="list-style-type: none"> <li>Regular inspection of the integrity and effectiveness of all silt curtains and monitoring of effluents to ensure that any discharge meets effluent discharge guidelines;</li> <li>Keep the number of working or stationary vessels present on-site to the minimum anytime; and</li> <li>Unscheduled, on-site audits for all good site practice restrictions should be conducted, and fines or penalties sufficient to be an effective deterrent need to be levied against violators.</li> </ul>                                                                                                                                                                                                                                                                                                                                       | All works area during the construction phase                        | I                                                                                                                                          |



| EIA Ref.                 | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Location / Duration of measures<br>Timing of completion of measures        | Mitigation Measures Implemented?^                                          |
|--------------------------|-----------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|
| 13.11.5.4 to 13.11.5.13  | 10.3.1    | -            | <b>SkyPier High Speed Ferries' Speed Restrictions and Route Diversions</b> <ul style="list-style-type: none"> <li>SkyPier HSFs operating to / from Zhuhai and Macau would divert north of SCLKC Marine Park with a 15 knot speed limit to apply for the part-journeys that cross high CWD abundance grid squares as indicatively shown in <b>Drawing No. MCL/P132/EIA/13-023</b> of the EIA Report. Both the alignment of the northerly route and the portion of routings to be subject to the speed limit of 15 knots shall be finalised prior to commencement of construction based on the future review of up-to-date CWD abundance and EM&amp;A data and taking reference to changes in total SkyPier HSF numbers; and</li> <li>A maximum of 10 knots will be enforced through the designated SCLKC Marine Park area at all times.</li> </ul> | Area between the footprint and SCLKC Marine Park during construction phase | I                                                                          |
|                          |           |              | <b>Other mitigation measures</b> <ul style="list-style-type: none"> <li>The ET will audit various parameters including actual daily numbers of HSFs, compliance with the 15-knot speed limit in the speed control zone and diversion compliance for SkyPier HSFs operating to / from Zhuhai and Macau; and</li> <li>The effectiveness of the CWD mitigation measures after implementation of initial six month SkyPier HSF diversion and speed restriction will be reviewed.</li> </ul>                                                                                                                                                                                                                                                                                                                                                           | Area between the footprint and SCLKC Marine Park during construction phase | I<br><br>C – Completed in Sep 2016                                         |
| 13.11.5.14 to 13.11.5.18 | 10.3.1    | 2.31         | <b>Dolphin Exclusion Zone</b> <ul style="list-style-type: none"> <li>Establishment of a 24 hr Dolphin Exclusion Zone (DEZ) with a 250 m radius around the land formation works areas;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Marine waters around land formation works area during construction phase   | C – Completed in the first Quarter of 2023 for the land formation works    |
|                          |           |              | <ul style="list-style-type: none"> <li>A DEZ would also be implemented during ground improvement works (e.g. DCM), water jetting works for submarine cables diversion, open trench dredging at the field joint locations and seawall construction; and</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                            | C – Completed in Apr 2022                                                  |
|                          |           |              | <ul style="list-style-type: none"> <li>A DEZ would also be implemented during bored piling work but as a precautionary measure only.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                            | C – Completed in Oct 2021 for the bored piling work of New approach lights |
| 13.11.5.19               | 10.4      | 2.31         | <b>Acoustic Decoupling of Construction Equipment</b> <ul style="list-style-type: none"> <li>Air compressors and other noisy equipment that must be mounted on steel barges should be acoustically-decoupled to the greatest extent feasible, for instance by using rubber or air-filled tyres; and</li> <li>Specific acoustic decoupling measures shall be specified during the detailed design of the project for use during the land formation works.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                | Around coastal works area during construction phase                        | I                                                                          |
| 13.11.5.20               | 10.6.1    | 2.29         | <b>Spill Response Plan</b> <ul style="list-style-type: none"> <li>An oil and hazardous chemical spill response plan is proposed to be established during the construction phase as a precautionary measure so that appropriate actions to prevent or reduce risks to CWDs can be undertaken in the event of an accidental spillage.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Construction phase                                                         | I                                                                          |

| EIA Ref.                                     | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Location / Duration of measures<br>Timing of completion of measures                   | Mitigation Measures Implemented?^                                                                                                |
|----------------------------------------------|-----------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| 13.11.5.21 to 13.11.5.23                     | 10.6.1    | -            | <b>Construction Vessel Speed Limits and Skipper Training</b> <ul style="list-style-type: none"> <li>A speed limit of 10 knots should be strictly observed for construction vessels at areas with the highest CWD densities (as currently indicated by the 1x1km grid squares in Figure 6 of Appendix 13.2 of EIA report).</li> <li>Vessels traversing through the work areas should be required to use predefined and regular routes (which would presumably become known to resident dolphins) to reduce disturbance to cetaceans due to vessel movements. Specific marine routes shall be specified by the Contractor prior to construction commencing.</li> </ul> | All areas north and west of Lantau Island during construction phase                   | I                                                                                                                                |
| <b>Fisheries Impact – Construction Phase</b> |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                       |                                                                                                                                  |
| 14.9.1.2 to 14.9.1.5                         | -         |              | <b>Minimisation of Land Formation Area</b> <ul style="list-style-type: none"> <li>Minimise the overall size of the land formation needed for the additional facilities to minimise the overall loss of habitat for fisheries resources.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                   | Land formation footprint / during detailed design phase to completion of construction | C – Completed in the first Quarter of 2023 for the land formation works                                                          |
| 14.9.1.6                                     | -         | -            | <b>Use of Construction Methods with Minimal Risk/Disturbance</b> <ul style="list-style-type: none"> <li>Use of non-dredge method for the main land formation and ancillary works including the diversion of the aviation fuel pipeline to the AFRF;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                       | During construction phase at marine works area                                        | C – Completed in Jan 2019 for diversion of aviation fuel pipeline                                                                |
|                                              |           |              | <ul style="list-style-type: none"> <li>Use of Deep Cement Mixing (DCM) method instead of conventional seabed dredging for the land formation works to reduce the risk of negative impacts through the elevation of suspended solids and contaminants on fisheries and the marine environment;</li> </ul>                                                                                                                                                                                                                                                                                                                                                             |                                                                                       | C – Completed in Apr 2022                                                                                                        |
|                                              |           |              | <ul style="list-style-type: none"> <li>Use of bored piling in short duration to form the new approach lights and marker beacons for the new runway; and</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                       | C – Completed in Oct 2021 for new approach lights<br>N/A for marker beacons as HKIAAAA Marker Beacons would be replaced by buoys |
|                                              |           |              | <ul style="list-style-type: none"> <li>Use of horizontal directional drilling (HDD) method and water jetting methods for placement of undersea cables and pipelines to minimise the disturbance to fisheries resources.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                       | C – Completed in Jan 2019 for HDD works                                                                                          |
| 14.9.1.11                                    | -         |              | <b>Strict Enforcement of No-Dumping Policy</b> <ul style="list-style-type: none"> <li>A policy prohibiting dumping of wastes, chemicals, oil, trash, plastic, or any other substance that would potentially be harmful to dolphins and/or their habitat in the work area;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                 | All works area during the construction phase                                          | I                                                                                                                                |

| EIA Ref.                                                | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Location / Duration of measures<br>Timing of completion of measures              | Mitigation Measures Implemented?^                                                                                                                                                                                        |
|---------------------------------------------------------|-----------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                         |           |              | <ul style="list-style-type: none"> <li>Mandatory educational programme of the no-dumping policy be made available to all construction site personnel for all project-related works;</li> <li>Fines for infractions should be implemented; and</li> <li>Unscheduled, on-site audits shall be implemented.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                  |                                                                                                                                                                                                                          |
| 14.9.1.12                                               | -         |              | <b>Good Construction Site Practices</b> <ul style="list-style-type: none"> <li>Regular inspection of the integrity and effectiveness of all silt curtains and monitoring of effluents to ensure that any discharge meets effluent discharge guidelines;</li> <li>Keep the number of working or stationary vessels present on-site to the minimum anytime; and</li> <li>Unscheduled, on-site audits for all good site practice restrictions should be conducted, and fines or penalties sufficient to be an effective deterrent need to be levied against violators.</li> </ul>                                                                                                                                                                                                                                                                                                            | All works area during the construction phase                                     | I                                                                                                                                                                                                                        |
| 14.9.1.13 to 14.9.1.18                                  | -         |              | <b>Mitigation for Indirect Disturbance due to Deterioration of Water Quality</b> <ul style="list-style-type: none"> <li>Water quality mitigation measures during construction phases include consideration of alternative construction methods, deployment of silt curtain and good site practices;</li> <li>Alternative construction methods including use of non-dredge methods for ground improvement (e.g. Deep Cement Mixing (DCM), prefabricated vertical drains (PVD), sand compaction piles, steel cells, stone columns and vertical sand drains);</li> <li>Use of bored piling in short duration to form the new approach lights and marker beacons for the new runway; and</li> <li>Use of horizontal directional drilling (HDD) method and water jetting methods for placement of undersea cables and pipelines to minimise the disturbance to fisheries resources.</li> </ul> | All works area during the construction phase                                     | I<br><br>C – Completed in Apr 2022<br><br>C – Completed in Oct 2021 for new approach lights<br>N/A for marker beacons as HKIAAAA Marker Beacons would be replaced by buoys<br><br>C – Completed on Jan 2019 for HDD work |
| <b>Landscape and Visual Impact – Construction Phase</b> |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                  |                                                                                                                                                                                                                          |
| Table 15.6                                              | 12.3      | -            | <b>CM1</b> - The construction area and contractor's temporary works areas should be minimised to avoid impacts on adjacent landscape.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | All works areas for duration of works;<br>Upon handover and completion of works. | I                                                                                                                                                                                                                        |
| Table 15.6                                              | 12.3      | -            | <b>CM2</b> - Reduction of construction period to practical minimum.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | All works areas for duration of works;                                           | I                                                                                                                                                                                                                        |

| EIA Ref.   | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                                                                                                                                         | Location / Duration of measures<br>Timing of completion of measures                                                                                                    | Mitigation Measures Implemented?^ |
|------------|-----------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
|            |           |              |                                                                                                                                                                                                                                                                                                                                                                                                                                           | Upon handover and completion of works.                                                                                                                                 |                                   |
| Table 15.6 | 12.3      | -            | <b>CM3</b> - Phasing of the construction stage to reduce visual impacts during the construction phase.                                                                                                                                                                                                                                                                                                                                    | All works areas for duration of works;<br>Upon handover and completion of works.                                                                                       | I                                 |
| Table 15.6 | 12.3      | -            | <b>CM4</b> - Construction traffic (land and sea) including construction plants, construction vessels and barges should be kept to a practical minimum.                                                                                                                                                                                                                                                                                    | All works areas for duration of works;<br>Upon handover and completion of works.                                                                                       | I                                 |
| Table 15.6 | 12.3      | -            | <b>CM5</b> - Erection of decorative mesh screens or construction hoardings around works areas in visually unobtrusive colours.                                                                                                                                                                                                                                                                                                            | All works areas for duration of works;<br>Upon handover and completion of works. – may be disassembled in phases.                                                      | I                                 |
| Table 15.6 | 12.3      | -            | <b>CM6</b> - Avoidance of excessive height and bulk of site buildings and structures.                                                                                                                                                                                                                                                                                                                                                     | New passenger concourse, terminal 2 expansion and other proposed airport related buildings and structures under the project;<br>Upon handover and completion of works. | I                                 |
| Table 15.6 | 12.3      | -            | <b>CM7</b> - Control of night-time lighting by hooding all lights and through minimisation of night working periods.                                                                                                                                                                                                                                                                                                                      | All works areas for duration of works;<br>Upon handover and completion of works. – may be disassembled in phases.                                                      | I                                 |
| Table 15.6 | 12.3      | -            | <b>CM8</b> - All existing trees shall be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas. | All existing trees to be retained;<br>Upon handover and completion of works.                                                                                           | C – Completed in May 2026         |

| EIA Ref.                                                  | EM&A Ref. | EP Condition | Environmental Protection Measures                                                                                                                                                                                                                                                                                        | Location / Duration of measures<br>Timing of completion of measures                                                      | Mitigation Measures Implemented?^ |
|-----------------------------------------------------------|-----------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| Table 15.6                                                | 12.3      | -            | <b>CM9</b> - Trees unavoidably affected by the works shall be transplanted where practical. A detailed Tree Transplanting Specification shall be provided in the Contract Specification, if applicable. Sufficient time for necessary tree root and crown preparation periods shall be allowed in the project programme. | All existing trees to be affected by the works;<br>Upon handover and completion of works.                                | I                                 |
| Table 15.6                                                | 12.3      | -            | <b>CM10</b> - Land formation works shall be followed with advanced hydroseeding around taxiways and runways as soon as practical.                                                                                                                                                                                        | All affected existing grass areas around runways and verges/Duration of works;<br>Upon handover and completion of works. | C - Completed in Mar 2025         |
| <b>Cultural Heritage Impact – Construction Phase</b>      |           |              |                                                                                                                                                                                                                                                                                                                          |                                                                                                                          |                                   |
| Not applicable to the construction stage of this project. |           |              |                                                                                                                                                                                                                                                                                                                          |                                                                                                                          |                                   |
| <b>Health Impact – Aircraft Emissions</b>                 |           |              |                                                                                                                                                                                                                                                                                                                          |                                                                                                                          |                                   |
| Not applicable to the construction stage of this project. |           |              |                                                                                                                                                                                                                                                                                                                          |                                                                                                                          |                                   |
| <b>Health Impact – Aircraft Noise</b>                     |           |              |                                                                                                                                                                                                                                                                                                                          |                                                                                                                          |                                   |
| Not applicable to the construction stage of this project. |           |              |                                                                                                                                                                                                                                                                                                                          |                                                                                                                          |                                   |

Notes:

“ - ” For items denoted as “ - ” provided under the columns of EM&A Ref. or EP Condition, environmental protection measures should be referred to the relevant paragraph(s) / table(s) in the approved EIA Report.

“ I ” Implemented and on-going where applicable.

“ N/A ” Not applicable to the construction works implemented during the reporting month.

“ ^ ” Checked by ET through site inspection and record provided by the Contractor.

“ C ” Construction works completed.

# Appendix B.     Site Inspection Schedule

Jul-26

| Sunday | Monday                | Tuesday               | Wednesday             | Thursday              | Friday                | Saturday |
|--------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------|
|        |                       |                       | 1                     | 2<br>Site Inspection  | 3<br>Site Inspection  | 4        |
| 5      | 6<br>Site Inspection  | 7<br>Site Inspection  | 8<br>Site Inspection  | 9<br>Site Inspection  | 10<br>Site Inspection | 11       |
| 12     | 13<br>Site Inspection | 14<br>Site Inspection | 15<br>Site Inspection | 16<br>Site Inspection | 17<br>Site Inspection | 18       |
| 19     | 20<br>Site Inspection | 21<br>Site Inspection | 22<br>Site Inspection | 23<br>Site Inspection | 24<br>Site Inspection | 25       |
| 26     | 27<br>Site Inspection | 28<br>Site Inspection | 29<br>Site Inspection | 30<br>Site Inspection | 31<br>Site Inspection |          |
|        |                       | Notes:                |                       |                       |                       |          |

## Appendix C. Status of Environmental Permits and Licenses

|      | Description          | Permit/ Reference No. | Status                 |
|------|----------------------|-----------------------|------------------------|
| EIAO | Environmental Permit | EP-489/2014           | Approved on 7 Nov 2014 |

| Contract No. | Description                                  | Location            | Permit/ Reference No. | Status                                                                |
|--------------|----------------------------------------------|---------------------|-----------------------|-----------------------------------------------------------------------|
| 3206         | Notification of Construction Work under APCO | Works area of 3206  | 10013053              | Receipt acknowledged by EPD on 09 Jan 2025                            |
|              | Registration as Chemical Waste Producer      | Site office of 3206 | WPN 5213-951-Z4035-01 | Completion of Registration on 18 Nov 2016                             |
|              |                                              | Works area of 3206  | WPN 5213-951-Z4035-02 | Completion of Registration on 18 Nov 2016                             |
|              | Construction Noise Permit (General Works)    | Works Area of 3206  | GW-RS0085-26          | Valid from 31 Jan 2026 to 30 Jul 2026<br>(Superseded by GW-RS0845-26) |
|              |                                              |                     | GW-RS0845-26          | Valid from 31 Jul 2026 to 29 Jan 2027                                 |
|              | Bill Account for disposal                    | Works area of 3206  | A/C 7026398           | Approval granted from EPD on 16 Nov 2016                              |
| 3305         | Notification of Construction Work under APCO | Works area of 3305  | 460857                | Receipt acknowledged by EPD on 12 Oct 2020                            |
|              | Registration as Chemical Waste Producer      | Works area of 3305  | WPN 5213-951-A3024-01 | Completion of Registration on 13 Nov 2020                             |
|              | Bill Account for disposal                    | Works area of 3305  | A/C 7035360           | Approval granted from EPD on 9 Oct 2019                               |
| 3306         | Registration as Chemical Waste Producer      | Works area of 3306  | WPN 8335-951-C4434-01 | Completion of Registration on 1 Apr 2020                              |
|              | Bill Account for disposal                    | Works area of 3306  | A/C 7035868           | Approval granted from EPD on 27 Nov 2019                              |
| 3308         | Bill Account for disposal                    | Works area of 3308  | A/C 7038988           | Approval granted from EPD on 24 Nov 2020                              |
| 3310         | Notification of Construction Work under APCO | Works area of 3310  | 10025549              | Receipt acknowledged by EPD on 13 Jan 2026                            |



| Contract No. | Description                                  | Location           | Permit/ Reference No. | Status                                                                                     |
|--------------|----------------------------------------------|--------------------|-----------------------|--------------------------------------------------------------------------------------------|
|              | Registration as Chemical Waste Producer      | Works area of 3310 | WPN 5213-951-C4682-01 | Completion of Registration on 5 Jan 2024                                                   |
|              |                                              | Works area of 3310 | WPN 5213-951-C5170-01 | Completion of Registration on 25 Feb 2026                                                  |
|              | Discharge License under WPCO                 | Works area of 3310 | WT00039654-2021       | Valid from 31 Dec 2021 to 31 Dec 2026                                                      |
|              |                                              | Works area of 3310 | WT00048623-2026       | Valid from 8 Jun 2026 to 30 Jun 2031                                                       |
|              | Bill Account for disposal                    | Works area of 3310 | A/C 7042793           | Approval granted from EPD on 4 Jan 2022                                                    |
|              |                                              | Works area of 3310 | A/C 7057573           | Approval granted from EPD on 2 Feb 2026                                                    |
|              | Construction Noise Permit (General Works)    | Works area of 3310 | GW-RS0136-26          | Valid from 15 Feb 2026 to 14 Aug 2026                                                      |
|              |                                              | Works area of 3310 | GW-RS0466-26          | Valid from 26 Apr 2026 to 23 Oct 2026                                                      |
| 3404         | Bill Account for disposal                    | Works area of 3404 | A/C 7035158           | Approval granted from EPD on 12 Sep 2019                                                   |
| 3405         | Registration as Chemical Waste Producer      | Works area of 3405 | WPN 5218-951-C4431-01 | Completion of Registration on 12 Mar 2020<br><br>Revised license was issued on 14 Jul 2023 |
|              | Bill Account for disposal                    | Works area of 3405 | A/C 7036796           | Approval granted from EPD on 20 Mar 2020                                                   |
| 3408         | Notification of Construction Work under APCO | Works area of 3408 | 10025700              | Receipt acknowledged by EPD on 16 Jan 2026                                                 |
|              |                                              | 3408 CSA-CBP       | 10032183              | Receipt acknowledged by EPD on 9 July 2026                                                 |
|              | Specified Process Licence (Cement Works)     | 3408 CSA-CBP       | L-3-268(2)            | Valid from 12 Sep 2025 to 11 Sep 2027                                                      |
|              | Registration as Chemical Waste Producer      | Works area of 3408 | WPN 5218-951-B2621-01 | Completion of Registration on 16 Jul 2021                                                  |
|              | Discharge License under WPCO                 | Works area of 3408 | WT00038836-2021       | Valid from 3 Sep 2025 to 30 Sep 2026                                                       |
|              | Bill Account for disposal                    | Works area of 3408 | A/C 7039063           | Approval granted from EPD on 2 Dec 2020                                                    |
|              | Construction Noise Permit (General Works)    | Works area of 3408 | GW-RS0223-26          | Valid from 22 Mar 2026 to 21 Sep 2026                                                      |
|              | Construction Noise Permit (Special Case)     | Works area of 3408 | GW-RS0109-26          | Valid from 19 Feb 2026 to 18 Aug 2026                                                      |
| 3508         |                                              | Works area of 3508 | 10012716              | Receipt acknowledged by EPD on 30 Dec 2024                                                 |

| Contract No. | Description                                  | Location             | Permit/ Reference No. | Status                                                              |
|--------------|----------------------------------------------|----------------------|-----------------------|---------------------------------------------------------------------|
|              | Notification of Construction Work under APCO | Storage yard of 3508 | 10013131              | Receipt acknowledged by EPD on 13 Jan 2025                          |
|              | Registration as Chemical Waste Producer      | Works area of 3508   | WPN 5218-951-G2898-01 | Completion of Registration on 28 Sep 2020                           |
|              | Discharge License under WPCO                 | Works area of 3508   | WT00047613-2025       | Valid from 17 Dec 2025 to 31 Dec 2030                               |
|              | Bill Account for disposal                    | Works area of 3508   | 7038224               | Approval granted from EPD on 8 Sep 2020                             |
|              | Construction Noise Permit (General Works)    | Works area of 3508   | GW-RS0102-26          | Valid from 8 Feb 2026 to 7 Aug 2026                                 |
|              |                                              | Works area of 3508   | GW-RS0111-26          | Valid from 20 Feb 2026 to 19 Aug 2026                               |
|              |                                              | Works area of 3508   | GW-RS0113-26          | Valid from 22 Mar 2026 to 21 Sep 2026                               |
|              |                                              | Works area of 3508   | GW-RS0337-26          | Valid from 1 Apr 2026 to 30 Sep 2026                                |
|              |                                              | Works area of 3508   | GW-RS0725-26          | Valid from 18 Jun 2026 to 5 Dec 2026                                |
| 3601         | Notification of Construction Work under APCO | Works area of 3601   | 10028457              | Receipt acknowledged by EPD on 31 March 2026                        |
|              | Registration as Chemical Waste Producer      | Works area of 3601   | WPN 7119-951-C4421-01 | Completion of Registration on 15 Jun 2026                           |
|              | Bill Account for disposal                    | Works area of 3601   | A/C 7029991           | Approval granted from EPD on 1 Feb 2018                             |
|              | Construction Noise Permit (General Works)    | Works area of 3601   | GW-RS0642-26          | Valid from 3 Jun 2026 to 7 Jul 2026<br>(Superseded by GW-RS0406-26) |
|              |                                              | Works area of 3601   | GW-RS0406-26          | Valid from 8 Jul 2026 to 7 Nov 2026                                 |
| 3602         | Notification of Construction Work under APCO | Works area of 3602   | 421278                | Receipt acknowledged by EPD on 18 Sep 2017                          |
|              | Registration as Chemical Waste Producer      | Works area of 3602   | WPN 5296-951-N2673-01 | Completion of Registration on 9 Oct 2017                            |
|              |                                              | Site office of 3602  | WPN 5296-951-N2673-02 | Completion of Registration on 11 Dec 2017                           |
|              | Bill Account for disposal                    | Works area of 3602   | A/C 7028942           | Approval granted from EPD on 6 Oct 2017                             |
| 3603         | Notification of Construction Work under APCO | Site office of 3603  | 433604                | Receipt acknowledged by EPD on 16 May 2018                          |

| Contract No. | Description                                  | Location                              | Permit/ Reference No. | Status                                                                |
|--------------|----------------------------------------------|---------------------------------------|-----------------------|-----------------------------------------------------------------------|
|              | Registration as Chemical Waste Producer      | Site office of 3603                   | WPN 5296-951-S4069-01 | Completion of Registration on 22 Jan 2018                             |
|              | Bill Account for disposal                    | Works area of 3603                    | A/C 7030002           | Approval granted from EPD on 1 Feb 2018                               |
| 3721         | Bill Account for disposal                    | Works area of 3721                    | A/C 7035234           | Approval granted from EPD on 25 Sep 2019                              |
| 3728         | Registration as Chemical Waste Producer      | Works area of 3728                    | WPN 5113-951-S4481-01 | Completion of Registration on 20 Oct 2023                             |
|              | Bill Account for disposal                    | Works area of 3728                    | A/C 7039409           | Approval granted from EPD on 22 Jan 2021                              |
| 3733         | Notification of Construction Work under APCO | Works area of 3733                    | 10028878              | Receipt acknowledged by EPD on 14 Apr 2026                            |
|              | Registration as Chemical Waste Producer      | Works area of 3733                    | WPN 5213-951-W3660-01 | Completion of Registration on 30 Dec 2021                             |
|              | Bill Account for disposal                    | Works area of 3733                    | 7041945               | Approval granted from EPD on 21 Oct 2021                              |
| 3802         | Notification of Construction Work under APCO | Works area of 3802                    | 10008525              | Receipt acknowledged by EPD on 27 Aug 2024                            |
|              | Registration as Chemical Waste Producer      | Works area of 3802                    | WPN 5218-951-G2895-01 | Completion of Registration on 28 Aug 2020                             |
|              |                                              | Works area of 3802 (Existing airport) | WPN 5218-951-G2945-01 | Completion of Registration on 29 Sep 2020                             |
|              | Discharge License under WPCO                 | Works area of 3802                    | WT00048705-2026       | Valid from 30 Jun 2026 to 31 May 2031                                 |
|              |                                              | Works area of 3802 (Existing airport) | WT00039092-2021       | Valid from 30 Nov 2021 to 30 Nov 2026                                 |
|              |                                              |                                       | WT00043143-2023       | Valid from 17 Mar 2023 to 31 Mar 2028                                 |
|              |                                              |                                       | WT00041807-2022       | Valid from 3 Oct 2022 to 31 Oct 2027                                  |
|              | Bill Account for disposal                    | Works area of 3802                    | A/C 7037575           | Approval granted from EPD on 15 Jun 2020                              |
|              | Construction Noise Permit (General Works)    | Works area of 3802                    | GW-RS0298-26          | Valid from 25 Mar 2026 to 24 Sep 2026                                 |
|              |                                              | Works area of 3802 (Existing airport) | GW-RS0137-26          | Valid from 17 Feb 2026 to 16 Aug 2026                                 |
|              |                                              |                                       | GW-RS0053-26          | Valid from 28 Jan 2026 to 27 Jul 2026<br>(Superseded by GW-RS0802-26) |

| Contract No. | Description                                                                                    | Location            | Permit/ Reference No. | Status                                                            |
|--------------|------------------------------------------------------------------------------------------------|---------------------|-----------------------|-------------------------------------------------------------------|
|              |                                                                                                |                     | GW-RS0802-26          | Valid from 28 Jul 2026 to 27 Jan 2026                             |
| 3805         | Notification of Construction Work under APCO                                                   | Works area of 3805  | 490065                | Receipt acknowledged by EPD on 2 Mar 2023                         |
|              |                                                                                                |                     | 10017209              | Receipt acknowledged by EPD on 14 May 2025                        |
|              |                                                                                                |                     | 10028285              | Receipt acknowledged by EPD on 27 Mar 2026                        |
|              |                                                                                                |                     | 10030468              | Receipt acknowledged by EPD on 26 May 2026                        |
|              | Construction Noise Permit (General Works)                                                      | Works area of 3805  | GW-RS0172-26          | Valid from 4 Mar 2026 to 3 Sep 2026                               |
|              | Registration as Chemical Waste Producer                                                        | Works area of 3805  | WPN 5218-951-C4788-01 | Completion of Registration on 31 Mar 2023                         |
|              | Bill Account for disposal                                                                      | Works area of 3805  | A/C 7046828           | Approval granted from EPD on 10 Mar 2023                          |
| 3901A        | Air Pollution Control (Furnaces, Ovens and Chimneys) (Installation and Alteration) Regulations | Works area of 3901A | EP/RS/0000443053      | Approval granted on 11 Dec 2020                                   |
|              | Specified Process license under APCO                                                           | Works area of 3901A | L-3-261(2)            | Valid from 20 Dec 2024 to 19 Dec 2026                             |
|              | Registration as Chemical Waste Producer                                                        | Works area of 3901A | WPN 5218-951-K3400-01 | Completion of Registration on 17 Jul 2020                         |
|              | Bill Account for disposal                                                                      | Works area of 3901A | A/C 7037889           | Approval granted on 20 Jul 2020                                   |
|              | Construction Noise Permit (General Works)                                                      | Works area of 3901A | GW-RS0078-26          | Valid from 5 Feb 2026 to 4 Aug 2026                               |
| 3901B        | Notification of Construction Work under APCO                                                   | Works area of 3901B | 10029726              | Receipt acknowledged by EPD on 6 May 2026                         |
|              | Registration as Chemical Waste Producer                                                        | Works area of 3901B | WPN 5218-951-G2880-01 | Completion of Registration on 17 Jan 2020                         |
|              | Bill Account for disposal                                                                      | Works area of 3901B | A/C 7032417           | Approval granted from EPD on 13 Nov 2018                          |
| 3913         | Specified Process license under APCO                                                           | Works area of 3913  | L-15-040(2)           | Valid from 19 Feb 2025 to 18 Feb 2027                             |
|              | Registration as Chemical Waste Producer                                                        | Works area of 3913  | WPN 5213-951-S4405-01 | Completion of Registration on 22 Jul 2022, updated on 29 Mar 2023 |

| Contract No. | Description                                   | Location                   | Permit/ Reference No. | Status                                    |
|--------------|-----------------------------------------------|----------------------------|-----------------------|-------------------------------------------|
|              | Bill Account for disposal                     | Works area of 3913         | A/C 7044632           | Approval granted from EPD on 18 Aug 2022  |
|              | Construction Noise Permit (General Works)     | Works area of 3913         | GW-RS0274-26          | Valid from 21 Mar 2026 to 19 Sep 2026     |
| 132 kV Cable | Bill Account for disposal                     | Works area of 132 kV Cable | A/C 7039280           | Approval granted from EPD on 8 Jan 2021   |
| C24W08       | Billing Account for disposal                  | Works area of C24W08       | A/C 7055562           | Approval granted from EPD on 12 Aug 2025  |
|              | Notification of Construction Works under APCO | Works area of C24W08       | 10020078              | Receipt acknowledged by EPD on 4 Aug 2025 |
|              | Registration as Chemical Waste Producer       | Works area of C24W08       | WPN 5213-951-P3620-01 | Completion of Registration on 25 Aug 2025 |
|              | Discharge License under WPCO                  | Works area of C24W08       | WT00048440-2026       | Valid from 12 Jun 2026 to 30 Jun 2031     |
|              | Construction Noise Permit (General Works)     | Works area of C24W08       | GW-RS0491-26          | Valid from 5 May 2026 to 4 Aug 2026       |

## Appendix D. Cumulative Statistics on Exceedances, Environmental Complaints, Notification of Summons and Status of Prosecutions

### Statistics for Exceedances for 1-hour TSP, Noise, Water, Waste, CWD Monitoring

|          |        | Total no. recorded in the reporting period | Total no. recorded since the project commenced |
|----------|--------|--------------------------------------------|------------------------------------------------|
| 1-hr TSP | Action | Nil <sup>(2)</sup>                         | 0                                              |
|          | Limit  | Nil <sup>(2)</sup>                         | 0                                              |
| Noise    | Action | Nil <sup>(2)</sup>                         | 0                                              |
|          | Limit  | Nil <sup>(2)</sup>                         | 0                                              |
| Water    | Action | Nil <sup>(4)</sup>                         | 0                                              |
|          | Limit  | Nil <sup>(4)</sup>                         | 0                                              |
| Waste    | Action | 0                                          | 1                                              |
|          | Limit  | 0                                          | 0                                              |
| CWD      | Action | Nil <sup>(5)</sup>                         | 0                                              |
|          | Limit  | Nil <sup>(5)</sup>                         | 0                                              |

Remarks:

- (1) Exceedances, which are not project related, are not shown in this table.
- (2) Following the commissioning of the Terminal 2 Expansion (T2E) on 27 May 2026, the extent of the remaining construction activities at the site were substantially reduced. The construction phase air quality and noise impact monitoring were terminated after 30 June 2026. No air quality and noise impact monitoring were undertaken during the reporting period.
- (3) With the completion of land formation works including seawall construction and all marine filling works in the first quarter of 2023, the construction phase water quality impact monitoring was terminated after 31 October 2023. No water quality impact monitoring was undertaken during the reporting period.
- (4) Construction phase CWD monitoring by small vessel line-transect survey supplemented by land-based theodolite tracking survey and passive acoustic monitoring was completed in December 2023. No CWD impact monitoring was undertaken during the reporting period.

### Statistics for Complaints, Notifications of Summons and Prosecutions

| Reporting Period                                     | Cumulative Statistics |                          |              |
|------------------------------------------------------|-----------------------|--------------------------|--------------|
|                                                      | Complaints            | Notifications of Summons | Prosecutions |
| This reporting period                                | 0                     | 0                        | 0            |
| From 28 December 2015 to end of the reporting period | 85                    | 2                        | 2            |

## **Appendix E. Data of SkyPier HSF Movements to/from Macau (between 1 to 31 July 2026)**

### **Data of SkyPier HSF Movements to/from Macau (between 1 and 31 July 2026)**

| Date   | Time [Arrival at / Departure from HKIA SkyPier] | Ferry No. | Connecting Port [YFT – Macao (Taipa)/ XZM – Macao (Maritime Ferry Terminal)] | Travel Direction [Arrival at / Departure from HKIA SkyPier] | Average Speed within Speed Control Zone (knots) | Extent of Instantaneous Speeding by SkyPier HSFs across SCZ (knots) | Duration of the Instantaneous Speeding (min) |
|--------|-------------------------------------------------|-----------|------------------------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------|---------------------------------------------------------------------|----------------------------------------------|
| 21-JUL | 16:07                                           | 3A161     | YFT                                                                          | Departure                                                   | 11.8                                            | -                                                                   | -                                            |
| 25-JUL | 14:12                                           | 3A061     | YFT                                                                          | Arrival                                                     | 12.7                                            | -                                                                   | -                                            |

#### Follow-up on instantaneous speeding

Referring to the data of SkyPier HSF movements in Jul 2026, no instantaneous speeding (i.e. a sudden change in speed at over 15 knots for a short period of time) within the SCZ was recorded.



