

Expansion of Hong Kong International Airport into a Three-Runway System

Construction Phase Quarterly EM&A Report No.16 (1 October to 31 December 2019)

February 2020

Mott MacDonald 3/F International Trade Tower 348 Kwun Tong Road Kowloon Hong Kong

T +852 2828 5757 F +852 2827 1823 mottmac.hk

Expansion of Hong Kong International Airport into a Three-Runway System

Construction Phase Quarterly EM&A Report No.16 (1 October to 31 December 2019)

February 2020

This Construction Phase Quarterly EM&A Report No. 16 has been reviewed and certified by

the Environmental Team Leader (ETL) in accordance with

Section 15.4 of the Updated EM&A Manual

Certified by:

Terence Kong

Environmental Team Leader (ETL) Mott MacDonald Hong Kong Limited

Date 28 February 2020



AECOM

8/F, Grand Central Plaza, Tower 2, 138 Shatin Rural Committee Road, Shatin, Hong Kong 香港新界沙田鄉事會路 138 號新城 市中央廣場第 2 座 8 樓 www.aecom.com +852 3922 9000 tel +852 2317 7609 fax

Our Ref: 60440482/C/JCHL200228

By Email

Airport Authority Hong Kong HKIA Tower, 1 Sky Plaza Road Hong Kong International Airport Lantau, Hong Kong

Attn: Mr. Lawrence Tsui, Principal Manager

28 February 2020

Dear Sir,

Contract No. 3102 3RS Independent Environmental Checker Consultancy Services

Quarterly EM&A Report No.16 (For 1 October 2019 to 31 December 2019)

Reference is made to the Environmental Team's submission of Quarterly EM&A Report No.16 (For 1 October 2019 to 31 December 2019) under section 15.4 of the Updated EM&A Manual certified by the ET Leader on 28 February 2020.

We would like to inform you that we have no adverse comment and verify the captioned submission.

Should you have any query, please feel free to contact the undersigned at 3922 9376.

Yours faithfully, AECOM Asia Co. Ltd.

Jackel Law

Independent Environmental Checker

c.c. Mott MacDonald - Terence Kong (ETL)

Contents

Abb	oreviat	ations		1
Exe	cutive	e Summary	;	3
1	Intro	roduction		6
	1.1	Background		6
	1.2	Scope of this Report		6
	1.3	Project Organisation		6
	1.4	Contact information for the Project		9
	1.5	Summary of Construction Works		9
	1.6	Summary of EM&A Programme Requirements		0
2	Envi	vironmental Monitoring and Auditing	1;	3
	2.1	Air Quality Monitoring	1	3
		2.1.1 Action and Limit Levels		3
		2.1.2 Summary of Monitoring Results		3
		2.1.3 Conclusion	1	4
	2.2	Noise Monitoring	1	4
		2.2.1 Action and Limit Levels	1	4
		2.2.2 Summary of Monitoring Results	1	4
		2.2.3 Conclusion	1	5
	2.3	Water Quality Monitoring	1	5
		2.3.1 Action and Limit Levels	1	6
		2.3.2 Summary of Monitoring Results	1	7
		2.3.3 Conclusion	1	9
	2.4	Waste Monitoring	1	9
		2.4.1 Action and Limit Levels	1	9
		2.4.2 Summary of Monitoring Results	2	0
	2.5	Chinese White Dolphin Monitoring	2	0
		2.5.1 Action and Limit Levels	2	1
		2.5.2 Summary of Monitoring Results	2	1
	2.6	Environmental Site Inspection		1
	2.7	Audit of SkyPier High Speed Ferries	3	2
	2.8	Audit of Construction and Associated Vessels	3	3
	2.9	Review of the Key Assumptions Adopted in the EIA Report	3	3
3		port on Non-compliance, Complaints, Notifications of Sur	nmons and	
	Pros	esecutions	3	5
	3.1	Compliance with Other Statutory Environmental Requirements	3	5
	3.2	Analysis and Interpretation of Complaints, Notification of Summor of Prosecutions	ns and Status	5

		3.2.1	Complaints	35
		3.2.2	Notifications of Summons or Status of Prosecution	35
	3.3	Cumula	ative Statistics	35
4	Con	clusion	and Recommendation	37
Tab	oles			
Table	1.1: (Contact Ir	nformation of Key Personnel	7
Table	1.2: (Contact Ir	nformation of the Project	9
Table	1.3: \$	Summary	of Status for All Environmental Aspects under the Updated EM&A	
Manu	ıal			10
Table	2.1: I	mpact Aiı	r Quality Monitoring Stations	13
Table	2.2: F	Percentag	ge of Air Quality Monitoring Results within Action and Limit Levels	13
Table	2.3: 0	General M	Meteorological Condition During Impact Air Quality Monitoring	13
Table	2.4: I	mpact No	pise Monitoring Stations	14
Table	2.5: F	Percentag	ge of Noise Monitoring Results within Action and Limit Levels	14
Table	2.6: 0	General M	Meteorological Condition During Impact Noise Monitoring	15
Table	2.7: N	Monitorin	g Locations and Parameters for Impact Water Quality Monitoring	15
Monit	oring		d Limit Levels for General Water Quality Monitoring and Regular DCM	16
			rol and Impact Stations during Flood Tide and Ebb Tide for General oring and Regular DCM Monitoring	17
Table	2.10:	Percenta	age of Water Quality Monitoring Results within Action and Limit Levels	18
		General	Weather Condition and Sea Condition During Impact Water Quality	
Monit	•			18
			y of SS Results Triggering Action or Limit Level (Mid-Ebb Tide)	18
			y of SS Results Triggering Action or Limit Level (Mid-Flood Tide)	19
			nd Limit Levels for Construction Waste	20
			ction Waste Statistics	20
			sed Theodolite Tracking Survey Station Details	21
I able Monit		Derived	Values of Action Level and Limit Level for Chinese White Dolphin	21
	•	Summar	y of Number of CWD Sightings and Number of Dolphins for the Same	
			Previous Quarter, and Current Reporting Period	22
Table	2.19:	Summar	y of Monthly and Running Quarterly STG and ANI of Chinese White	
Dolph	nin for	the Same	e Quarter Last Year, Previous Quarter, and Current Reporting Period	24
Table	2.20:	Summar	y of Photo Identification	28
		Summar	y of Survey Effort and CWD Group of Land-based Theodolite Tracking	
Surve	•			29
			for Valid Exceedances for the Environmental Monitoring	35
			for Non-compliance, Complaints, Notifications of Summons and	20
LIOSE	ecution	I		36

Figures

Figure 1.1	Locations of Key Construction Activities
Figure 2.1	Locations of Air and Noise Monitoring Stations and Chek Lap Kok Wind Station
Figure 2.2	Water Quality Monitoring Stations
Figure 2.3	Vessel based Dolphin Monitoring Transects in Construction, Post-Construction, and Operation Phases
Figure 2.4	Land based Dolphin Monitoring Locations in Baseline and Construction Phases
Figure 2.5	Sightings Distribution of Chinese White Dolphins
Figure 2.6	Sighting Locations of Chinese White Dolphins with Different Group Sizes
Figure 2.7	Sighting Locations of Chinese White Dolphins Engaged in Different Behaviours
Figure 2.8	Sighting Locations of Mother-calf Pairs
Figure 2.9	Plots of First Sightings of All CWD Groups from Land-based Stations
Figure 2.10	Location for Passive Acoustic Monitoring

Appendices

Appendix A	Project Organisation Chart
Appendix B	Environmental Mitigation Implementation Schedule (EMIS) for Construction Phase
Appendix C	Monitoring Results

ı

Abbreviations

3RS	Three-Runway System
AAHK	Airport Authority Hong Kong
AECOM	AECOM Asia Company Limited
AFCD	Agriculture, Fisheries and Conservation Department
AIS	Automatic Information System
ANI	Encounter Rate of Number of Dolphins
APM	Automated People Mover
AW	Airport West
BHS	Baggage Handling System
CAP	Contamination Assessment Plan
CAR	Contamination Assessment Report
CTP	Coral Translocation Plan
CWD	Chinese White Dolphin
DCM	Deep Cement Mixing
DEZ	Dolphin Exclusion Zone
DO	Dissolved Oxygen
EAR	Ecological Acoustic Recorder
EIA	Environmental Impact Assessment
EM&A	Environmental Monitoring & Audit
EMIS	Environmental Mitigation Implementation Schedule
EP	Environmental Permit
EPD	Environmental Protection Department
ET	Environmental Team
FCZ	Fish Culture Zone
HKBCF	Hong Kong-Zhuhai-Macao Bridge Hong Kong Boundary
	Crossing Facilities
HKIA	Hong Kong International Airport
HSF	High Speed Ferry
IEC	Independent Environmental Checker
LKC	Lung Kwu Chau
MTCC	Marine Traffic Control Centre
MMHK	Mott MacDonald Hong Kong Limited
MMWP	Marine Mammal Watching Plan
MSS	Maritime Surveillance System
MTRMP-CAV	Updated Marine Travel Routes and Management Plan for
	Construction and Associated Vessel
NEL	Northeast Lantau
NWL	Northwest Lantau
PAM	Passive Acoustic Monitoring
SC	Sha Chau
SCZ	Speed Control Zone
SCLKCMP	Sha Chau and Lung Kwu Chau Marine Park
SS	Suspended Solids
STG	Encounter Rate of Number of Dolphin Sightings
SWL	Southwest Lantau
	5 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1

The Manual	The Updated EM&A Manual
The Project	The Expansion of Hong Kong International Airport into a
	Three-Runway System
The SkyPier Plan	Marine Travel Routes and Management Plan for High Speed
	Ferries of SkyPier
TSP	Total Suspended Particulates
WL	West Lantau
WMP	Waste Management Plan

Executive Summary

The "Expansion of Hong Kong International Airport into a Three-Runway System" (the Project) serves to meet the future air traffic demands at Hong Kong International Airport (HKIA). On 7 November 2014, the Environmental Impact Assessment (EIA) Report (Register No.: AEIAR-185/2014) for the Project was approved and an Environmental Permit (EP) (Permit No.: EP-489/2014) was issued for the construction and operation of the Project.

Airport Authority Hong Kong (AAHK) commissioned Mott MacDonald Hong Kong Limited (MMHK) to undertake the role of Environmental Team (ET) for carrying out the Environmental Monitoring & Audit (EM&A) works during the construction phase of the Project in accordance with the Updated EM&A Manual (the Manual).

This is the 16th Construction Phase Quarterly EM&A Report for the Project which summarises the monitoring results and audit findings of the EM&A programme during the reporting period from 1 October 2019 to 31 December 2019.

Key Activities in the Reporting Period

The key activities of the Project carried out in the reporting period included reclamation works and land-side works. Reclamation works included deep cement mixing (DCM) works, marine filling, and seawall construction. Land-side works involved mainly foundation and substructure work for Terminal 2 expansion, modification and tunnel work for Automated People Mover (APM) and Baggage Handling System (BHS), and preparation work for utilities, with activities including site establishment, site office construction, road and drainage works, cable ducting, demolition, piling, and excavation works.

EM&A Activities Conducted in the Reporting Period

The EM&A programme was undertaken in accordance with the Manual of the Project. Summary of the monitoring activities during this reporting period is presented as below:

Monitoring Activities	Number of Sessions
1-hour Total Suspended Particulates (TSP) air quality monitoring	96
Noise monitoring	56
Water quality monitoring	40
Vessel line-transect surveys for Chinese White Dolphin (CWD) monitoring	6
Land-based theodolite tracking survey effort for CWD monitoring	9

Environmental auditing works, including weekly site inspections of construction works conducted by the ET and bi-weekly site inspections conducted by the Independent Environmental Checker (IEC), audit of SkyPier High Speed Ferries (HSF), audit of construction and associated vessels, and audit of implementation of Marine Mammal Watching Plan (MMWP) and Dolphin Exclusion Zone (DEZ) Plan, were conducted in the reporting period. Based on information including ET's observations, records of Maritime Surveillance System (MSS), and contractors' site records, it is noted that environmental pollution control and mitigation measures were properly implemented and construction activities of the Project in the reporting period did not introduce adverse impacts to the sensitive receivers.

Snapshots of Good Environmental Practices in the Reporting Period



Marine Traffic Control Centre for Monitoring Construction Vessels



Toolbox Training Conducted by Contractor



Sorting Facility on the Existing Airport Island

Key examples of good site practices implemented in the Project are highlighted here:

- Contractors' representatives were stationed in Marine Traffic Control Centre to ensure their construction vessels comply with the requirements of the Marine Travel Routes and Management Plan for Construction and Associated Vessels (MTRMP-CAV) including speed control and predefined routes.
- Regular Toolbox Trainings were conducted by contractors to enhance the understanding
 of their frontline staff on the regulatory requirements of environmental related issues and
 provide information on practical measures to minimise environmental impacts.
- 3. Sorting facilities were set up on the existing airport island to step up the reuse of excavated materials from 3RS and other AAHK's contracts.

Summary Findings of the EM&A Programme

The monitoring works for construction dust, construction noise, water quality, construction waste, landscape & visual, and CWD were conducted during the reporting period in accordance with the Manual.

Monitoring results of construction dust, construction noise, construction waste, and CWD monitoring did not trigger the corresponding Action and Limit Levels in the reporting period.

The water quality monitoring results for dissolved oxygen (DO), turbidity, total alkalinity, nickel and chromium obtained during the reporting period were within the corresponding Action and Limit Levels stipulated in the EM&A programme. Relevant investigation and follow-up actions will be conducted according to the EM&A programme if the corresponding Action and Limit Levels are triggered. For suspended solid (SS), some testing results triggered the relevant Action or Limit Level, and the corresponding investigations were conducted accordingly. The investigation findings concluded that the case was not related to the Project. To conclude, the construction activities in the reporting period did not introduce adverse impact to all water quality sensitive receivers.

The key findings of the EM&A programme during the reporting period is summarised as below:

	Yes	No	Details	Analysis / Recommendation / Remedial Actions
Breach of Limit Level^		√	No breach of Limit Level was recorded.	Nil
Breach of Action Level^		√	No breach of Action Level was recorded.	Nil
Complaints Received		√	No construction activities-related complaint was received	Nil
Notification of any summons and status of prosecutions		√	No notification of summons or prosecution were received.	Nil
Changes that affect the EM&A		V	There was no change to the construction works that may affect the EM&A.	Nil

Remarks:

[^]Only triggering of Action or Limit Level found related to Project works is counted as Breach of Action or Limit Level.

1 Introduction

1.1 Background

On 7 November 2014, the Environmental Impact Assessment (EIA) Report (Register No.: AEIAR-185/2014) for the "Expansion of Hong Kong International Airport into a Three-Runway System" (the Project) was approved and an Environmental Permit (EP) (Permit No.: EP-489/2014) was issued for the construction and operation of the Project.

Airport Authority Hong Kong (AAHK) commissioned Mott MacDonald Hong Kong Limited (MMHK) to undertake the role of Environmental Team (ET) for carrying out the Environmental Monitoring & Audit (EM&A) works during the construction phase of the Project in accordance with the Updated EM&A Manual (the Manual) submitted under EP Condition 3.1¹. AECOM Asia Company Limited (AECOM) was employed by AAHK as the Independent Environmental Checker (IEC) for the Project.

The Project covers the expansion of the existing airport into a three-runway system (3RS) with key project components comprising land formation of about 650 ha and all associated facilities and infrastructure including taxiways, aprons, aircraft stands, a passenger concourse, an expanded Terminal 2, all related airside and landside works and associated ancillary and supporting facilities. The submarine aviation fuel pipelines and submarine power cables also require diversion as part of the works.

Construction of the Project is to proceed in the general order of diversion of the submarine aviation fuel pipelines, diversion of the submarine power cables, land formation, and construction of infrastructure, followed by construction of superstructures.

The updated overall phasing programme of all construction works was presented in Appendix A of the Construction Phase Monthly EM&A Report No. 7 and the contract information was presented in Appendix A of the Construction Phase Monthly EM&A Report No. 46.

1.2 Scope of this Report

This is the 16th Construction Phase Quarterly EM&A Report for the Project which summarises the key findings of the EM&A programme during the reporting period from 1 October 2019 to 31 December 2019.

1.3 Project Organisation

The Project's organisation structure is provided in **Appendix A.** Contact details of the key personnel have been updated and provided in **Table 1.1**.

¹ The Manual is available on the Project's dedicated website (accessible at: http://env.threerunwaysystem.com/en/index.html)

Table 1.1: Contact Information of Key Personnel

Party	Position	Name	Telephone
Project Manager's Representative (Airport Authority Hong Kong)	Principal Manager, Environment	Lawrence Tsui	2183 2734
Environmental Team (ET) (Mott MacDonald Hong	Environmental Team Leader	Terence Kong	2828 5919
Kong Limited)	Deputy Environmental Team Leader	Heidi Yu	2828 5704
	Deputy Environmental Team Leader	Daniel Sum	2585 8495
Independent Environmental Checker (IEC)	Independent Environmental Checker	Jackel Law	3922 9376
(AECOM Asia Company Limited)	Deputy Independent Environmental Checker	Roy Man	3922 9141
Advanced Works:			
Party	Position	Name	Telephone
Contract P560(R) Aviation Fuel Pipeline Diversion Works (Langfang Huayuan	Project Manager	Wei Shih	2117 0566
Mechanical and Electrical Engineering Co., Ltd.)	Environmental Officer	Lyn Liu	5172 6543
Deep Cement Mixing	(DCM) Works:		
Party	Position	Name	Telephone
Contract 3205 DCM (Package 5) (Bachy Soletanche -	Deputy Project Director	Min Park	9683 0765
Sambo Joint Venture)	Environmental Officer	William Chan	5408 3045
Reclamation Works:			
Party	Position	Name	Telephone
Contract 3206 Main Reclamation Works	Project Manager	Kim Chuan Lim	3763 1509
(ZHEC-CCCC-CDC Joint Venture)	Environmental Officer	Kwai Fung Wong	3763 1452

Contract 3301 North Runway Crossover Taxiway (FJT-CHEC-ZHEC Joint Venture) Contract 3302 Eastern Vehicular Tunnel Advance Works (China Road and Bridge Corporation) Contract 3303 Third Runway and Associated Works (SAPR Joint Venture) Contract 3303 Third Runway Concourse and Integrated Airport Centres Works: Project Manager Andrew Keung 6277 6628 Runway and Associated Works (SAPR Joint Venture) Third Runway Concourse and Integrated Airport Centres Works: Party Position Name Telephone Contract 3402 New Integrated Airport Centres Works: Party Position Name 5374 3418 Contract 3501 Antenna Project Manager Wincent Kwan 9833 1313 Farm and Sewage Pumping Station (Build King Construction Lid.) Contract 3502 Terminal 2 Project Manager Vincent Kwan 9833 1313 Environmental Officer Edward Tam 9287 8270 Environmental Officer Chur Pong Chan 9187 7118 Lid.) Contract 3503 Terminal 2 Project Manager David Ng 9010 7871 Environmental Officer Chur Pong Chan 9187 7118 Lid.) Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Environmental Officer Malcolm Leung 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Environmental Officer Malcolm Leung 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing APM System Modification Works Farty Position Name Telephone Contract 3602 Existing APM System Modification Works Farty Position Name Telephone Contract 3602 Existing APM System Modification Works Farty Position Name Telephone	Airfield Works:			
Runway Crossover Taxiway (FJT-CHEC-ZHEC Joint Venture) Contract 3302 Eastern Vehicular Tunnel Advance Works (China Road and Bridge Corporation) Contract 3303 Third Runway and Associated Works (SAPR Joint Venture) Contract 3303 Third Runway Concourse and Integrated Airport Centres Works: Party Position Name Telephone Contract 3402 New Integrated Airport Centres Works: Party Position Name Telephone Contract 3501 Antenna Project Manager Vincent Kwan 9833 1313 Terminal 2 Expansion Works: Party Position Name Telephone Contract 3501 Antenna Project Manager Vincent Kwan 9833 1313 Terminal 2 Expansion Works: Party Position Name Telephone Contract 3501 Antenna Project Manager Vincent Kwan 9833 1313 Terminal 2 Expansion Works: Party Position Name Telephone Contract 3501 Antenna Project Manager Vincent Kwan 9833 1313 Environmental Officer Edward Tam 9287 8270 Lid.) Contract 3502 Terminal 2 Project Manager David Ng 9010 7871 App Depot Modification Works (Build King Construction Environmental Officer Chun Pong Chan 9187 7118 Environmental Officer Malcolm Leung 3973 1718 Foundation and Substructure Works (Leighton – Chun Wo Joint Venture) Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing Project Manager Kunihiro Tatecho 9755 0351 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing Project Manager Kunihiro Tatecho 9755 0351		Position	Name	Telephone
CFLT-CHEC-ZHEC Joint Venture Centract 3302 Eastern Vehicular Tunnel Advance Works Environmental Officer Dennis Ho 5645 0563	Runway Crossover	Deputy Project Director	Kin Hang Chung	9800 0048
Vehicular Tunnel Advance Works (China Road and Bridge Corporation) Contract 3303 Third Runway and Associated Works (SAPR Joint Venture) Third Runway Concourse and Integrated Airport Centres Works: Party Position Name Telephone Contract 3402 New Contract 3402 New Contract Manager Michael Kan 19206 0550 Integrated Airport Centres Environmental Officer Environmental Officer Lisa He 5374 3418 Telephone Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Lid.) Contract 3502 Terminal 2 Project Manager David Ng Da	(FJT-CHEC-ZHEC Joint	Environmental Officer	Joe Wong	6182 0351
(China Road and Bridge Corporation) Contract 3303 Third Runway and Associated Works (SAPR Joint Venture) Third Runway Concourse and Integrated Airport Centres Works: Party Position Name Telephone Contract 3402 New Integrated Airport Centres Works (Wing Hing Construction Co., Ltd.) Terminal 2 Expansion Works: Party Position Name Telephone Contract 3501 Antenna Project Manager Vincent Kwan 9833 1313 Terminal 2 Expansion Works: Party Position Name Telephone Contract 3502 Terminal 2 Project Manager Vincent Kwan 9833 1313 Environmental Officer Edward Tam 9287 8270 Ltd.) Contract 3502 Terminal 2 Project Manager David Ng 9010 7871 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3502 Existing Project Manager Environmental Officer Chun Pong Chan 9187 7118 Environmental Officer Malcolm Leung 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Kunway and Associated Works (Leighton — Chun Wo Joint Venture) Project Manager Fice Wu 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3502 Existing Project Manager Kunihiro Tatecho 9755 0351	Vehicular Tunnel Advance	Project Manager	Wan Cheung Lee	6100 6075
Rumway and Associated Works (SAPR Joint Venture) Environmental Officer Pan Fong 9436 9435 Third Runway Concourse and Integrated Airport Centres Works: Party Position Name Telephone Contract 3402 New Integrated Airport Centres Enabling Works (Wing Hing Construction Co., Ltd.) Terminal 2 Expansion Works: Party Position Name Telephone Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction (Build King Construction Works (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Froject Manager David Ng 9010 7871 Environmental Officer Chun Pong Chan 9187 7118 Environmental Officer Eric Wu 3973 1718 Environmental Officer Malcolm Leung 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing APM System Modification Works Finite Repair Runway 204 8435 Environmental Officer Pan Fong Michael Kan 9206 0550 Name Telephone Telephone Chun Pong Chan 9187 7118 Environmental Officer Malcolm Leung 9755 0351	(China Road and Bridge	Environmental Officer	Dennis Ho	5645 0563
(SAPR Joint Venture) Environmental Officer Pan Fong Past Search Position Name Telephone Contract 3402 New Integrated Airport Centres Enabling Works (Wing Hing Construction Co., Ltd.) Terminal 2 Expansion Works: Party Position Name Environmental Officer Lisa He S374 3418 Telephone Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Works (Build King Construction Ltd.) Contract 3502 Terminal 2 Project Manager David Ng Position Project Manager Project Manager David Ng Position Project Manager	Runway and Associated	Project Manager	Andrew Keung	6277 6628
Contract 3402 New Integrated Airport Centres Enabling Works (Wing Hing Construction Co., Ltd.) Terminal 2 Expansion Works: Party Position Name Telephone Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 Project Manager David Ng 9010 7871 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Construction Environmental Officer Chun Pong Chan 9187 7118 Ltd.) Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Foundation and Substructure Works (Leighton – Chun Wo Joint Environmental Officer Malcolm Leung 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3502 Existing APM System Modification Works Project Manager Kunihiro Tatecho 9755 0351		Environmental Officer	Pan Fong	9436 9435
Party Position Name Telephone Contract 3402 New Integrated Airport Centres Enabling Works (Wing Hing Construction Co., Ltd.) Terminal 2 Expansion Works: Party Position Name Telephone Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 Project Manager David Ng 9010 7871 Contract 3503 Terminal 2 Environmental Officer Chun Pong Chan 9187 7118 Contract 3503 Terminal 2 Construction Ltd.) Contract 3503 Terminal 2 Environmental Officer Chun Pong Chan 9187 7118 Contract 3503 Terminal 2 Environmental Officer Malcolm Leung 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing Project Manager Kunihiro Tatecho 9755 0351 APM System Modification Works Fourteemental Officer Kunihiro Tatecho 9755 0351				
Contract 3402 New Integrated Airport Centres Enabling Works (Wing Hing Construction Co., Ltd.) Terminal 2 Expansion Works: Party Position Name Telephone Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 Project Manager David Ng 9010 7871 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Foundation and Substructure Works (Leighton – Chun Wo Joint Venture) Automated People Mover (APM) Works: Party Position Name Telephone Kunihiro Tatecho 9755 0351 APM System Modification Works Environmental Officer Kunihiro Tatecho 9755 0351 Fourier and Sevage Project Manager Apm System Modification Works Environmental Officer Manager Kunihiro Tatecho 9755 0351	_		•	
Integrated Airport Centres Enabling Works (Wing Hing Construction Co., Ltd.) Terminal 2 Expansion Works: Party Position Name Telephone Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 Project Manager David Ng 9010 7871 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Project Manager David Ng 9010 7871 Environmental Officer Chun Pong Chan 9187 7118 Ltd.) Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Substructure Works (Leighton – Chun Wo Joint Venture) Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing Project Manager Kunihiro Tatecho 9755 0351 APM System Modification Works Environmental Officer Kunihiro Tatecho 9755 0351				· · · · · · · · · · · · · · · · · · ·
(Wing Hing Construction Co., Ltd.) Terminal 2 Expansion Works: Party Position Name Telephone Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 Project Manager David Ng 9010 7871 APM Depot Modification Works (Build King Construction Environmental Officer Chun Pong Chan 9187 7118 Ltd.) Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Contract 3503 Terminal 2 Environmental Officer Malcolm Leung 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing APM System Modification Works Fouriermental Officer Kunihiro Tatecho 9755 0351 Fouriermental Officer School System Modification Works Fouriermental Officer Kunihiro Tatecho 9755 0351	Integrated Airport Centres	Contract Manager	Michael Kan	9206 0550
Party Position Name Telephone Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 Project Manager David Ng 9010 7871 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Environmental Officer Chun Pong Chan 9187 7118 Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Contract 3503 Terminal 2 Environmental Officer Malcolm Leung 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing APM System Modification Works Finispersetal Officer Malcolm Contract Contr	(Wing Hing Construction	Environmental Officer	Lisa He	5374 3418
Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification Works (Build King Construction Ltd.) Environmental Officer Environmental Officer David Ng 9010 7871 Environmental Officer Chun Pong Chan 9187 7118 Environmental Officer Chun Pong Chan 9187 7118 Environmental Officer Chun Pong Chan 9187 7118 Environmental Officer Malcolm Leung 3973 1718 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing APM System Modification Works Finite protect Manager Vincent Kwan 9833 1313 Project Manager Vincent Kwan 9833 1313 Environmental Officer Edward Tam 9287 8270 Environmental Ng Finite protect Manager Vincent Kwan 9833 1313 Page 78 8270 Automated Ng 9010 7871 Environmental Officer Malcolm Leung 3973 1718 Telephone Contract 3602 Existing APM System Modification Works Finite protect of Officer Valenda Con Finite protect of Care Finite protect of Care Valenda Con Finite protect of Care Finite protect of Care Valenda Con Finite protect of Care Finite protect of Care Finite protect of Care Valenda Con Finite protect of Care Finite protect of Care Valenda Con Finite protect of Care Finite protect of Car	Co., Ltd.)			
Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification Works (Build King Construction Ltd.) Environmental Officer David Ng 9010 7871 Project Manager David Ng 9010 7871 Chun Pong Chan 9187 7118 Environmental Officer Chun Pong Chan 9187 7118 Contract 3503 Terminal 2 Foundation and Substructure Works (Leighton – Chun Wo Joint Venture) Construction Manager Environmental Officer Malcolm Leung 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing APM System Modification Works Environmental Officer Valenda Case Favironmental Officer Favironmental Officer Valenda Case Favironmental Officer Valenda Case Favironmental Officer Favironmental Officer Valenda Case Favironmental Officer Favironmental O	. ,	Works:		
(Build King Construction Ltd.) Contract 3502 Terminal 2 Project Manager David Ng 9010 7871 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Substructure Works (Leighton – Chun Wo Joint Venture) Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing APM System Modification Works Favigary Modification Manager Kunihiro Tatecho 9755 0351	Terminal 2 Expansion		Name	Telephone
APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Construction Manager Foundation and Substructure Works (Leighton – Chun Wo Joint Venture) Contract 3602 Existing APM System Modification Works Environmental Officer Chun Pong Chan 9187 7118 Eric Wu 3973 1718 Eric Wu 3973 1718 Environmental Officer Malcolm Leung 3973 0850 Telephone Telephone Fourtact 3602 Existing APM System Modification Works Environmental Officer Name Telephone Fourtact Officer Yelende Con 5200 2500	Terminal 2 Expansion Party Contract 3501 Antenna Farm and Sewage	Position		-
(Build King Construction Ltd.) Contract 3503 Terminal 2 Construction Manager Eric Wu 3973 1718 Foundation and Substructure Works (Leighton – Chun Wo Joint Venture) Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing APM System Modification Works Environmental Officer Kunihiro Tatecho 9755 0351	Terminal 2 Expansion Party Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction	Project Manager	Vincent Kwan	9833 1313
Foundation and Substructure Works (Leighton – Chun Wo Joint Venture) Environmental Officer Malcolm Leung 3973 0850 Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing APM System Modification Works Environmental Officer Malcolm Leung 3973 0850 Kunihiro Tatecho 9755 0351	Terminal 2 Expansion Party Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification	Project Manager Environmental Officer	Vincent Kwan Edward Tam	9833 1313 9287 8270
(Leighton – Chun Wo Joint Environmental Officer Malcolm Leung 3973 0850 Venture) Automated People Mover (APM) Works: Party Position Name Telephone Contract 3602 Existing APM System Modification Works Favironmental Officer Valenda Con 5200 2500	Terminal 2 Expansion Party Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification Works (Build King Construction	Project Manager Environmental Officer Project Manager	Vincent Kwan Edward Tam David Ng	9833 1313 9287 8270 9010 7871
Party Position Name Telephone Contract 3602 Existing APM System Modification Works Figure 2012 Officer Walands Co. 2012 15200 25200	Terminal 2 Expansion Party Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Foundation and	Position Project Manager Environmental Officer Project Manager Environmental Officer	Vincent Kwan Edward Tam David Ng Chun Pong Chan	9833 1313 9287 8270 9010 7871 9187 7118
Party Position Name Telephone Contract 3602 Existing APM System Modification Works Furing Manager Valenda Con Face Section 15200 2500	Terminal 2 Expansion Party Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Foundation and Substructure Works (Leighton – Chun Wo Joint	Project Manager Environmental Officer Project Manager Environmental Officer Construction Manager	Vincent Kwan Edward Tam David Ng Chun Pong Chan Eric Wu	9833 1313 9287 8270 9010 7871 9187 7118 3973 1718
Contract 3602 Existing Project Manager Kunihiro Tatecho 9755 0351 APM System Modification Works Fruitsparental Officer Valendo Con 5200 2500	Terminal 2 Expansion Party Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Foundation and Substructure Works (Leighton – Chun Wo Joint Venture)	Project Manager Environmental Officer Project Manager Environmental Officer Construction Manager Environmental Officer	Vincent Kwan Edward Tam David Ng Chun Pong Chan Eric Wu	9833 1313 9287 8270 9010 7871 9187 7118 3973 1718
APM System Modification Works Figure 1 Officer - Valenda Coa 5200 2500	Terminal 2 Expansion Party Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Foundation and Substructure Works (Leighton – Chun Wo Joint Venture)	Project Manager Environmental Officer Project Manager Environmental Officer Construction Manager Environmental Officer	Vincent Kwan Edward Tam David Ng Chun Pong Chan Eric Wu Malcolm Leung	9833 1313 9287 8270 9010 7871 9187 7118 3973 1718 3973 0850
Environmental Officer Valenda Coe E200 2500	Terminal 2 Expansion Party Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Foundation and Substructure Works (Leighton – Chun Wo Joint Venture)	Position Project Manager Environmental Officer Project Manager Environmental Officer Construction Manager Environmental Officer	Vincent Kwan Edward Tam David Ng Chun Pong Chan Eric Wu Malcolm Leung	9833 1313 9287 8270 9010 7871 9187 7118 3973 1718 3973 0850
	Terminal 2 Expansion Party Contract 3501 Antenna Farm and Sewage Pumping Station (Build King Construction Ltd.) Contract 3502 Terminal 2 APM Depot Modification Works (Build King Construction Ltd.) Contract 3503 Terminal 2 Foundation and Substructure Works (Leighton – Chun Wo Joint Venture) Automated People Mo Party Contract 3602 Existing APM System Modification	Position Project Manager Environmental Officer Project Manager Environmental Officer Construction Manager Environmental Officer	Vincent Kwan Edward Tam David Ng Chun Pong Chan Eric Wu Malcolm Leung	9833 1313 9287 8270 9010 7871 9187 7118 3973 1718 3973 0850 Telephone

Environmental Officer

Environmental Officer

Project Manager

Party	Position	Name	Telephone
Contract 3603 3RS Baggage Handling System	Project Manager	Andy Ng	9102 2739
(VISH Consortium)	Environmental Officer	Eric Ha	9215 3432
Airport Support Infr	astructure and Logistic	Works:	
Party	Position	Name	Telephone
Contract 3721	Site Agent	Thomas Lui	9011 5340

Gary Hong

Tony Wong

Fredrick Wong

6015 0795

9642 8672

9842 2703

1.4 Contact information for the Project

Infrastructure Works (China State Construction

Engineering (Hong Kong)

Contract 3801 APM and

BHS Tunnels on Existing

(China State Construction

Engineering (Hong Kong)

Airport Island

Ltd.)

The contact information for the Project is provided in **Table 1.2**. The public can contact us through the following channels if they have any queries and comments on the environmental monitoring data and project related information.

Table 1.2: Contact Information of the Project

Channels	Contact Information
Hotline	3908 0354
Email	env@3rsproject.com
Fax	3747 6050
Postal Address	Airport Authority Hong Kong
	HKIA Tower
	1 Sky Plaza Road
	Hong Kong International Airport
	Lantau
	Hong Kong
	Attn: Environmental Team Leader Mr Terence Kong
	c/o Mr Lawrence Tsui (TRD)

1.5 Summary of Construction Works

The key activities of the Project carried out in the reporting period included reclamation works and land-side works. Reclamation works included deep cement mixing (DCM) works, marine filling, and seawall construction. Land-side works involved mainly foundation and substructure work for Terminal 2 expansion, modification and tunnel work for Automated People Mover (APM) and Baggage Handling System (BHS), and preparation work for utilities, with activities include site establishment, site office construction, road and drainage works, cable ducting, demolition of existing facilities, piling, and excavation works.

The locations of the key construction activities are presented in **Figure 1.1**.

1.6 Summary of EM&A Programme Requirements

The status for all environmental aspects is presented in **Table 1.3**. The EM&A requirements remained unchanged during the reporting period.

Table 1.3: Summary of Status for All Environmental Aspects under the Updated EM&A Manual

Parameters	EM&A Requirements	Status
Air Quality		
Baseline Monitoring	At least 14 consecutive days before commencement of construction work	The baseline air quality monitoring result has been reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4.
Impact Monitoring	At least 3 times every 6 days	On-going
Noise		
Baseline Monitoring	Daily for a period of at least two weeks prior to the commencement of construction works	The baseline noise monitoring result has been reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4.
Impact Monitoring	Weekly	On-going
Water Quality		
General Baseline Water Quality Monitoring for reclamation, water jetting and field joint works	Three days per week, at mid-flood and mid-ebb tides, for at least four weeks prior to the commencement of marine works.	The baseline water quality monitoring result has been reported in Baseline Water Quality Monitoring Report and submitted to EPD under EP Condition 3.4.
General Impact Water Quality Monitoring for reclamation, water jetting and field joint works	Three days per week, at mid-flood and mid-ebb tides.	On-going
Initial Intensive Deep Cement Mixing (DCM) Water Quality Monitoring	At least four weeks	The Initial Intensive DCM Monitoring Report was submitted and approved by EPD in accordance with the Detailed Plan on DCM.
Regular DCM Water Quality Monitoring	Three times per week until completion of DCM works.	On-going
Waste Management		
Waste Monitoring	At least weekly	On-going
Land Contamination		
Supplementary Contamination Assessment Plan (CAP)	At least 3 months before commencement of any soil remediation works.	The Supplementary CAP was submitted and approved by EPD pursuant to EP condition 2.20.
Contamination Assessment Report (CAR)	CAR to be submitted for golf course	The CAR for Golf Course was submitted to EPD.
	CAR to be submitted for Terminal 2 Emergency Power Supply System No.1 (Volume 1)	The CAR for Terminal 2 Emergency Power Supply System No.1 (Volume 1) was submitted to EPD pursuant to EP Condition 1.9.
	Programme for submission of supplementary CAR at the other areas to be agreed.	On-going

Parameters	EM&A Requirements	Status
Terrestrial Ecology		
Pre-construction Egretry Survey Plan	Once per month in the breeding season between April and July, prior to the commencement of HDD drilling works.	The Egretry Survey Plan was submitted and approved by EPD under EP Condition 2.14.
Ecological Monitoring	Monthly monitoring during the HDD construction works period from August to March.	The terrestrial ecological monitoring at Sheung Sha Chau was completed in January 2019.
Marine Ecology		
Pre-Construction Phase Coral Dive Survey	Prior to marine construction works	The Coral Translocation Plan was submitted and approved by EPD under EP Condition 2.12.
Coral Translocation	-	The coral translocation was completed on 5 January 2017.
Post-translocation Monitoring	As per an enhanced monitoring programme based on the Coral Translocation Plan	The post-translocation monitoring programme according to the Coral Translocation Plan was completed in April 2018.
Chinese White Dolphins (C	CWD)	
Baseline Monitoring	6 months of baseline surveys before the commencement of land formation related construction works.	Baseline CWD results were reported in the CWD Baseline Monitoring Report and submitted to EPD in accordance with EP Condition 3.4.
	Vessel line transect surveys: Two full surveys per month; Land-based theodolite tracking surveys: Two days per month at the Sha Chau station and two days per month at the Lung Kwu Chau station; and Passive Acoustic Monitoring (PAM): For the whole duration of baseline period.	with EF Condition 3.4.
Impact Monitoring	Vessel line transect surveys: Two full surveys per month; Land-based theodolite tracking surveys: One day per month at the Sha Chau station and one day per month at the Lung Kwu Chau station; and PAM: For the whole duration for land formation related construction works.	On-going
Landscape and Visual		
Landscape and Visual Plan	At least 3 months before the commencement of construction works on the formed land of the Project.	The Landscape & Visual Plan was submitted to EPD under EP Condition 2.18
Baseline Monitoring	One-off survey within the Project site boundary prior to commencement of any construction works	The baseline landscape & visual monitoring result has been reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4.
Impact Monitoring	Weekly	On-going
Environmental Auditing		
Regular site inspection	Weekly	On-going
Marine Mammal Watching Plan (MMWP)	Monitor and check	On-going

Parameters	EM&A Requirements	Status	
implementation measures			
Dolphin Exclusion Zone (DEZ) Plan implementation measures	Monitor and check	On-going	
SkyPier High Speed Ferries (HSF) implementation measures	Monitor and check	On-going	
Construction and Associated Vessels implementation measures	Monitor and check	On-going	
Complaint Hotline and Email Channel	Construction phase	On-going	
Environmental Log Book	Construction phase	On-going	

Taking into account the construction works in the reporting period, impact monitoring of air quality, noise, water quality, waste management, landscape & visual, and CWD were carried out in the reporting period.

The EM&A programme also involved weekly site inspections and related auditing conducted by ET for the checking of implementation of required environmental mitigation measures recommended in the approved EIA Report. To promote the environmental awareness and enhance the environmental performance of the contractors, environmental trainings and regular environmental management meetings were conducted during the reporting period which are summarised as below:

- Ten skipper trainings provided by ET;
- Twenty-eight environmental management meetings for EM&A review with works contracts

The EM&A programme has been following the recommendations presented in the approved EIA Report and the Manual. A summary of implementation status of the environmental mitigation measures for the construction phase of the Project during the reporting period is provided in **Appendix B**.

2 Environmental Monitoring and Auditing

2.1 Air Quality Monitoring

Impact 1-hour Total Suspended Particulates (TSP) monitoring was conducted three times every six days at two representative monitoring stations during the reporting period. The locations of monitoring stations are described in **Table 2.1** and presented in **Figure 2.1**.

2.1.1 Action and Limit Levels

The Action and Limit Levels of the air quality monitoring stipulated in the EM&A programme for triggering the relevant investigation and follow-up procedures under the programme are provided in **Table 2.1** for reference.

Table 2.1: Impact Air Quality Monitoring Stations

Monitoring Station	Location	Action Level (μg/m³)	Limit Level (μg/m³)
AR1A	Man Tung Road Park	306	500
AR2	Village House at Tin Sum	298	

2.1.2 Summary of Monitoring Results

The air quality monitoring results in the reporting period are summarised in **Table 2.2** and the graphical plot is presented in **Appendix C**.

Table 2.2: Percentage of Air Quality Monitoring Results within Action and Limit Levels

	AR1A	AR2
Oct 2019	100%	100%
Nov 2019	100%	100%
Dec 2019	100%	100%
Overall	100%	100%

Note: The percentages are calculated by dividing the number of monitoring results within their corresponding Action and Limit Levels by the total number of monitoring results.

All monitoring results were within their corresponding Action and Limit Levels at all monitoring stations in the reporting period.

General meteorological conditions in the last month of the previous quarter and this reporting period were recorded and summarised in **Table 2.3**.

Table 2.3: General Meteorological Condition during Impact Air Quality Monitoring

	Weather	Dominant Wind Direction
Sep 2019	Sunny to Drizzle	Northwest
Oct 2019	Sunny to Cloudy	Southeast
Nov 2019	Sunny to Cloudy	Northwest
Dec 2019	Sunny to Cloudy	Northwest

2.1.3 Conclusion

No dust emission source from Project and other activities was observed at the monitoring stations during impact air quality monitoring. It is considered that the monitoring work in the reporting period was effective and there was no adverse impact attributable to the Project activities.

2.2 Noise Monitoring

Impact noise monitoring was conducted at four representative monitoring stations once per week during 0700 and 1900 in the reporting period. The locations of monitoring stations are described in **Table 2.4** and presented in **Figure 2.1**.

2.2.1 Action and Limit Levels

The Action and Limit Levels of the noise monitoring stipulated in the EM&A programme for triggering the relevant investigation and follow-up procedures under the programme are provided in **Table 2.4** for reference.

Table 2.4: Impact Noise Monitoring Stations

Monitoring Station	Location	Action Level	Limit Level
NM1A	Man Tung Road Park	When one	75 dB(A)
NM4	Ching Chung Hau Po Woon Primary School	documented	65dB(A) / 70 dB(A) (i)
NM5	Village House in Tin Sum	complaint is received from any one of the	75 dB(A)
NM6	House No. 1, Sha Lo Wan	sensitive receivers	75 dB(A)

Note:

2.2.2 Summary of Monitoring Results

The noise monitoring results in the reporting period are summarised in **Table 2.5** and the graphical plot is presented in **Appendix C**.

Table 2.5: Percentage of Noise Monitoring Results within Action and Limit Levels

	NM1A	NM4	NM5	NM6
Oct 2019	100%	100%	100%	100%
Nov 2019	100%	100%	100%	100%
Dec 2019	100%	100%	100%	100%
Overall	100%	100%	100%	100%

Note: The percentages are calculated by dividing the number of monitoring results within their corresponding Action and Limit Levels by the total number of monitoring results.

No complaints were received from any sensitive receiver that triggered the Action Level. All monitoring results were also within the corresponding Limit Levels at all monitoring stations in the reporting period.

General meteorological conditions in the last month of the previous quarter and this reporting period were recorded and summarised in **Table 2.6**.

⁽i) The Limit Level for NM4 is reduced to 70dB(A) for being an educational institution. During school examination period, the Limit Level is further reduced to 65dB(A).

Table 2.6: General Meteorological Condition during Impact Noise Monitoring

	Weather
Sep 2019	Sunny to Drizzle
Oct 2019	Sunny to Cloudy
Nov 2019	Sunny to Cloudy
Dec 2019	Sunny to Cloudy

2.2.3 Conclusion

As the construction activities were far away from the monitoring stations, major sources of noise dominating the monitoring stations observed during the monitoring sessions were traffic noise near NM1A, school activities at NM4, and aircraft noise near NM1A, NM5 and NM6. It is considered that the monitoring work in the reporting period was effective and there was no adverse impact attributable to the Project activities.

2.3 Water Quality Monitoring

During the reporting period, water quality monitoring was conducted three days per week, at midflood and mid-ebb tides, at a total of 23 water quality monitoring stations, comprising 12 impact (IM) stations, 8 sensitive receiver (SR) stations, and 3 control (C) stations in the vicinity of the water quality sensitive receivers around the existing airport island in accordance with the Manual. The purpose of water quality monitoring at the IM stations is to promptly capture any potential water quality impacts from the Project before the impacts could become apparent at sensitive receivers (represented by the SR stations). **Table 2.7** describes the details of the monitoring stations. **Figure 2.2** shows the locations of the monitoring stations.

Table 2.7: Monitoring Locations and Parameters for Impact Water Quality Monitoring

Monitoring	Description		Coordinates	Parameters
Station		Easting	Northing	
C1	Control Station	804247	815620	General Parameters
C2	Control Station	806945	825682	DO, pH,
C3 ⁽³⁾	Control Station	817803	822109	 Temperature, Salinity, Turbidity,
IM1	Impact Station	807132	817949	SS
IM2	Impact Station	806166	818163	DOM D
IM3	Impact Station	805594	818784	DCM Parameters Total Alkalinity,
IM4	Impact Station	804607	819725	Heavy Metals ⁽²⁾
IM5	Impact Station	804867	820735	_ · _ _
IM6	Impact Station	805828	821060	
IM7	Impact Station	806835	821349	
IM8	Impact Station	808140	821830	
IM9	Impact Station	808811	822094	
IM10	Impact Station	809794	822385	
IM11	Impact Station	811460	822057	
IM12	Impact Station	812046	821459	
SR1A ⁽¹⁾	Hong Kong-Zhuhai- Macao Bridge Hong Kong Boundary Crossing Facilities (HKBCF) Seawater Intake for cooling	812660	819977	General Parameters DO, pH, Temperature, Salinity, Turbidity, SS

Monitoring	Description		Coordinates		Parameters
Station		Easting		Northing	
SR2 ⁽³⁾	Planned marine park / hard corals at The Brothers / Tai Mo To	814166		821463	General Parameters DO, pH, Temperature, Salinity, Turbidity, SS
					DCM Parameters Total Alkalinity, Heavy Metals ⁽²⁾⁽⁴⁾
SR3	Sha Chau and Lung Kwu Chau Marine Park / fishing and spawning grounds in North Lantau	807571		822147	General Parameters DO, pH, Temperature, Salinity, Turbidity, SS
SR4A	Sha Lo Wan	807810		817189	
SR5A	San Tau Beach SSSI	810696		816593	
SR6A ⁽⁵⁾	Tai Ho Bay, Near Tai Ho Stream SSSI	814739		817963	
SR7	Ma Wan Fish Culture Zone (FCZ)	823742		823636	
SR8 ⁽⁶⁾	Seawater Intake for cooling at Hong Kong International Airport (East)	811623		820390	_

Notes:

- (1) With the operation of HKBCF, water quality monitoring at SR1A station was commenced on 25 October 2018.
- (2) Details of selection criteria for the two heavy metals for regular DCM monitoring refer to the Detailed Plan on Deep Cement Mixing available on the dedicated 3RS website (http://env.threerunwaysystem.com/en/epsubmissions.html). DCM specific water quality monitoring parameters (total alkalinity and heavy metals) were only conducted at C1 to C3, SR2, and IM1 to IM12.
- (3) According to the Baseline Water Quality Monitoring Report, C3 station is not adequately representative as a control station of impact/ SR stations during the flood tide. The control reference has been changed from C3 to SR2 from 1 September 2016 onwards.
- (4) Total alkalinity and heavy metals results are collected at SR2 as a control station for regular DCM monitoring.
- (5) As the access to SR6 was obstructed by the construction activities and temporary structures for Tung Chung New Town Extension, the monitoring location has been relocated to SR6A starting from 8 August 2019.
- (6) The monitoring location for SR8 is subject to further changes due to silt curtain arrangements and the progressive relocation of this seawater intake.

2.3.1 Action and Limit Levels

The Action and Limit Levels for general water quality monitoring and regular DCM monitoring stipulated in the EM&A programme for triggering the relevant investigation and follow-up procedures under the programme are presented in **Table 2.8**. The control and IM stations during flood tide and ebb tide for general water quality monitoring and regular DCM monitoring are presented in **Table 2.9**.

Table 2.8: Action and Limit Levels for General Water Quality Monitoring and Regular DCM Monitoring

Parameters	Action Level	Limit Level
Action and Limit Levels for ge (excluding SR1A & SR8)	neral water quality monitoring an	d regular DCM monitoring
DO in mg/L	Surface and Middle	Surface and Middle
(Surface, Middle & Bottom)	4.5 mg/L	4.1 mg/L
		5 mg/L for Fish Culture Zone (SR7) only

Parameters	Action Level		Limit Level			
	Bottom 3.4 mg/L		Bottom 2.7 mg/L			
SS in mg/L	23	or 120% of	37	or 130% of		
Turbidity in NTU	22.6	upstream control station	36.1	upstream control station at the same		
Total Alkalinity in ppm	95	at the same	99			
Representative Heavy Metals for regular DCM monitoring (Chromium)	0.2 tide of the same day, whichever is higher		0.2	tide of the same day, whichever is higher		
Representative Heavy Metals for regular DCM monitoring (Nickel)	3.2	_	3.6			
Action and Limit Levels SR1A						
SS (mg/l)	33		42			
Action and Limit Levels SR8						
SS (mg/l)	52		60			

Notes:

- 1. For DO measurement, Action or Limit Level is triggered when monitoring result is lower than the limits.
- 2. For parameters other than DO, Action or Limit Level of water quality results is triggered when monitoring results is higher than the limits.
- 3. Depth-averaged results are used unless specified otherwise.
- 4. Details of selection criteria for the two heavy metals for regular DCM monitoring refer to the Detailed Plan on Deep Cement Mixing available on the dedicated 3RS website http://env.threerunwaysystem.com/en/ep-submissions.html)
- 5. The Action and Limit Levels for the two representative heavy metals chosen will be the same as that for the intensive DCM monitoring.

Table 2.9: The Control and Impact Stations during Flood Tide and Ebb Tide for General Water Quality Monitoring and Regular DCM Monitoring

Impact Stations
IM1, IM2, IM3, IM4, IM5, IM6, IM7, IM8, SR3
IM7, IM8, IM9, IM10, IM11, IM12, SR1A, SR3, SR4A, SR5A, SR6, SR6A, SR8
SR4A, SR5A, SR6, SR6A
IM1, IM2, IM3, IM4, IM5, IM6, IM7, IM8, IM9, IM10, IM11, IM12, SR1A, SR2, SR3, SR7, SR8

Note:

2.3.2 Summary of Monitoring Results

The summary or results within their corresponding Action and Limit Levels in the reporting period are presented in **Table 2.10**. The weather and sea conditions in the last month of the previous quarter and this reporting period were recorded and summarised in **Table 2.11**.

As per findings of Baseline Water Quality Monitoring Report, the control reference has been changed from C3 to SR2 from 1 Sep 2016 onwards.

Table 2.10: Percentage of Water Quality Monitoring Results within Action and Limit Levels

	General	Water Quality	Regular DCM Monitoring				
	DO (Surface and Middle)	DO (Bottom)	SS	Turbidity	Alkalinity	Chromium	Nickel
Oct 2019	100%	100%	99.1%	100%	100%	100%	100%
Nov 2019	100%	100%	99.8%	100%	100%	100%	100%
Dec 2019	100%	100%	98.8%	100%	100%	100%	100%
Overall	100%	100%	99.2%	100%	100%	100%	100%

Note: The percentages are calculated by dividing the number of depth-averaged results complying with their corresponding Action and Limit Levels by the total number of depth-averaged results.

Table 2.11: General Weather Condition and Sea Condition during Impact Water Quality Monitoring

	Weather	Sea Condition
Sep 2019	Sunny to Cloudy	Calm to Rough
Oct 2019	Sunny to Cloudy	Calm to Rough
Nov 2019	Sunny to Cloudy	Calm to Rough
Dec 2019	Sunny to Rainy	Calm to Rough

The monitoring results for DO, turbidity, total alkalinity, nickel and chromium obtained in the reporting period were within their corresponding Action and Limit Levels stipulated in the EM&A programme. Relevant investigation and follow-up actions will be conducted according to the EM&A programme if the corresponding Action and Limit Levels are triggered. For SS, some of the testing results triggered the relevant Action or Limit Level in the reporting period, and investigations were conducted accordingly.

Summaries of results triggering Action or Limit Level for SS are presented in **Table 2.12** to **Table 2.13**.

Details of the investigation findings were presented in Construction Phase Monthly EM&A Report No. 46, 47 and 48, which concluded that all results triggering the Action or Limit Level were not related to the Project.

Table 2.12: Summary of SS Results Triggering Action or Limit Level (Mid-Ebb Tide)

	IM1	IM2	IM3	IM4	IM5	IM6	IM7	IM8	IM9	IM10	IM11	IM12	SR1A	SR2	SR3	SR4A	SR5A	SR6A	SR7	SR8
29/10/2019																				
16/11/2019																				
28/12/2019		D																		
No. of result triggering Action or Limit Level	0	1	0	0	0	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0

IM9 IM10 IM11 IM12 SR1A SR3 SR4A SR5A SR6A SR7 SR8 IM2 IM3 IM4 IM5 IM6 IM7 IM8 15/10/2019 29/10/2019 D D D 17/12/2019 D 28/12/2019 No. of result triggering 0 0 0 0 1 2 0 1 1 1 0 0 0 1 1 1 0 0 0 Action or Limit Level

Table 2.13: Summary of SS Results Triggering Action or Limit Level (Mid-Flood Tide)

Legend:	
	Result within corresponding Action and Limit Levels
	Result triggered the Action Level at monitoring station located upstream of the Project based on dominant tidal flow
D	Result triggered the Action Level at monitoring station located downstream of the Project based on dominant tidal flow
	Result triggered the Limit Level at monitoring station located upstream of the Project based on dominant tidal flow
	Upstream station with respect to the Project during the respective tide based on dominant tidal flow
	Downstream station with respect to the Project during the respective tide based on dominant tidal flow

2.3.3 Conclusion

In the reporting period, it is noted that most monitoring results were within their corresponding Action and Limit Levels, while only a minor number of results triggered their corresponding Action or Limit Level, and investigations were conducted accordingly. Based on the findings presented in Construction Phase Monthly EM&A Report No. 46, 47 and 48, all cases that triggered the corresponding Action or Limit Level were not related to the Project; hence, the Project did not introduce adverse impact to all water quality sensitive receivers. All required actions under the Event and Action Plan were followed.

Nevertheless, the non-project related triggers were attended to and initiated corresponding action and measures. As part of the EM&A programme, the construction methods and mitigation measures for water quality will continue to be monitored and opportunities for further enhancement will continue to be explored and implemented where possible, to strive for better protection of water quality and the marine environment.

In the meantime, the contractors were reminded to implement and maintain all mitigation measures during weekly site inspections and regular environmental management meetings. These include maintaining mitigation measures properly for reclamation works including DCM works, marine filling, and seawall construction as recommended in the Manual.

2.4 Waste Monitoring

In accordance with the Manual, waste generated from construction activities was audited once per week to determine if wastes were being managed in accordance with the Waste Management Plan (WMP) prepared for the Project, contract-specific WMP, and any statutory and contractual requirements. All aspects of waste management including waste generation, storage, transportation, and disposal were assessed during the audits.

2.4.1 Action and Limit Levels

The Action and Limit Levels of the construction waste are provided in **Table 2.14**.

Table 2.14: Action and Limit Levels for Construction Waste

Monitoring Stations	Action Level	Limit Level
Construction Area	When one valid documented complaint is received	Non-compliance of the WMP, contract-specific WMPs, any statutory and contractual requirements

2.4.2 Summary of Monitoring Results

Weekly monitoring of the Project construction works was carried out by the ET in the reporting period to check and monitor the implementation of proper waste management practices.

Recommendations made by the ET included provision and maintenance of proper chemical waste storage area, as well as handling, segregation, and regular disposal of general refuse. The contractors had taken actions to implement the recommended measures.

Based on updated contractors' information, summary of construction waste generated in the reporting period is presented in **Table 2.15**.

There were no complaints, non-compliance of the WMP, contract-specific WMPs, statutory and contractual requirements that triggered Action and Limit Levels in the reporting period.

Table 2.15: Construction Waste Statistics

	C&D ¹ Material Stockpiled for Reuse or Recycle (m³)	C&D Material Reused in the Project (m³)	C&D Material Reused in other Projects (m³)	C&D Material Transferred to Public Fill (m³)	Chemical Waste (kg)	Chemical Waste (L)	General Refuse (tonne)
Oct 2019 ^{2, 3}	1,948	*19,316	*0	3,600	0	3,000	796
Nov 2019 ²	1,403	26,774	0	3,380	90	6,600	680
Dec 2019 ²	835	30,475	0	3,027	70	7,000	779
Total	4,186	76,565	0	10,007	160	16,600	2,255

Notes

- 1. C&D refers to Construction and Demolition.
- 2. Paper, metals and/or plastics were recycled in the reporting period.
- 3. Updated figures in the past month are reported and marked with an asterisk (*). Updated figures for earlier months will be reported in the forthcoming Annual EM&A Report.

2.5 Chinese White Dolphin Monitoring

CWD monitoring was conducted by vessel line transect survey at a frequency of two full surveys per month, supplemented by land-based theodolite tracking survey and PAM. The frequency of the land-based theodolite tracking survey during the construction phase was one day per month at both Sha Chau (SC) and Lung Kwu Chau (LKC) stations as stipulated in the Manual. Since January 2019, additional theodolite tracking survey for one day at LKC station was conducted on a voluntary basis to collect supplementary information for the Project, such that a total of one tracking day at SC station and two tracking days at LKC station were conducted per month. The vessel survey transects followed the transect lines proposed in the Manual and are consistent with those used in the Agriculture, Fisheries and Conservation Department (AFCD) long-term CWD monitoring programme. The transect locations of CWD monitoring by vessel line transect survey conducted from October to December 2019 are shown in Figure 2.3, whilst the land-based theodolite tracking survey stations are described in Table 2.16 and depicted in Figure 2.4. The location of the PAM device is shown in Figure 2.10.

Table 2.16: Land-based Theodolite Tracking Survey Station Details

Stations	Location	Geographical Coordinates	Station Height (m)	Approximate Tracking Distance (km)
D	Sha Chau (SC)	22° 20′ 43.5″ N 113° 53′ 24.66″ E	45.66	2
Е	Lung Kwu Chau (LKC)	22° 22′ 44.83″ N 113° 53′ 0.2″ E	70.40	3

2.5.1 Action and Limit Levels

The Action Level and Limit Level for CWD monitoring were formulated by an action response approach using the running quarterly dolphin encounter rates (STG and ANI) derived from baseline monitoring data, as presented in the CWD Baseline Monitoring Report. The derived values of Action and Limit Levels for CWD monitoring are shown in **Table 2.17.**

Table 2.17: Derived Values of Action Level and Limit Level for Chinese White Dolphin Monitoring

	NEL, NWL, AW, WL and SWL as a Whole
Action Level	Running quarterly STG < 1.86 & ANI < 9.35
Limit Level	Two consecutive running quarterly (3-month) STG < 1.86 & ANI < 9.35

2.5.2 Summary of Monitoring Results

2.5.2.1 Vessel Line Transect Survey

Survey Effort

During the October to December 2019 reporting period, a total of six sets of vessel line transect survey covering all transects in Northeast Lantau (NEL), Northwest Lantau (NWL), Airport West (AW), West Lantau (WL) and Southwest Lantau (SWL) survey areas were conducted at a frequency of twice per month, in each survey area.

A total of around 1,362 km of survey effort was collected from these surveys, with around 96.9% of the total survey effort being conducted under favourable weather condition (i.e. Beaufort Sea State 3 or below with favourable visibility). Details of the survey effort data are presented in **Appendix C**.

CWD Sighting

From October to December 2019, there were a total of 38 sightings of CWDs, with 110 dolphins sighted (**Table 2.18**). Amongst these sightings, 37 sightings with 108 dolphins were recorded during on-effort searches under favourable weather condition.

When breaking down the sightings by survey areas, 10 sightings with 26 dolphins, 21 sightings with 71 dolphins and 7 sightings with 13 dolphins were recorded in NWL (including AW transects), WL and SWL survey areas respectively during the current reporting period. No CWD was sighted in NEL survey area.

Compared with the last quarter (i.e. July to September 2019), there is an overall decrease in terms of both number of CWD sightings and number of dolphins (decreased by around 45% and 61% respectively). WL and SWL both showed drastic decreases in terms of both number of CWD sightings and number of dolphins, and such decreases were most remarkable in SWL as the number of CWD sightings and number of dolphins decreased by around 72% and 87%

respectively. On the other hand, NWL experienced an observable increase in terms of both number of CWD sightings and number of dolphins by 200% and 375% respectively.

Compared with the same quarter of last year in 2018 (i.e. October to December 2018), there is an overall decrease in both number of CWD sightings and number of dolphins by 10% and 21% respectively. The decrease is mainly contributed by NWL and WL areas.

Table 2.18 below shows the comparison of the numbers of sightings and dolphins amongst the current reporting period, last quarter, and the same quarter of year 2018.

Table 2.18: Summary of Number of CWD Sightings and Number of Dolphins for the Same Quarter Last Year, Previous Quarter, and Current Reporting Period

	Same Quarter of Last Year	Previous Reporting Period	Current Reporting Period			
	October to December 2018	July to September 2019	October to December 2019			
NEL	1 (1)	0 (0)	0 (0)			
NWL	12 (35)	3 (4)	9 (19)			
AW	0 (0)	0 (0)	1 (7)			
WL	24 (89)	41 (182)	21 (71)			
SWL	5 (15)	25 (97)	7 (13)			
Total	42 (140)	69 (283)	38 (110)			

Note: Values in () represent number of dolphins

The distribution of CWD sightings recorded from October to December 2019 is illustrated in **Figure 2.5**. In NWL survey area including AW transects, CWD sightings were mostly recorded around Lung Kwu Chau and at the southwestern part of NWL survey area, around the waters between the 3RS works area and the coast of Northwest Lantau. In WL, CWD sightings distributed from the northernmost part of the survey area to the south off Fan Lau, with the majority recorded between Tai O and Peaked Hill. In SWL, CWD sightings distributed along the coast from Fan Lau to Lo Kei Wan. No CWD sightings were recorded in NEL survey area. Details of the sighting data are presented in **Appendix C**.

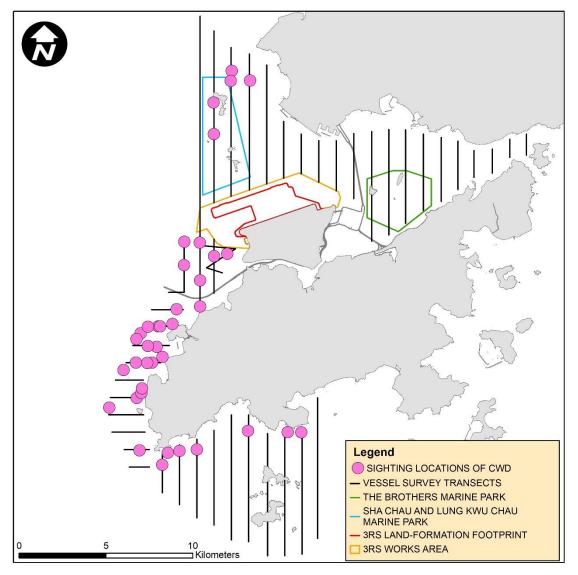


Figure 2.5: Sightings Distribution of Chinese White Dolphins from Oct to Dec 2019

Remarks: Please note that there are 38 pink circles on the map indicating the sighting locations of CWD. Some of them were very close to each other and therefore appear overlapped on this sighting distribution map.

Encounter Rate

The dolphin encounter rates for the number of on-effort dolphin sightings per 100 km survey effort (STG) and for the total on-effort number of dolphins per 100 km survey effort (ANI) in the whole survey area (i.e. NEL, NWL, AW, WL and SWL) for October, November and December 2019 are summarised in **Table 2.19.**

In this reporting period, the monthly STG and ANI decreased from October to November, especially remarkable for ANI (from 12.00 to 5.46), but then remained relatively steady in December 2019. The running quarterly STG and ANI decreased from October to December. Although the running quarterly ANI in December fell below the action level (i.e. ANI < 9.35), the running quarterly STG remained above the action level (i.e. STG \geq 1.86), therefore the Action Level for CWD monitoring was not triggered.

Compared with the previous reporting period, there are drastic decreases in both running quarterly STG (from 5.36 to 2.80) and running quarterly ANI (from 21.98 to 8.18). While comparing with the same quarter of last year (i.e. October to December 2018), both the running quarterly STG and ANI slightly decreased from 3.16 to 2.80 and from 10.36 to 8.18 respectively. As there is no significant change in deployment of works vessels and barges in this quarter comparing with the same quarter of last year (although there were comparatively more marine filling barges and reduced ground improvement works barges operating in this year), there is no obvious relationship between 3RS marine works activities and the decrease of running quarterly encounter rates in this reporting period. It is also important to note that dolphins move around within their habitat across the Pearl River Estuary Region due to both natural and anthropogenic factors and thus there is possible fluctuations of CWD numbers from year to year. Detailed analysis will be provided in the Annual Report.

Table 2.19: Summary of Monthly and Running Quarterly STG and ANI of Chinese White Dolphin for the Same Quarter Last Year, Previous Quarter, and Current Reporting Period

	Same Q	uarter of L	ast Year	Previou	s Reportin	g Period	Current Reporting Period			
	Oct 18	Nov 18	Dec 18	Jul 19	Aug 19	Sep 19	Oct 19	Nov 19	Dec 19	
Monthly STG	3.07	4.85	1.67	7.64	3.95	4.47	3.33	2.50	2.56	
Monthly ANI	8.97	14.28	8.10	31.72	16.50	17.63	12.00	5.46	6.98	
Running Quarterly STG	4.19	4.29	3.16	4.37	4.92	5.36	3.91	3.42	2.80	
Running Quarterly ANI	13.71	13.19	10.36	17.72	19.69	21.98	15.32	11.63	8.18	

Note: For detailed calculations of encounter rates STG and ANI for the current reporting period, please refer to the Construction Phase Monthly EM&A Report No. 46, 47 and 48.

Group Size

Between October and December 2019, the group size of CWD sightings ranged from 1 to 14 dolphins. The average group size of CWDs was 2.9 dolphins per group which is smaller than that of the last quarter which was 4.1. The average group size of CWDs in this reporting quarter is also smaller than that of the same quarter of last year (3.3 dolphins per group).

In this reporting quarter, CWD sightings with small group size (i.e. 1-2 dolphins) were dominant. Amongst all 38 sightings, there was only one sighting with large group size (i.e. 10 or more dolphins). The large CWD group was sighted in WL.

There were no distinct distribution patterns of small-sized and medium-sized CWD groups observed in the current reporting period. Sighting locations of CWD groups with different group sizes are depicted in **Figure 2.6**.

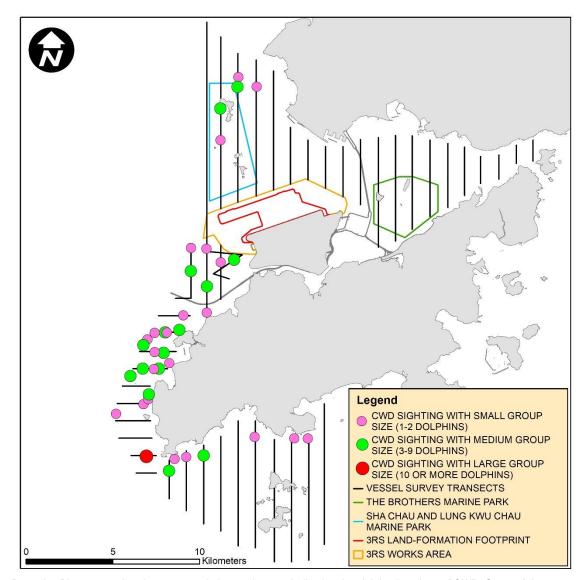


Figure 2.6: Sighting Locations of Chinese White Dolphins with Different Group Sizes

Remarks: Please note that there are 38 circles on the map indicating the sighting locations of CWD. Some of them were very close to each other and therefore appear overlapped on this sighting distribution map.

Activities and Association with Fishing Boats

During October to December 2019, four sightings of CWDs were recorded with feeding activities. One of these sightings was observed in association with operating gillnetter in SWL.

The number of sightings with feeding recorded in the current reporting period is much lower than the last reporting period (18 sightings involved feeding activities without association with fishing boat between July and September 2019). The number of CWD sightings with feeding activities is also lower compared with the data in the same quarter of last year (i.e. 10 sightings between October and December 2018).

The sighting locations of CWDs engaged in different behaviour during the current reporting period are illustrated in **Figure 2.7**.

Legend

FORAGING

SOCIALIZING

TRAVELING

VESSEL SURVEY TRANSECTS

THE SOTHERS MARINE PARK

SHA CHAU AND LUNG KWU CHAU

MARINE PARK

SHA CHAU AND LUNG KWU CHAU

MARINE PARK

SHA CHAU AND FORMATION FOOTPRINT

SRS WORKS AREA

Figure 2.7: Sighting Locations of Chinese White Dolphins Engaged in Different Behaviours

Mother-calf Pairs

From October to December 2019, three sightings of CWDs were recorded with the presence of mother-and-unspotted calf and/or mother-and-unspotted juvenile, which is fewer than that of the last reporting quarter (i.e. 11 sightings between July and September 2019). The number is also fewer than that recorded in the same quarter of last year (i.e. six sightings between October and December 2018). All these sightings were recorded in WL survey area.

The locations of CWD sightings with the presence of mother-and-unspotted calf and/or mother-and-unspotted juvenile are shown in **Figure 2.8**.

Legend

SIGHTING LOCATION OF MOTHER-UC
ANDIOR MOTHER-UPAIR

VESSEL SURVEY TRANSECTS
THE MOST HER WINNIE PARK
SHA CHAU AND LUNG KWU CHAU
MARINE PARK
SHA CHAU AND LUNG KWU CHAU
MARINE PARK
SHA CHAU AND FORMATION FOOTPRINT

STR SLAND-FORMATION FOOTPRINT

□ 3RS WORKS AREA

Figure 2.8: Sighting Locations of Mother-calf Pairs

Photo Identification

During October to December 2019, a total number of 56 different CWD individuals were identified altogether for 83 times. Re-sighting information of CWD individuals provides an initial idea of their range use and apparent connection between different areas around Lantau. Amongst these 56 different CWD individuals, 20 animals (i.e. NLMM004, NLMM006, NLMM013, NLMM016, NLMM018, NLMM019, SLMM003, SLMM010, SLMM012, SLMM014, SLMM028, SLMM037, SLMM049, SLMM052, SLMM053, SLMM060, WLMM007, WLMM008, WLMM029 and WLMM054) were sighted for more than once.

Seven individuals including NLMM004, NLMM018, NLMM019, SLMM010, SLMM012, SLMM049 and WLMM054 were re-sighted in different survey areas during this reporting period. NLMM004, NLMM018 and NLMM019 had cross-area movement between NWL (including AW transects) and WL survey areas, while the others had cross-area movement between WL and SWL survey areas. The most frequently re-sighted individual in this reporting quarter was NLMM004 which has been

encountered altogether for 5 times. The number of re-sighted CWD individuals and the number of CWD individuals showing cross-area movement from October to December 2019 are both lower than those of the last reporting quarter (36 and 14 individuals respectively).

A summary of photo identification works is presented in **Table 2.20**. Representative photos of the 56 identified individuals and figures depicting the sighting locations of the aforementioned 20 resighted individuals recorded in this reporting period are presented **Appendix C**.

Table 2.20: Summary of Photo Identification

Individual	Date of Sighting		Area	
ID	sighting	Group No.		
NLMM001	18-Dec-19	3	WL	
NLMM004	3-Oct-19	1	AW	
		2	WL	
	10-Oct-19	3	NWL	
	11-Nov-19	3	NWL	
	16-Dec-19	3	NWL	
NLMM006	10-Oct-19	3	NWL	
	16-Dec-19	2	NWL	
NLMM013	10-Oct-19	3	NWL	
	11-Nov-19	3	NWL	
	16-Dec-19	2	NWL	
NLMM016	3-Oct-19	6	WL	
	18-Dec-19	2	WL	
NLMM018	3-Oct-19	1	AW	
		2	WL	
NLMM019	3-Oct-19	1	AW	
	11-Nov-19	1	NWL	
	22-Nov-19	4	WL	
NLMM020	11-Nov-19	1	NWL	
NLMM023	10-Oct-19	2	NWL	
NLMM052	3-Oct-19	1	AW	
NLMM053	3-Oct-19	1	AW	
NLMM063	16-Dec-19	3	NWL	
NLMM068	3-Oct-19	1	AW	
NLMM071	3-Oct-19	1	AW	
NLMM072	16-Dec-19	3	NWL	
SLMM003	3-Oct-19	7	WL	
	12-Nov-19	1	WL	
SLMM010	3-Oct-19	8	WL	
	10-Dec-19	2	SWL	
SLMM011	11-Nov-19	1	NWL	
SLMM012	21-Nov-19	4	SWL	
	18-Dec-19	3	WL	
SLMM014	3-Oct-19	8	WL	
	18-Dec-19	4	WL	
SLMM022	3-Oct-19	8	WL	
SLMM025			WL	
SLMM028	3-Oct-19	8	WL	
	22-Nov-19	1	WL	
SLMM029	3-Oct-19	8	WL	
SLMM031	21-Nov-19	4	SWL	

Individual ID	Date of Sighting Sighting Group No.		Area	
SLMM037	3-Oct-19	7	WL	
	12-Nov-19	1	WL	
SLMM044	18-Dec-19 3		WL	
SLMM049	3-Oct-19	8	WL	
	22-Nov-19	6	SWL	
SLMM050	18-Dec-19	3	WL	
SLMM052	3-Oct-19	4	WL	
	12-Nov-19 1		WL	
SLMM053	3-Oct-19	8	WL	
	22-Nov-19	4	WL	
SLMM060	2-Oct-19	3	SWL	
	21-Nov-19	2	SWL	
WLMM001	22-Nov-19	2	WL	
WLMM003	10-Dec-19	3	SWL	
WLMM006	22-Nov-19	2	WL	
WLMM007	3-Oct-19	8	WL	
	18-Dec-19	5	WL	
WLMM008	22-Nov-19	5	WL	
	18-Dec-19	5	WL	
WLMM011	3-Oct-19	6	WL	
WLMM018	3-Oct-19	8	WL	
WLMM027	18-Dec-19	1	WL	
WLMM029	3-Oct-19	8	WL	
	22-Nov-19	2	WL	
WLMM049	10-Oct-19	1	NWL	
WLMM054	4-Oct-19	5	SWL	
	11-Oct-19	1	WL	
		2	WL	
	18-Dec-19	1	WL	
WLMM056	21-Nov-19	4	SWL	
WLMM063	22-Nov-19	2	WL	
WLMM065	18-Dec-19	3	WL	
WLMM067	18-Dec-19	3	WL	
WLMM071	3-Oct-19	5	WL	
WLMM073	3-Oct-19	7	WL	
WLMM078	3-Oct-19	8	WL	
WLMM079	3-Oct-19	7	WL	
	WLMM104 3-Oct-19		WL	
	WLMM107 3-Oct-19		6 WL	
WLMM131	3-Oct-19	7	WL	
WLMM132	3-Oct-19	7	WL	
WLMM149 3-Oct-19		6	WL	

2.5.2.2 Land-based Theodolite Tracking Survey

Survey Effort

During October to December 2019, a total of nine days of land-based theodolite tracking survey effort were completed, including six days on Lung Kwu Chau and three days on Sha Chau. In total, 10 CWD groups were tracked from the Lung Kwu Chau station while no CWD groups were tracked from the Sha Chau station, with an overall 0.19 CWD groups sighted per survey hour.

Information on survey effort and CWD groups sighted during land-based theodolite tracking surveys are presented in **Table 2.21**. Details on the survey effort and CWD groups tracked are presented in **Appendix C**. The first sighting locations of CWD groups tracked between October and December 2019 are shown in **Figure 2.9**.

Table 2.21: Summary of Survey Effort and CWD Group of Land-based Theodolite Tracking Survey

Land-based Station	# of Survey Sessions	Survey Effort (hh:mm)	# CWD Groups Sighted	CWD Group Sighting per Survey Hour
October 2019				
Lung Kwu Chau	2	12:00	5	0.42
Sha Chau	1	06:00	0	0
TOTAL	3	18:00	5	0.28
November 2019				
Lung Kwu Chau	2	12:00	2	0.17
Sha Chau	1	06:00	0	0
TOTAL	3	18:00	2	0.11
December 2019				
Lung Kwu Chau	2	12:00	3	0.25
Sha Chau	1	06:00	0	0
TOTAL	3	18:00	3	0.17
OVERALL	9	54:00	10	0.19

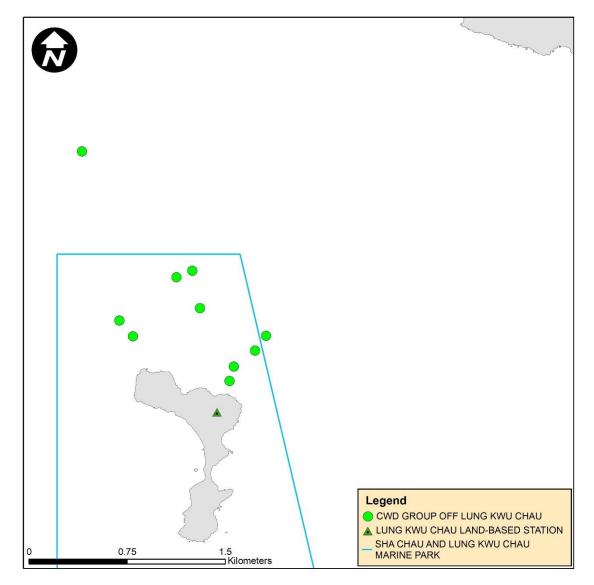


Figure 2.9: Plots of First Sightings of All CWD Groups from Land-based Stations

2.5.2.3 Progress Update on PAM

An Ecological Acoustic Recorder (EAR) has been deployed and positioned to the south of Sha Chau Island inside the SCLKCMP (**Figure 2.10**) with 20% duty cycle, while data from the EAR intended primarily to supplement the data collected from the land-based theodolite tracking survey station on Sha Chau. In this reporting period, the EAR has been retrieved on 23 October and 6 December 2019 for data collection and subsequently redeployed. The EAR deployment is generally for 6 weeks prior to data retrieval for analysis. As the period of data collection and analysis takes more than four months, PAM results could not be reported in quarterly intervals but report for supplementing the annual CWD monitoring analysis.

2.5.2.4 Site Audit for CWD-related Mitigation Measures

During the reporting period, silt curtains were in place by the contractors for marine filling works (similar to the previous reporting period), in which dolphin observers were deployed by each contractor in accordance with the Marine Mammal Watching Plan (MMWP). Teams of at least two

dolphin observers were deployed at 3 to 8 dolphin observation stations by the contractors for continuous monitoring of the DEZ by all contractors for DCM works and seawall construction that were similar to the previous reporting period in accordance with the DEZ Plan. Trainings for the proposed dolphin observers on the implementation of MMWP and DEZ monitoring were provided by the ET prior to the aforementioned works, with a cumulative total of 679 individuals being trained and the training records were kept by the ET. From the contractors' MMWP observation records, no dolphin or other marine mammals were observed within or around the silt curtains. As for DEZ monitoring records, no dolphin or other marine mammals were observed within the DEZs in this reporting period, whilst there was one record of dolphin sighting outside the DEZ of DCM works in December 2019. The contractors' records were also audited by the ET during site inspection.

Audits of acoustic decoupling for construction vessels were carried out during weekly site inspection and summarised in **Section 2.6**. Summary of audits of SkyPier HSFs route diversion and speed control and construction vessel management are presented in **Section 2.7** and **Section 2.8** respectively.

2.6 Environmental Site Inspection

Site inspections of the construction works were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures for the Project. Bi-weekly site inspections were also conducted by the IEC. Besides, *ad-hoc* site inspections were conducted by ET and IEC if environmental problems were identified, or subsequent to receipt of an environmental complaint, or as part of the investigation work. These site inspections provided a direct means to reinforce the specified environmental protection requirements and pollution control measures in construction sites.

During site inspections, environmental situation, status of implementation of pollution control and mitigation measures were observed. Environmental documents and site records, including waste disposal record, maintenance record of environmental equipment, and relevant environmental permit and licences, were also checked on-site. Observations were recorded in the site inspection checklist and passed to the contractor together with the appropriate recommended mitigation measures where necessary in order to advise contractors on environmental improvement, awareness and on-site enhancement measures. The observations were made with reference to the following information during the site inspections:

- The EIA and EM&A requirements;
- Relevant environmental protection laws, guidelines, and practice notes;
- The EP conditions and other submissions under the EP;
- Monitoring results of EM&A programme;
- Works progress and programme;
- Proposal of individual works;
- · Contract specifications on environmental protection; and
- Previous site inspection results.

Good site practices were implemented in the project to enhance environmental performance. Key examples are highlighted here:

- Contractors' representatives were stationed in Marine Traffic Control Centre to ensure the travelling of their vessels in the vicinity of the Project Area comply with the requirements of MTRMP-CAV including speed control and predefined routes.
- 2. Regular Toolbox training on the control of the air exhaust from the marine vessel operation was conducted by contractor to enhance the understanding of their frontline

- staffs on the regulatory requirements of environmental related issues and provide information on practical measures to minimise environmental impacts from the operation of machineries.
- 3. Sorting facilities were set up on the existing airport island to step up the reuse of excavated materials from 3RS and other AAHK's contracts, thus reducing C&D waste being transferred to public fill facilities.



Marine Traffic Control Centre for Monitoring Construction Vessels



Toolbox Training Conducted by Contractor



Sorting Facility on the Existing Airport Island

Besides, advices were given when necessary to ensure the construction workforce were familiar with relevant procedures, and to maintain good environmental performance on site. Regular toolbox talks on environmental issues were organised for the construction workforce by the contractors to ensure understanding and proper implementation of environmental protection and pollution control mitigation measures.

During the reporting period, implementation of recommended landscape and visual mitigation measures (CM1 – CM10) where applicable was monitored weekly in accordance with the Manual and no non-conformity was recorded. In case of non-conformity, specific recommendations will be made, and actions will be proposed according to the Event and Action Plan. The monitoring status is summarised in **Appendix B**.

A summary of implementation status of the environmental mitigation measures for the construction phase of the Project during the reporting period is provided in **Appendix B**.

2.7 Audit of SkyPier High Speed Ferries

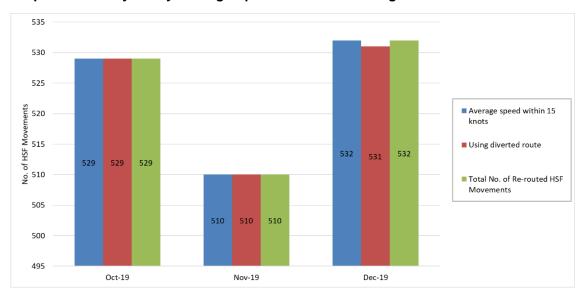
In total, 1,571 ferry movements between HKIA SkyPier and Zhuhai / Macau were audited in the reporting period. The daily movements of all SkyPier HSFs in the reporting period ranged between 78 and 102, which fell within the maximum daily cap number of 125.

The average speeds of all HSFs travelling through the Speed Control Zone (SCZ) ranged from 10.4 to 14.0 knots. All HSFs travelled through the SCZ with average speed within 15 knots in compliance with the Marine Travel Routes and Management Plan for High Speed Ferries of SkyPier (the SkyPier Plan).

One ferry movement was recorded with deviation from the diverted route. Notice of deviation was sent to the ferry operator and the case was investigated. The case was due to strong tidal wave and current. The summary of the SkyPier Plan monitoring result is presented in **Graph 1**.

Insufficient AIS data cases were received from some HSFs during the reporting period. After investigation, it was found that AIS data for the concerned ferries were missing due to signal interference as reported by the ferry operators after checking the condition of the AIS transponders. Vessel captains were requested to provide the radar track photos which indicated

the vessels entered the SCZ through the gate access points and there was no speeding in the SCZ. Ferry operators' explanations were accepted.



Graph 1: Summary of SkyPier High Speed Ferries Monitoring Results

2.8 Audit of Construction and Associated Vessels

On the implementation of the updated Marine Travel Routes and Management Plan for Construction and Associated Vessels (MTRMP-CAV), the Maritime Surveillance System (MSS) automatically recorded deviation cases such as speeding, entering no entry zone, and not traveling through the designated gates. ET conducted bi-weekly audit of relevant information including AIS data, vessel tracks and other relevant records to ensure sufficient information were provided by the system and the contractors complied with the requirements of the MTRMP-CAV. The contactors submitted 3-month rolling vessel plans for construction vessel activities to AAHK in order to help maintain the number of construction vessels to a practicable minimum. The IEC also performed audit on the compliance of the requirements as part of the EM&A programme.

During the reporting period, deviations including speeding within the works area, entry from non-designated gates, and entering no-entry zones were identified. After investigation by the contractor's Marine Traffic Control Centre (MTCC) representatives, all the concerned captains were reminded to comply with the requirements of the MTRMP-CAV.

A total of 10 skipper training workshops were held by ET during the reporting period with 94 concerned captains of construction vessels associated with the 3RS contracts to familiarise them with the predefined routes, general education on local cetaceans, guidelines for avoiding adverse water quality impact, the required environmental practices / measures while operating construction and associated vessels under the Project, and guidelines for operating vessels safely in the presence of CWDs. Another 5 skipper training workshops were held with 9 captains by contractors' Environmental Officers and competency tests were conducted subsequently with the trained captains by ET.

2.9 Review of the Key Assumptions Adopted in the EIA Report

With reference to Appendix E of the Manual, it is noted that the key assumptions adopted in approved EIA report for the construction phase are still valid and no major changes are involved.

The environmental mitigation measures recommended in the approved EIA Report remain applicable and shall be implemented in undertaking construction works for the Project.

3 Report on Non-compliance, Complaints, Notifications of Summons and Prosecutions

3.1 Compliance with Other Statutory Environmental Requirements

During the reporting period, environmental related licenses and permits required for the construction activities were checked. No non-compliance with environmental statutory requirements was recorded.

3.2 Analysis and Interpretation of Complaints, Notification of Summons and Status of Prosecutions

3.2.1 Complaints

No construction activities-related complaint was received during the reporting period.

3.2.2 Notifications of Summons or Status of Prosecution

No notification of summons nor prosecution was received during the reporting period.

3.3 Cumulative Statistics

Cumulative statistics on valid exceedance, non-compliance, complaints, notifications of summons and status of prosecutions are summarised in **Table 3.1** and **Table 3.2**.

Table 3.1: Statistics for Valid Exceedances for the Environmental Monitoring

		Total No. Recorded in the Reporting Period	Total No. Recorded since the Project Commenced
1-hr TSP	Action Level	0	0
	Limit Level	0	0
Noise	Action Level	0	0
	Limit Level	0	0
Waste	Action Level	0	0
	Limit Level	0	0
Water	Action Level	0	0
	Limit Level	0	0
CWD	Action Level	0	0
	Limit Level	0	0

Remark: Non-project related triggers of Action or Limit Level are not shown in this table.

Table 3.2: Statistics for Non-compliance, Complaints, Notifications of Summons and Prosecution

Reporting Period		Cumulative Statistics			
	Non- compliance	Complaints	Notifications of Summons	Prosecutions	
This reporting period	0	0	0	0	
From 28 December 2015 to end of the reporting period	0	17	1	1	

4 Conclusion and Recommendation

In this quarterly period from 1 Oct 2019 to 31 December 2019, the EM&A programme has been implemented as planned, including 96 sets of air quality measurements, 56 sets of construction noise measurements, 40 sets of water quality measurements, 6 complete sets of vessel line transect surveys and 9 days of land-based theodolite tracking survey effort for CWD monitoring, as well as environmental site inspections and waste monitoring for the Project's construction works.

The key activities of the Project carried out in the reporting period included reclamation works and land-side works. Reclamation works included DCM works, marine filling and seawall construction. Land-side works involved mainly foundation and substructure work for Terminal 2 expansion, modification and tunnel work for APM and BHS, and preparation work for utilities, with activities include site establishment, site office construction, road and drainage works, cable ducting, demolition of existing facilities, piling, and excavation works.

Monitoring results of construction dust, construction noise, construction waste, and CWD did not trigger the corresponding Action and Limit Levels in the reporting period. All site observations made by the ET were recorded in the site inspection checklists and passed to the contractor together with the recommended follow-up actions.

For water quality, the water quality monitoring results for DO, turbidity, total alkalinity, nickel and chromium obtained during the reporting period were within the corresponding Action and Limit Levels stipulated in the EM&A programme. Relevant investigation and follow-up actions will be conducted according to the EM&A programme if the corresponding Action and Limit Levels are triggered. For SS, some testing results triggered the relevant Action or Limit Levels, and the corresponding investigations were conducted accordingly. The investigation findings concluded that the cases were not related to the Project. To conclude, the construction activities in the reporting period did not introduce adverse impact to all water quality sensitive receivers.

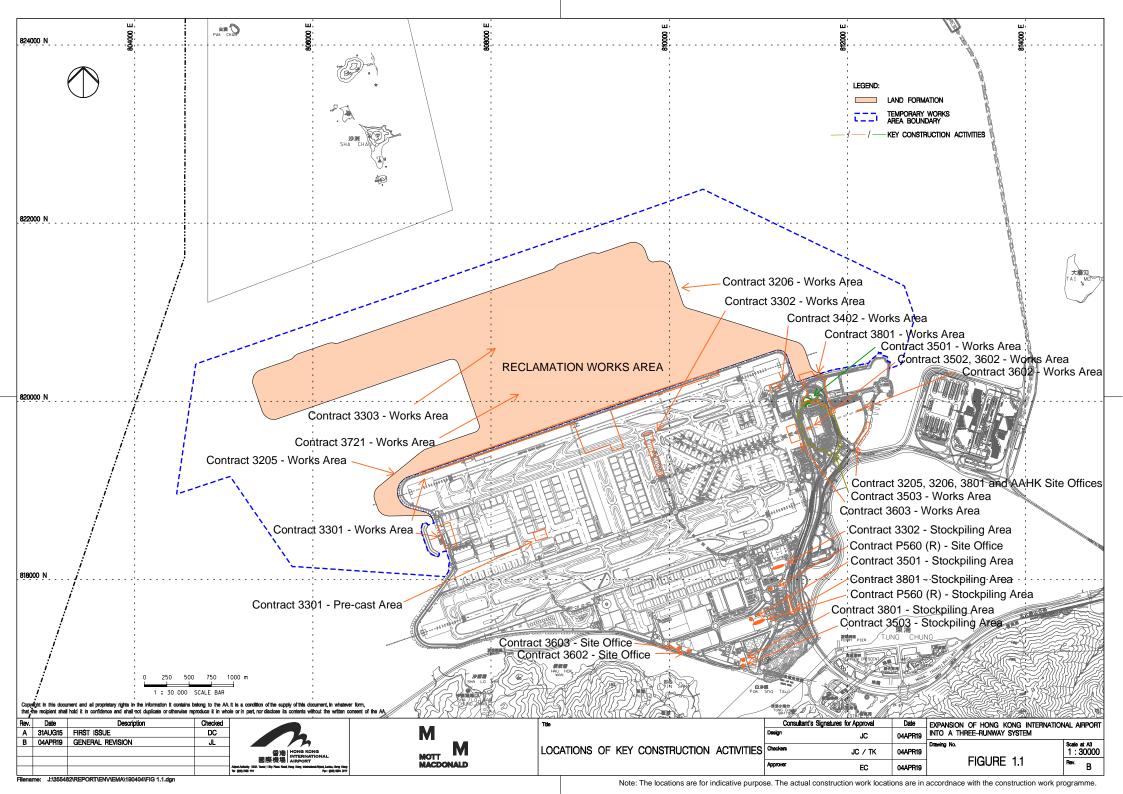
In total, 1,571 ferry movements between HKIA SkyPier and Zhuhai / Macau were audited in the reporting period. All HSFs travelled through the SCZ with average speed within 15 knots in compliance with the SkyPier Plan. One ferry movement had minor deviation from the diverted route during the reporting period. ET investigated the deviation case and confirmed that the case was related to strong tidal wave and current.

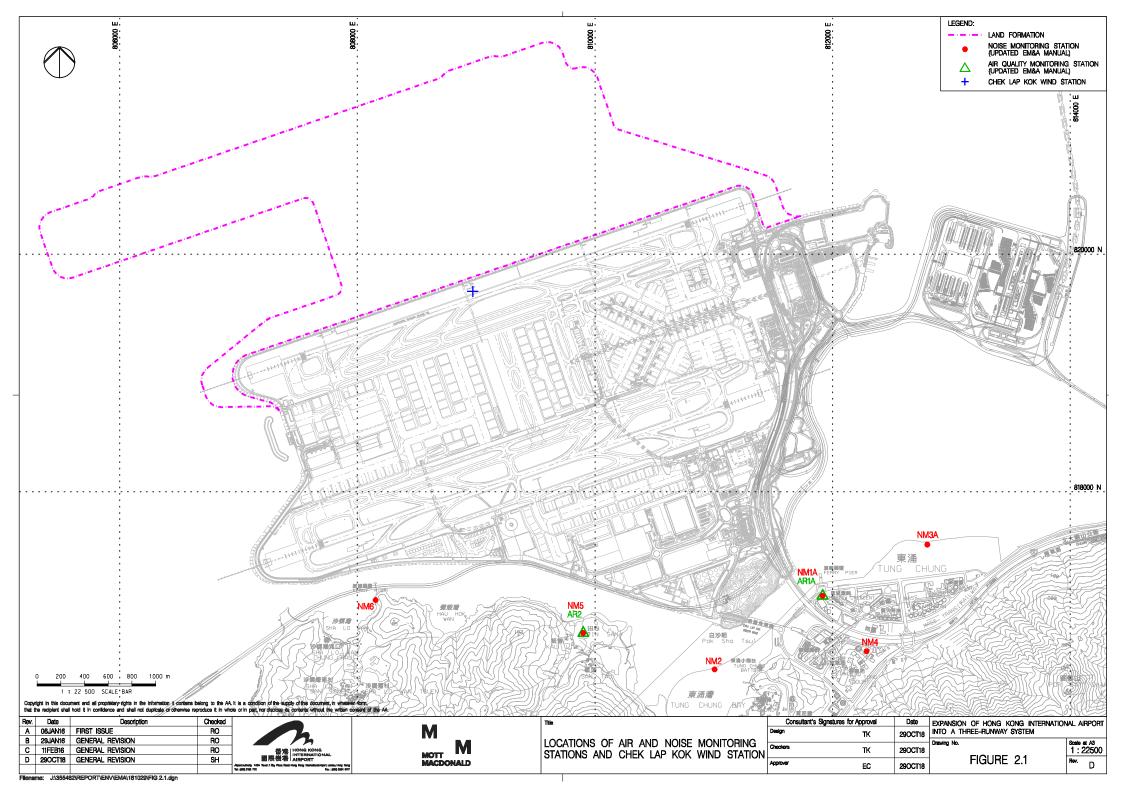
During the reporting period, ET conducted bi-weekly audit of the MSS to ensure the system recorded all deviation cases accurately and the contractors fully complied with the requirements of the MTRMP-CAV. A total of 5 skipper training workshops were held by contractors' Environmental Officers and competency tests were conducted subsequently with the trained captains by ET.

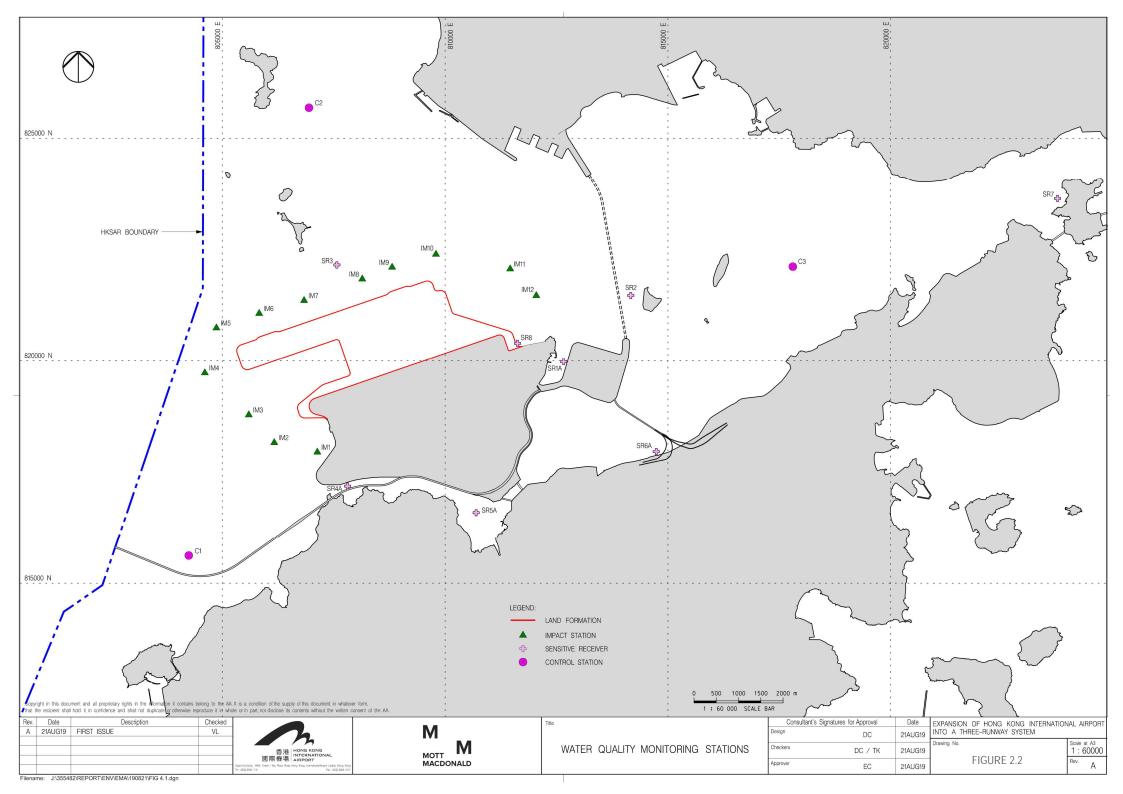
On the implementation of MMWP, dolphin observers were deployed by the contractors for laying of silt curtains for marine filling works in accordance with the plan. On the implementation of DEZ Plan, dolphin observers were deployed for continuous monitoring of the DEZ by the contractors for DCM works and seawall construction in accordance with the DEZ Plan. Trainings for the proposed dolphin observers were provided by the ET prior to the aforementioned works, with the training records kept by the ET. From the contractors' MMWP observation records and DEZ monitoring records, no dolphin or other marine mammals were observed within or around the silt curtains or within the DEZ in this reporting period. Nevertheless, ET was notified by the contractor that there was one record of dolphin sighting outside the DEZ of DCM works by the contractor. Audits of acoustic decoupling for construction vessels were also carried out by ET.

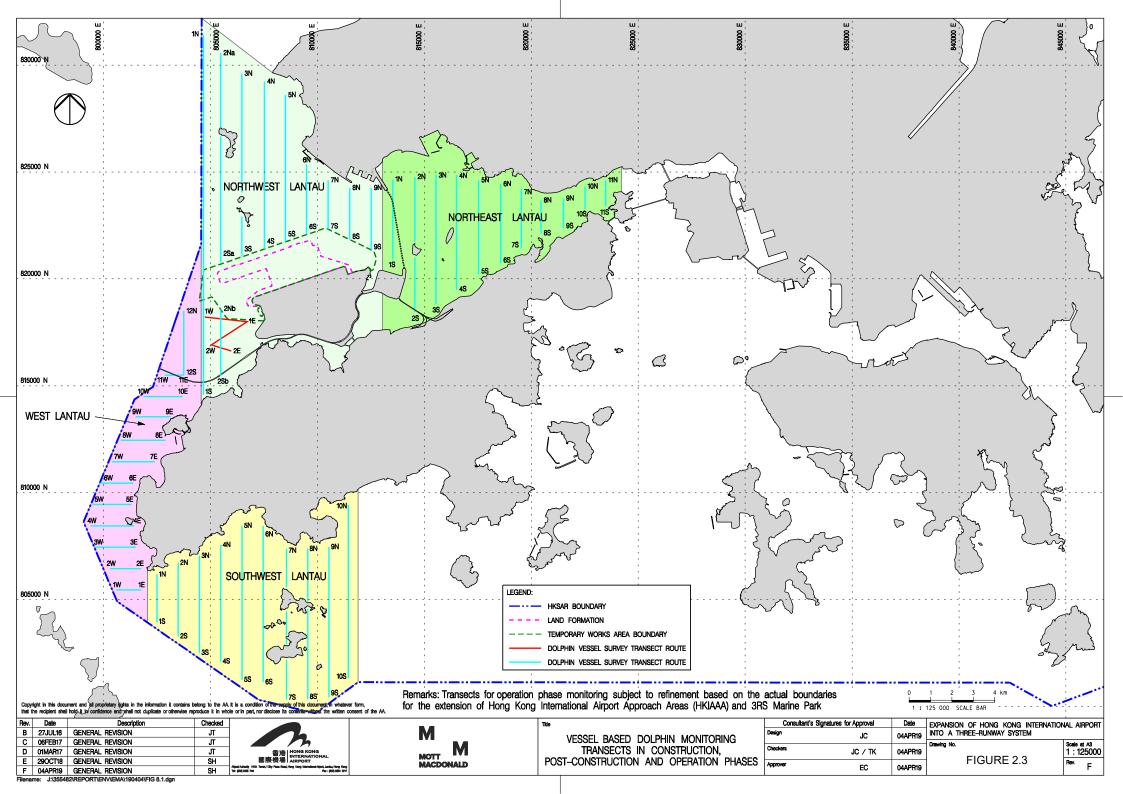
The recommended environmental mitigation measures, as included in the EM&A programme, were effectively implemented during the reporting period. Also, the EM&A programme implemented by the ET has effectively monitored the construction activities and ensured the proper implementation of mitigation measures.

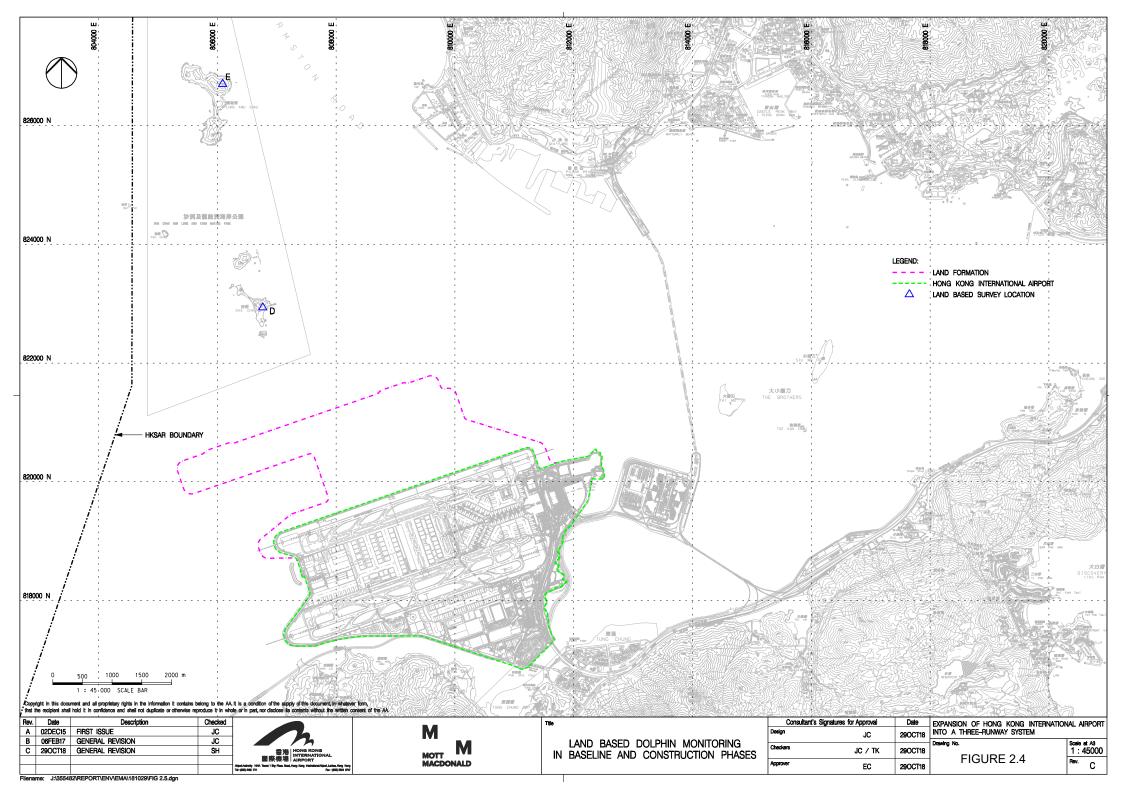
Figures

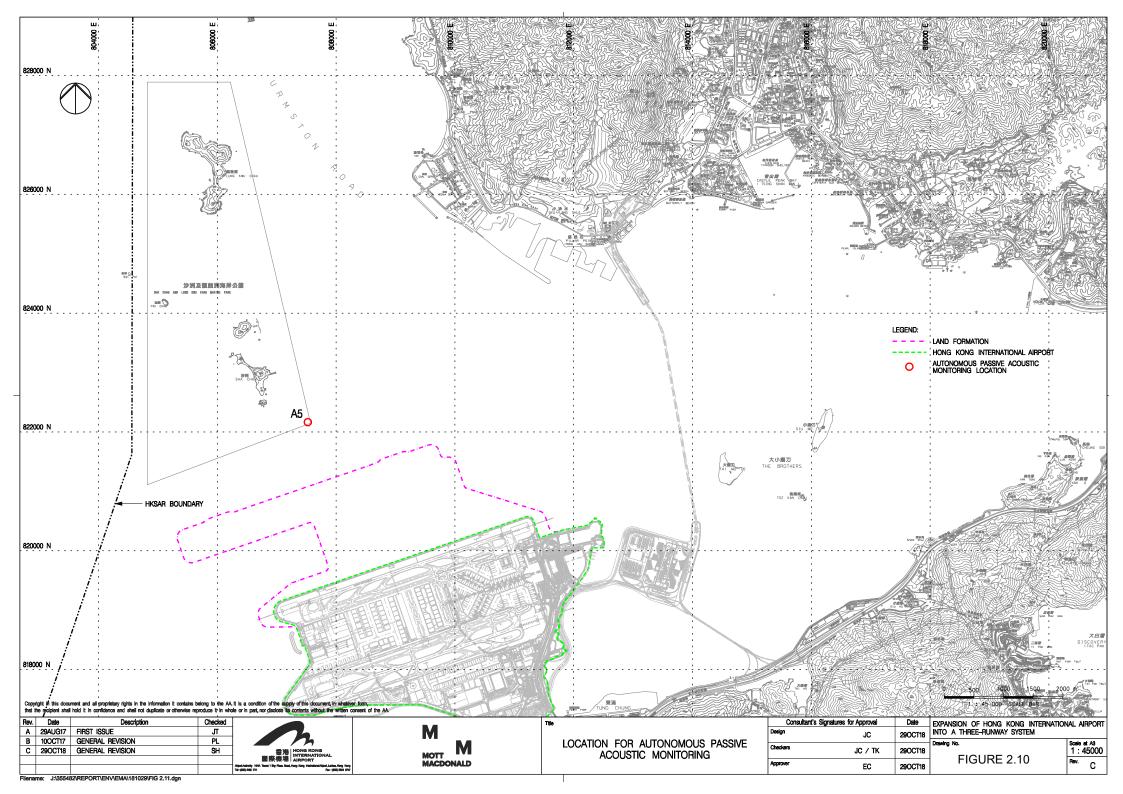













Appendix A. Project Organization Chart

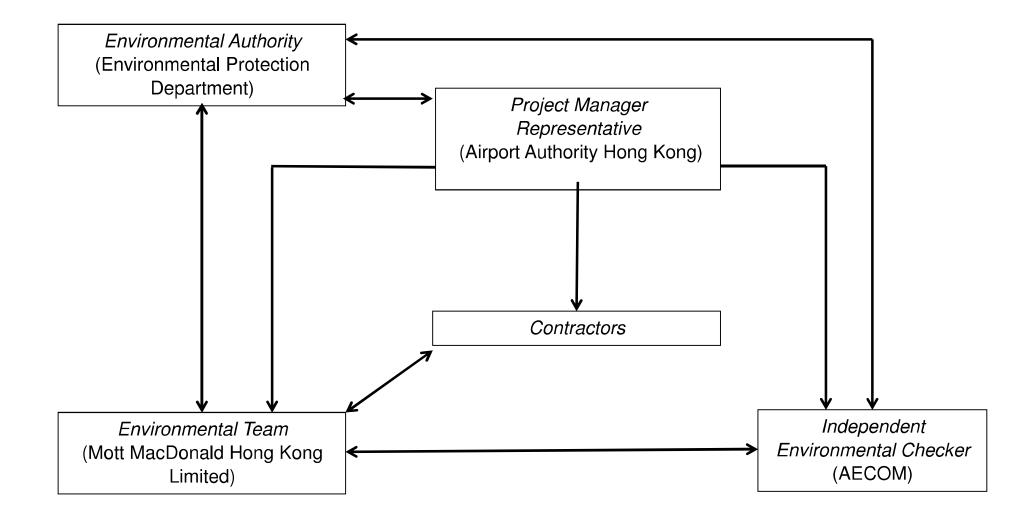

Appendix B. Environmental Mitigation Implementation Schedule (EMIS) for Construction Phase



Environmental Mitigation Implementation Schedule (EMIS) for Construction Phase

EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^
			Air Quality Impact – Construction Phase		
5.2.6.2	2.1	-	Dust Control Measures ■ Water spraying for 12 times a day or once every two hours for 24-hour working at all active works area.	Within construction site / Duration of the construction phase	I
5.2.6.3	2.1	-	 Covering of at least 80% of the stockpiling area by impervious sheets. Water spraying of all dusty materials immediately prior to any loading transfer operation so as to keep the dusty material wet during material handling. 	Within construction site / Duration of the construction phase	I
5.2.6.4	2.1	-	Dust control practices as stipulated in the Air Pollution Control (Construction Dust) Regulation should be adopted. These practices include: Good Site Management Good site management is important to help reducing potential air quality impact down to an acceptable level. As a general guide, the Contractor should maintain high standard of housekeeping to prevent emission of fugitive dust. Loading, unloading, handling and storage of raw materials, wastes or byproducts should be carried out in a manner so as to minimise the release of visible dust emission. Any piles of materials accumulated on or around the work areas should be cleaned up regularly. Cleaning, repair and maintenance of all plant facilities within the work areas should be carried out in a manner minimising generation of fugitive dust emissions. The material should be handled properly to prevent fugitive dust emission before cleaning.	Within construction site / Duration of the construction phase	I
			Disturbed Parts of the Roads Each and every main temporary access should be paved with concrete, bituminous hardcore materials or metal plates and kept clear of dusty materials; or Unpaved parts of the road should be sprayed with water or a dust suppression chemical so as to keep the entire road surface wet.	Within construction site / Duration of the construction phase	I
			 Exposed Earth Exposed earth should be properly treated by compaction, hydroseeding, vegetation planting or seating with latex, vinyl, bitumen within six months after the last construction activity on the site or part of the site where the exposed earth lies. 	Within construction site / Duration of the construction phase	1



Ref.	Condition	ondition o	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^
		Loading, Unloading or Transfer of Dusty Materials All dusty materials should be sprayed with water immediately prior to any loading or transfer operation so as to keep the dusty material wet.	Within construction site / Duration of the construction phase	I
		Debris Handling • Any debris should be covered entirely by impervious sheeting or stored in a debris collection area sheltered on the top and the three sides; and	Within construction site / Duration of the construction phase	I
		 Transport of Dusty Materials Vehicle used for transporting dusty materials/spoils should be covered with tarpaulin or similar material. The cover should extend over the edges of the sides and tailboards. 	Within construction site / Duration of the construction phase	I
		Wheel washing Vehicle wheel washing facilities should be provided at each construction site exit. Immediately before leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels.	Within construction site / Duration of the construction phase	I
		Use of vehicles The speed of the trucks within the site should be controlled to about 10km/hour in order to reduce adverse dust impacts and secure the safe movement around the site;	Within construction site / Duration of the construction phase	I
		 Immediately before leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels; and 		
		• Where a vehicle leaving the construction site is carrying a load of dusty materials, the load should be covered entirely by clean impervious sheeting to ensure that the dusty materials do not leak from the vehicle.		
		Site hoarding • Where a site boundary adjoins a road, street, service lane or other area accessible to the public, hoarding of not less than 2.4m high from ground level should be provided along the entire length of that portion of the site boundary except for a site entrance or exit.	Within construction site / Duration of the construction phase	I
2.1	-	Best Practices for Concrete Batching Plant The relevant best practices for dust control as stipulated in the Guidance Note on the Best Practicable Means for Cement Works (Concrete Batching Plant) BPM 3/2 as well as in the future Specified Process licence should be adopted. The best practices are recommended to be applied to both the land based and floating concrete batching plants. Best practices include:	Within Concrete Batching Plant / Duration of the construction phase	N/A
	2.1	2.1 -	All dusty materials should be sprayed with water immediately prior to any loading or transfer operation so as to keep the dusty material wet. Debris Handling	Loading, Unloading or Transfer of Dusty Materials • All dusty materials should be sprayed with water immediately prior to any loading or transfer operation site / Duration of the so as to keep the dusty material wet. Debris Handling • Any debris should be covered entirely by impervious sheeting or stored in a debris collection area sheltered on the top and the three sides; and • Before debris is dumped into a chute, water should be sprayed so that it remains wet when it is dumped. Transport of Dusty Materials • Vehicle used for transporting dusty materials/spoils should be covered with tarpaulin or similar material. The cover should extend over the edges of the sides and talibbards. Wheel washing • Vehicle wheel washing facilities should be provided at each construction site exit. Immediately before leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels. Use of vehicles • Inmediately before leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels; and • Where a vehicle leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels; and • Where a vehicle leaving the construction site, every vehicle should be washed to remove any dusty materials from its body and wheels; and • Where a steb boundary adjoins a road, street, service lane or other area accessible to the public, hoading of not less than 2.4m high from ground level should be provided along the entire length of that portion of the sile boundary except for a site entrance or exit. Best Practices for Concrete Batching Plant The relevant best practices for dust control as stipulated in the Guidance Note on the Best Practicable Means for Cernent Works (Concrete Batching Plant) BPM 3/2 as well as in the future Specified Process licence should be adpoiled. The best practices are recommended to be applied to both the land based and foating concrete batching plants. Best pr



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented? ⁴	
			■ The loading, unloading, handling, transfer or storage of cement, pulverised fuel ash (PFA) and/or other equally dusty materials shall be carried in a totally enclosed system acceptable to EPD. All dust-laden air or waste gas generated by the process operations shall be properly extracted and vented to fabric filtering system to meet the required emission limit;			
			• Cement, PFA and/or other equally dusty materials shall be stored in storage silo fitted with audible high level alarms to warn of over-filling. The high-level alarm indicators shall be interlocked with the material filling line such that in the event of the silo approaching an overfilling condition, an audible alarm will operate, and after 1 minute or less the material filling line will be closed;			
			 Vents of all silos shall be fitted with fabric filtering system to meet the required emission limit; 			
			 Vents of cement/PFA weighing scale shall be fitted with fabric filtering system to meet the required emission limit; and 			
			 Seating of pressure relief valves of all silos shall be checked, and the valves re-seated if necessary, before each delivery. 			
			Other raw materials	Within Concrete Batching Plant / Duration of the construction phase	Within Concrete	N/A
			 The loading, unloading, handling, transfer or storage of other raw materials which may generate airborne dust emissions such as crushed rock, sand, stone aggregate, shall be carried out in such a manner to prevent or minimize dust emissions; 			
			The materials shall be adequately wetted prior to and during the loading, unloading and handling operations. Manual or automatic water spraying system shall be provided at all unloading areas, stock piles and material discharge points;			
			 All receiving hoppers for unloading relevant materials shall be enclosed on three sides up to 3 m above the unloading point. In no case shall these hoppers be used as the material storage devices; 			
			• The belt conveyor for handling materials shall be enclosed on top and two sides with a metal board at the bottom to eliminate any dust emission due to wind-whipping effect. Other type of enclosure will also be accepted by EPD if it can be demonstrated that the proposed enclosure can achieve same performance;			
			 All conveyor transfer points shall be totally enclosed. Openings for the passage of conveyors shall be fitted with adequate flexible seals; 			
			 Scrapers shall be provided at the turning points of all conveyors to remove dust adhered to the belt surface; 			
			 Conveyors discharged to stockpiles of relevant materials shall be arranged to minimize free fall as far as practicable. All free falling transfer points from conveyors to stockpiles shall be enclosed with chute(s) and water sprayed; 			
			 Aggregates with a nominal size less than or equal to 5 mm should be stored in totally enclosed structure such as storage bin and should not be handled in open area. Where there is sufficient buffer area surrounding the concrete batching plant, ground stockpiling may be used; 			



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion	Mitigation Measures Implemented?
				of measures	
			 The stockpile shall be enclosed at least on top and three sides and with flexible curtain to cover the entrance side; 		
			 Aggregates with a nominal size greater than 5 mm should preferably be stored in a totally enclosed structure. If open stockpiling is used, the stockpile shall be enclosed on three sides with the enclosure wall sufficiently higher than the top of the stockpile to prevent wind whipping; and 		
			■ The opening between the storage bin and weighing scale of the materials shall be fully enclosed.		
			Loading of materials for batching	Within Concrete	N/A
			Concrete truck shall be loaded in such a way as to minimise airborne dust emissions. The following control measures shall be implemented:	Batching Plant / Duration of the	
			(a) Pre-mixing the materials in a totally enclosed concrete mixer before loading the materials into the concrete truck is recommended. All dust-laden air generated by the pre-mixing process as well as the loading process shall be totally vented to fabric filtering system to meet the required emission limit; and	construction phase	
			(b) If truck mixing batching or other types of batching method is used, effective dust control measures acceptable to EPD shall be adopted. The dust control measures must have been demonstrated to EPD that they are capable to collect and vent all dust-laden air generated by the material loading/mixing to dust arrestment plant to meet the required emission limit.		
			The loading bay shall be totally enclosed during the loading process.		
			Vehicles	Within Concrete	N/A
			 All practicable measures shall be taken to prevent or minimize the dust emission caused by vehicle movement; and 	Batching Plant / Duration of the	
			• All access and route roads within the premises shall be paved and adequately wetted.	construction phase	
			Housekeeping	Within Concrete	N/A
			 A high standard of housekeeping shall be maintained. All spillages or deposits of materials on ground, support structures or roofs shall be cleaned up promptly by a cleaning method acceptable to EPD. Any dumping of materials at open area shall be prohibited. 	Batching Plant / Duration of the construction phase	
.2.6.6	2.1	-	Best Practices for Asphaltic Concrete Plant	Within Concrete	N/A
			The relevant best practices for dust control as stipulated in the Guidance Note on the Best Practicable Means for Tar and Bitumen Works (Asphaltic Concrete Plant) BPM 15 (94) as well as in the future Specified Process licence should be adopted. These include:	Batching Plant / Duration of the construction phase	
			Design of Chimney		
			• The chimney shall not be less than 3 metres plus the building height or 8 metres above ground level, whichever is the greater;		
			■ The efflux velocity of gases from the main chimney shall not be less than 12 m/s at full load condition;		



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion	Mitigation Measures Implemented?^		
				of measures			
			The flue gas exit temperature shall not be less than the acid dew point; and				
			 Release of the chimney shall be directed vertically upwards and not be restricted or deflected. 				
			Cold feed side	Within Concrete Batching Plant / Duration of the	N/A		
			 The aggregates with a nominal size less than or equal to 5 mm shall be stored in totally enclosed structure such as storage bin and shall not be handled in open area; 				
			• Where there is sufficient buffer area surrounding the plant, ground stockpiling may be used. The stockpile shall be enclosed at least on top and three sides and with flexible curtain to cover the entrance side. If these aggregates are stored above the feeding hopper, they shall be enclosed at least on top and three sides and be wetted on the surface to prevent wind-whipping;	construction phase			
			• The aggregates with a nominal size greater than 5 mm should preferably be stored in totally enclosed structure. Aggregates stockpile that is above the feeding hopper shall be enclosed at least on top and three sides. If open stockpiling is used, the stockpiles shall be enclosed on three sides with the enclosure wall sufficiently higher than the top of the stockpile to prevent wind whipping;				
			 Belt conveyors shall be enclosed on top and two sides and provided with a metal board at the bottom to eliminate any dust emission due to the wind-whipping effect. Other type of enclosure will also be accepted by EPD if it can be demonstrated that the proposed enclosure can be achieve the same performance; 				
			 Scrapers shall be provided at the turning points of all belt conveyors inside the chute of the transfer points to remove dust adhered to the belt surface; 				
			 All conveyor transfer points shall be totally enclosed. Openings for the passages of conveyors shall be fitted with adequate flexible seals; and 				
			 All materials returned from dust collection system shall be transferred in enclosed system and shall be stored inside bins or enclosures. 				
			Hot feed side	Within Concrete Batching Plant / Duration of the construction phase	N/A		
			 The inlet and outlet of the rotary dryer shall be enclosed and ducted to a dust extraction and collection system such as a fabric filter. The particulate and gaseous concentration at the exhaust outlet of the dust collector shall not exceed the required limiting values; 				
			 The bucket elevator shall be totally enclosed and the air be extracted and ducted to a dust collection system to meet the required particulates limiting value; 				
			 All vibratory screens shall be totally enclosed and dust tight with close-fitted access inspection opening. Gaskets shall be installed to seal off any cracks and edges of any inspection openings; 				
			 Chutes for carrying hot material shall be rigid and preferably fitted with abrasion resistant plate inside. They shall be inspected daily for leakages; 				



	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures	Mitigation Measures Implemented?^
				Timing of completion of measures	
			• All hot bins shall be totally enclosed and dust tight with close-fitted access inspection opening. Gaskets shall be installed to seal off any cracks and edges of any inspection openings. The air shall be extracted and ducted to a dust collection system to meet the required particulates limiting value; and		
			 Appropriate control measures shall be adopted in order to meet the required bitumen emission limit as well as the ambient odour level (2 odour units). 		
			Material transportation	Within Concrete	N/A
			 The loading, unloading, handling, transfer or storage of other raw materials which may generate airborne dust emissions such as crushed rocks, sands, stone aggregates, reject fines, shall be carried out in such a manner as to minimize dust emissions; 	Batching Plant / Duration of the construction phase Within Concrete Batching Plant / Duration of the construction phase	
			 Roadways from the entrance of the plant to the product loading points and/or any other working areas where there are regular movements of vehicles shall be paved or hard surfaced; and 		
			 Haul roads inside the Works shall be adequately wetted with water and/or chemical suppressants by water trucks or water sprayers. 		
			Control of emissions from bitumen decanting		N/A
			 The heating temperature of the particular bitumen type and grade shall not exceed the corresponding temperature limit of the same type listed in Appendix 1 of the Guidance Note; 		
			 Tamper-free high temperature cut-off device shall be provided to shut off the fuel supply or electricity in case the upper limit for bitumen temperature is reached; 		construction phase
			 Proper chimney for the discharge of bitumen fumes shall be provided at high level; 		
			The emission of bitumen fumes shall not exceed the required emission limit; and		
			The air-to-fuel ratio shall be properly controlled to allow complete combustion of the fuel. The fuel burners, if any, shall be maintained properly and free from carbon deposits in the burner nozzles.	Within Concrete Batching Plant / Duration of the construction phase	
			Liquid fuel		N/A
			 The receipt, handling and storage of liquid fuel shall be carried out so as to prevent the release of emissions of organic vapours and/or other noxious and offensive emissions to the air. 		
			Housekeeping	Within Concrete	N/A
			A high standard of housekeeping shall be maintained. Waste material, spillage and scattered piles gathered beneath belt conveyors, inside and around enclosures shall be cleared frequently. The minimum clearing frequency is on a weekly basis.	Batching Plant / Duration of the construction phase	
.2.6.7	2.1	-	Best Practices for Rock Crushing Plants	Within Concrete	N/A
- 12			The relevant best practices for dust control as stipulated in the Guidance Note on the Best Practicable Means for Mineral Works (Stone Crushing Plant) BPM 11/1 (95) as well as in the future Specified Process licence should be adopted. These include:	Batching Plant / Duration of the construction phase	



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion	Mitigation Measures Implemented?
				of measures	
			Crushers		
			 The outlet of all primary crushers, and both inlet and outlet of all secondary and tertiary crushers, if not installed inside a reasonably dust tight housing, shall be enclosed and ducted to a dust extraction and collection system such as a fabric filter; 		
			 The inlet hopper of the primary crushers shall be enclosed on top and 3 sides to contain the emissions during dumping of rocks from trucks. The rock while still on the trucks shall be wetted before dumping; 		
			 Water sprayers shall be installed and operated in strategic locations at the feeding inlet of crushers; and 		
			 Crusher enclosures shall be rigid and be fitted with self-closing doors and close-fitting entrances and exits. Where conveyors pass through the crusher enclosures, flexible covers shall be installed at entries and exits of the conveyors to the enclosure. 		
			Vibratory screens and grizzlies	Within Concrete	N/A
			• All vibratory screens shall be totally enclosed in a housing. Screenhouses shall be rigid and reasonably dust tight with self-closing doors or close-fitted entrances and exits for access. Where conveyors pass through the screenhouse, flexible covers shall be installed at entries and exits of the conveyors to the housing. Where containment of dust within the screenhouse structure is not successful then a dust extraction and collection system shall be provided; and	Batching Plant / Duration of the construction phase	
			 All grizzlies shall be enclosed on top and 3 sides and sufficient water sprayers shall be installed at their feeding and outlet areas. 		
			Belt conveyors	Within Concrete	N/A
			 Except for those conveyors which are placed within a totally enclosed structure such as a screenhouse or those erected at the ground level, all conveyors shall be totally enclosed with windshield on top and 2 sides; 	Batching Plant / Duration of the construction phase	
			• Effective belt scraper such as the pre-cleaner blades made by hard wearing materials and provided with pneumatic tensioner, or equivalent device, shall be installed at the head pulley of designated conveyor as required to dislodge fine dust particles that may adhere to the belt surface and to reduce carry-back of fine materials on the return belt. Bottom plates shall also be provided for the conveyor unless it has been demonstrated that the corresponding belt scraper is effective and well maintained to prevent falling material from the return belt; and		
			Except for those transfer points which are placed within a totally enclosed structure such as a screenhouse, all transfer points to and from conveyors shall be enclosed. Where containment of dust within the enclosure is not successful, then water sprayers shall be provided. Openings for any enclosed structure for the passage of conveyors shall be fitted with flexible seals.		



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures	Mitigation Measures Implemented?^
				Timing of completion of measures	
			Storage piles and bins	Within Concrete	N/A
			Where practicable, free falling transfer points from conveyors to stockpiles shall be fitted with flexible curtains or be enclosed with chutes designed to minimize the drop height. Water sprays shall also be used where required.	Batching Plant / Duration of the construction phase	
			 The surface of all surge piles and stockpiles of blasted rocks or aggregates shall be kept sufficiently wet by water spraying wherever practicable; 		
			 All open stockpiles for aggregates of size in excess of 5 mm shall be kept sufficiently wet by water spraying where practicable; or 		
			• The stockpiles of aggregates 5 mm in size or less shall be enclosed on 3 sides or suitably located to minimize wind-whipping. Save for fluctuations in stock or production, the average stockpile shall stay within the enclosure walls and in no case the height of the stockpile shall exceed twice the height of the enclosure walls.		
			 Scattered piles gathered beneath belt conveyors, inside and around enclosures shall be cleared regularly. 		
			Rock drilling equipment	Within Concrete	N/A
			 Appropriate dust control equipment such as a dust extraction and collection system shall be used during rock drilling activities. 	Batching Plant / Duration of the construction phase	
			Hazard to Human Life – Construction Phase		
Table 6.40	3.2	-	■ Precautionary measures should be established to request barges to move away during typhoons.	Construction Site / Construction Period	I
Table 6.40	3.2	-	 An appropriate marine traffic management system should be established to minimize risk of ship collision. 	Construction Site / Construction Period	1
Table 6.40	3.2	-	 Location of all existing hydrant networks should be clearly identified prior to any construction works. 	Construction Site / Construction Period	1
			Noise Impact – Construction Phase		
7.5.6	4.3	-	Good Site Practice Good site practice and noise management can significantly reduce the impact of construction site activities on nearby NSRs. The following package of measures should be followed during each phase of construction:	Within the Project site / During construction phase / Prior to	I
			 only well-maintained plant to be operated on-site and plant should be serviced regularly during the construction works; 	commencement of operation	
			 machines and plant that may be in intermittent use to be shut down between work periods or should be throttled down to a minimum; 		



-	 plant known to emit noise strongly in one direction, should, where possible, be orientated to direct noise away from the NSRs; mobile plant should be sited as far away from NSRs as possible; and material stockpiles and other structures to be effectively utilised, where practicable, to screen noise from on-site construction activities. Adoption of QPME QPME should be adopted as far as applicable. 	Within the Project site / During construction	I
-	 material stockpiles and other structures to be effectively utilised, where practicable, to screen noise from on-site construction activities. Adoption of QPME 	Within the Project site / During construction	I
-	on-site construction activities. Adoption of QPME	Within the Project site / During construction	I
-	•	During construction	I
		phase / Prior to commencement of operation	
-	 Use of Movable Noise Barriers Movable noise barriers should be placed along the active works area and mobile plants to block the direct line of sight between PME and the NSRs. 	Within the Project site / During construction phase / Prior to commencement of operation	I
-	 Use of Noise Enclosure/ Acoustic Shed Noise enclosure or acoustic shed should be used to cover stationary PME such as air compressor and generator. 	Within the Project site / During construction phase / Prior to commencement of operation	I
	-	 Noise enclosure or acoustic shed should be used to cover stationary PME such as air compressor and generator. 	 Use of Noise Enclosure/ Acoustic Shed Noise enclosure or acoustic shed should be used to cover stationary PME such as air compressor and generator. Within the Project site / During construction phase / Prior to commencement of



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^
8.8.1.2 and	5.1	2.26	Marine Construction Activities	Within construction	I
8.8.1.3			General Measures to be Applied to All Works Areas	site / Duration of the	
			 Barges or hoppers shall not be filled to a level which will cause overflow of materials or pollution of water during loading or transportation; 	construction phase	
			 Use of Lean Material Overboard (LMOB) systems shall be prohibited; 		
			 Excess materials shall be cleaned from the decks and exposed fittings of barges and hopper dredgers before the vessels are moved; 		
			 Plants should not be operated with leaking pipes and any pipe leakages shall be repaired quickly; 		
			 Adequate freeboard shall be maintained on barges to reduce the likelihood of decks being washed by wave action; 		
			 All vessels shall be sized such that adequate clearance is maintained between vessels and the sea bed at all states of the tide to ensure that undue turbidity is not generated by turbulence from vessel movement or propeller wash; 		
			 The works shall not cause foam, oil, grease, litter or other objectionable matter to be present in the water within and adjacent to the works site; and 		
			For ground improvement activities including DCM, the wash water from cleaning of the drilling shaft should be appropriately treated before discharge. The Contractor should ensure the waste water meets the WPCO/TM requirements before discharge. No direct discharge of contaminated water is permitted.		
			Specific Measures to be Applied to All Works Areas	Within construction	
			 The daily maximum production rates shall not exceed those assumed in the water quality assessment in the EIA report; 	site / Duration of the construction phase	I
			 A maximum of 10 % fines content to be adopted for sand blanket and 20 % fines content for marine filling below +2.5 mPD prior to substantial completion of seawall (until end of Year 2017) shall be specified in the works contract document; 	_	
			 An advance seawall of at least 200m to be constructed (comprising either rows of contiguous permanent steel cells completed above high tide mark or partially completed seawalls with rock core to high tide mark and filter layer on the inner side) prior to commencement of marine filling activities; 		I
			 Closed grab dredger shall be used to excavate marine sediment; 		N/A
			 Silt curtains surrounding the closed grab dredger shall be deployed in accordance with the Silt Curtain Deployment Plan; and 		*(The arrangement silt curtain has beer modified. The detai can be referred to S Curtain Deploymen Plan)
			The Silt Curtain Deployment Plan shall be implemented.	-	1



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^
			Specific Measures to be Applied to Land Formation Activities prior to Commencement of Marine Filling Works Double layer 'Type III' silt curtains to be applied around the active eastern works areas prior to commencement of sand blanket laying activities. The silt curtains shall be configured to minimise SS release during ebb tides. A silt curtain efficiency test shall be conducted to validate the performance of the silt curtains; Double layer silt curtains to enclose WSRs C7a and silt screens installed at the intake points for both WSR C7a and C8 prior to commencement of construction; and	Within construction site / Duration of the construction phase	N/A *(The arrangement of silt curtain has been modified. The details can be referred to Silt Curtain Deployment Plan) For C7a, I For C8, I *(The requirement of silt curtain / screen has been modified. The details can be referred to Silt Curtain Deployment Plan)
			■ The silt curtains and silt screens should be regularly checked and maintained.	-	I
			Specific Measures to be Applied to Land Formation Activities during Marine Filling Works Double layer 'Type II' or 'Type III' silt curtains to be applied around the eastern openings between partially completed seawalls prior to commencement of marine filling activities. The silt curtains shall be configured to minimise SS release during ebb tides;	Within construction site / Duration of the construction phase	t (The arrangement of silt curtain has been modified. The details can be referred to Silt Curtain Deployment Plan)
			 Double layer silt curtains to be applied at the south-western opening prior to commencement of marine filling activities; 		N/A *(The arrangement of silt curtain has been modified. The details can be referred to Silt Curtain Deployment Plan)
			 Double layer silt curtain to enclose WSR C7a and silt screens installed at the intake points for both WSR C7a and C8 prior to commencement of marine filling activities; and 		N/A *(The requirement of silt curtain / screen has been modified. The details can be referred to Silt Curtain Deployment Plan)
			The silt curtains and silt screens should be regularly checked and maintained.		1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion	Mitigation Measures Implemented?
				of measures	
			Specific Measures to be Applied to the Field Joint Excavation Works for the Submarine Cable Diversion	Within construction	N/A
			 Only closed grabs designed and maintained to avoid spillage shall be used and should seal tightly when operated. Excavated materials shall be disposed at designated marine disposal area in accordance with the Dumping at Sea Ordinance (DASO) permit conditions; and 	site / Duration of the construction phase	
			 Silt curtains surrounding the closed grab dredger to be deployed as a precautionary measure. 		
8.8.1.4	5.1	-	Modification of the Existing Seawall	At the existing northern seawall / Duration of the construction phase	N/A
			• Silt curtains shall be deployed around the seawall modification activities to completely enclose the active works areas, and care should be taken to avoid splashing of rockfill / rock armour into the surrounding marine environment. For the connecting sections with the existing outfalls, works for these connection areas should be undertaken during the dry season in order that individual drainage culvert cells may be isolated for interconnection works.		
8.8.1.5	5.1	Construction of New Stormwater Outfalls and Modifications to Existing Outfalls During operation of the temporary drainage channel, runoff control measures such as bunding or silt fence shall be provided on both sides of the channel to prevent accumulation and release of SS via the temporary channel. Measures should also be taken to minimise the ingress of site drainage into the culvert excavations.	Construction of New Stormwater Outfalls and Modifications to Existing Outfalls	Within construction	N/A
			site / Duration of the construction phase		
8.8.1.6	5.1	2.27	Piling Activities for Construction of New Runway Approach Lights and HKIAAA Marker Beacons	Within construction	N/A
8.8.1.7			Silt curtains shall be deployed around the piling activities to completely enclose the piling works and care should be taken to avoid spillage of excavated materials into the surrounding marine environment.	site / Duration of the construction phase	
			For construction of the eastern approach lights at the CMPs		
			 Ground improvement via DCM using a close-spaced layout shall be completed prior to commencement of piling works; 		
			 Steel casings shall be installed to enclose the excavation area prior to commencement of excavation; 		
			The excavated materials shall be removed using a closed grab within the steel casings;		
			No discharge of the cement mixed materials into the marine environment will be allowed; and		
			 Excavated materials shall be treated and reused on-site. 		
8.8.1.8	5.1	-	Construction of Site Runoff and Drainage	Within construction	
			The site practices outlined in ProPECC Note PN 1/94 should be followed as far as practicable in order to minimise surface runoff and the chance of erosion. The following measures are recommended:	site / Duration of the construction phase	
			• Install perimeter cut-off drains to direct off-site water around the site and implement internal drainage, erosion and sedimentation control facilities. Channels, earth bunds or sand bag barriers should be provided on site to direct storm water to silt removal facilities. The design of the temporary on-site	-	I



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^
			drainage system should be undertaken by the Contractors prior to the commencement of construction (for works areas located on the existing Airport island) or as soon as the new land is completed (for works areas located on the new landform);		
			Sand/silt removal facilities such as sand/silt traps and sediment basins should be provided to remove sand/silt particles from runoff to meet the requirements of the TM-DSS standards under the WPCO. The design of efficient silt removal facilities should make reference to the guidelines in Appendix A1 of ProPECC Note PN 1/94. Sizes may vary depending upon the flow rate. The detailed design of the sand/silt traps should be undertaken by the Contractors prior to the commencement of construction;	_	ı
			 All drainage facilities and erosion and sediment control structures should be regularly inspected and maintained to ensure proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit should be regularly removed, at the onset of and after each rainstorm to ensure that these facilities are functioning properly; 	_	1
			 Measures should be taken to minimize the ingress of site drainage into excavations. If excavation of trenches in wet periods is necessary, they should be dug and backfilled in short sections wherever practicable. Water pumped out from foundation excavations should be discharged into storm drains via silt removal facilities; 	_	1
			■ In the event that contaminated groundwater is identified at excavation areas, this should be treated onsite using a suitable wastewater treatment process. The effluent should be treated according to the requirements of the TM-DSS standards under the WPCO prior to discharge to foul sewers or collected for proper disposal off-site. No direct discharge of contaminated groundwater is permitted; and	_	N/A
			• All vehicles and plant should be cleaned before leaving a construction site to ensure no earth, mud, debris and the like is deposited by them on roads. An adequately designed and sited wheel washing facility should be provided at construction site exits. Wash-water should have sand and silt settled out and removed regularly to ensure the continued efficiency of the process. The section of access road leading to, and exiting from, the wheel-wash bay to the public road should be paved with sufficient backfall toward the wheel-wash bay to prevent vehicle tracking of soil and silty water to public roads and drains. All washwater should be treated according to the requirements of the TM-DSS standards under the WPCO prior to discharge.		I
8.8.1.9	5.1	-	Sewage Effluent from Construction Workforce	Within construction	I
			Temporary sanitary facilities, such as portable chemical toilets, should be employed on-site where necessary to handle sewage from the workforce. A licensed contractor should be employed to provide appropriate and adequate portable toilets and be responsible for appropriate disposal and maintenance.	site / During construction phase	
8.8.1.10			General Construction Activities	Within construction	I
8.8.1.11			 Construction solid waste, debris and refuse generated on-site should be collected, handled and disposed of properly to avoid entering any nearby storm water drain. Stockpiles of cement and other construction materials should be kept covered when not being used; and 	site / During construction phase	



EIA Ref.	EM&A Ref.	EP Condition		Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^
			• Oils and fuels should only be stored in designated areas which have pollution prevention facilities. To prevent spillage of fuels and solvents to any nearby storm water drain, all fuel tanks and storage areas should be provided with locks and be sited on sealed areas, within bunds of a capacity equal to 110% of the storage capacity of the largest tank. The bund should be drained of rainwater after a rain event.		
8.8.1.12	5.1	2.28	Drilling Activities for the Submarine Aviation Fuel Pipelines	Within construction	1
8.8.1.13			To prevent potential water quality impacts at Sha Chau, the following measures shall be applied:	site / During construction phase	
			 A 'zero-discharge' policy shall be applied for all activities to be conducted at Sha Chau; 		
			 No bulk storage of chemicals shall be permitted; and 		
			 A containment pit shall be constructed around the drill holes. This containment pit shall be lined with impermeable lining and bunded on the outside to prevent inflow from off-site areas. 		
			At the airport island side of the drilling works, the following measures shall be applied for treatment of wastewater:	Within construction site / During construction phase	I
			 During pipe cleaning, appropriate desilting or sedimentation device should be provided on site for treatment before discharge. The Contractor should ensure discharge water from the sedimentation tank meet the WPCO/TM requirements before discharge; and 		
			 Drilling fluid used in drilling activities should be reconditioned and reused as far as possible. Temporary enclosed storage locations should be provided on-site for any unused chemicals that needs to be transported away after all the related construction activities are completed. The requirements in ProPECC Note PN 1/94 should be adhered to in the handling and disposal of bentonite slurries. 		
			Waste Management Implication – Construction Phase		
10.5.1.1	7.1	-	Opportunities to minimise waste generation and maximise the reuse of waste materials generated by the project have been incorporated where possible into the planning, design and construction stages, and the following measures have been recommended:		
			• The relevant construction methods (particularly for the tunnel works) and construction programme have been carefully planned and developed to minimise the extent of excavation and to maximise the on-site reuse of inert C&D materials generated by the project as far as practicable. Temporary stockpiling areas will also be provided to facilitate on-site reuse of inert C&D materials;	Project Site Area / During design and construction phase	1
			 Priority should be given to collect and reuse suitable inert C&D materials generated from other concurrent projects and the Government's PFRF as fill materials for the proposed land formation works; 	•	I
			 Only non-dredged ground improvement methods should be adopted in order to completely avoid the need for dredging and disposal of marine sediment for the proposed land formation work; 	-	I
			 Excavation work for constructing the APM tunnels, BHS tunnels and airside tunnels will not be down to the CMPs beneath the fill materials in order to avoid excavating any sediments; and 	-	1



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?
			■ For the marine sediments expected to be excavated from the piling works of TRC, APM & BHS tunnels, airside tunnels and other facilities on the proposed land formation area, piling work of marine sections of the approach lights and HKIAAA beacons, basement works for some of T2 expansion area and excavation works for the proposed APM depot should be treated and reused on-site as backfilling materials, although required treatment level / detail and the specific re-use mode are under development.		I
10.5.1.1	7.1	1 -	The following good site practices should be performed during the construction activities include:	Project Site Area /	ı
			 Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site; 	Construction Phase	
			 Training of site personnel in proper waste management and chemical waste handling procedures; 		
			 Provision of sufficient waste disposal points and regular collection for disposal; 		
			 Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks by tarpaulin/ similar material or by transporting wastes in enclosed containers. The cover should be extended over the edges of the sides and tailboards; 		
			 Stockpiles of C&D materials should be kept wet or covered by impervious sheets to avoid wind-blown dust; 		
			 All dusty materials including C&D materials should be sprayed with water immediately prior to any loading transfer operation so as to keep the dusty material wet during material handling at the barging points/ stockpile areas; 		
			 C&D materials to be delivered to and from the project site by barges or by trucks should be kept wet or covered to avoid wind-blown dust; 		
			• The speed of the trucks including dump trucks carrying C&D or waste materials within the site should be controlled to about 10 km/hour in order to reduce the adverse dust impact and secure the safe movement around the site; and		
			To avoid or minimise dust emission during transport of C&D or waste materials within the site, each and every main temporary access should be paved with concrete, bituminous hardcore materials or metal plates and kept clear of dusty materials. Unpaved parts of the road should be sprayed with water or a dust suppression chemical so as to keep the entire road surface wet.		
10.5.1.3	7.1	-	The following practices should be performed to achieve waste reduction include:	Project Site Area / Construction Phase	I
			 Use of steel or aluminium formworks and falseworks for temporary works as far as practicable; 		
			 Adoption of repetitive design to allow reuse of formworks as far as practicable; 		
			 Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal; 		



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^
					•
			 Encourage collection of aluminium cans, PET bottles and paper by providing separate labelled bins to enable these wastes to be segregated from other general refuse generated by the work force; 		
			 Any unused chemicals or those with remaining functional capacity should be collected for reused as far as practicable; 		
			 Proper storage and site practices to minimise the potential for damage or contamination of construction materials; and 		
			 Plan and stock construction materials carefully to minimise amount of waste generated and avoid unnecessary generation of waste. 		
10.5.1.5	7.1		 Inert and non-inert C&D materials should be handled and stored separately to avoid mixing the two types of materials. 	Project Site Area / Construction Phase	1
10.5.1.5	7.1	-	 Any recyclable materials should be segregated from the non-inert C&D materials for collection by reputable licensed recyclers whereas the non-recyclable waste materials should be disposed of at the designated landfill site by a reputable licensed waste collector. 	Project Site Area / Construction Phase	I
10.5.1.6	7.1	-	 A trip-ticket system promulgated shall be developed in order to monitor the off-site delivery of surplus inert C&D materials that could not be reused on-site for the proposed land formation work at the PFRF and to control fly tipping. 	Project Site Area / Construction Phase	I
10.5.1.6	7.1	2.32	 The Contractor should prepare and implement a Waste Management Plan detailing various waste arising and waste management practices. 	Construction Phase	1
10.5.1.16	7.1	-	The following mitigation measures are recommended during excavation and treatment of the sediments: On-site remediation should be carried out in an enclosed area in order to minimise odour/dust emissions;	Project Site Area / Construction Phase	I
			 The loading, unloading, handling, transfer or storage of treated and untreated sediment should be carried out in such a manner to prevent or minimise dust emissions; 		I
			 All practical measures, including but not limited to speed control for vehicles, should be taken to minimise dust emission; 		I
			 Good housekeeping should be maintained at all times at the sediment treatment facility and storage area; 		I
			■ Treated and untreated sediment should be clearly separated and stored separately; and	_	I
			 Surface runoff from the enclosed area should be properly collected and stored separately, and then properly treated to levels in compliance with the relevant effluent standards as required by the Water Pollution Control Ordinance before final discharge. 		I
10.5.1.18	7.1	-	The marine sediments to be removed from the cable field joint area would be disposed of at the designated disposal sites to be allocated by the MFC. The following mitigation measures should be strictly	Project Site Area / Construction Phase	N/A



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures	Mitigation Measures Implemented?^
				Timing of completion of measures	
			followed to minimise potential impacts on water quality during transportation of the sediments requiring Type 1 disposal:		
			 Bottom opening of barges shall be fitted with tight fitting seals to prevent leakage of material; 		
			 Monitoring of the barge loading shall be conducted to ensure that loss of material does not take place during transportation. Transport barges or vessels shall be equipped with automatic self-monitoring devices as specified by EPD; and 		
			 Barges or hopper barges shall not be filled to a level that would cause the overflow of materials or sediment laden water during loading or transportation. 		
10.5.1.19	7.1	-	Contractor should register with the EPD as a chemical waste producer and to follow the relevant guidelines. The following measures should be implemented:	Project Site Area / Construction Phase	1
			 Good quality containers compatible with the chemical wastes should be used; 		
			 Incompatible chemicals should be stored separately; 		
			 Appropriate labels must be securely attached on each chemical waste container indicating the corresponding chemical characteristics of the chemical waste, such as explosive, flammable, oxidizing, irritant, toxic, harmful, corrosive, etc.; and 		
			• The contractor will use a licensed collector to transport and dispose of the chemical wastes at the approved Chemical Waste Treatment Centre or other licensed recycling facilities, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.		
10.5.1.20	7.1	-	• General refuse should be stored in enclosed bins or compaction units separated from inert C&D material. A reputable waste collector should be employed by the contractor to remove general refuse from the site for disposal at designated landfill sites. An enclosed and covered area should be provided to reduce the occurrence of 'wind blown' light material.	Project Site Area / Construction Phase	I
10.5.1.21	7.1	-	The construction contractors will be required to regularly check and clean any refuse trapped or accumulated along the newly constructed seawall. Such refuse will then be stored and disposed of together with the general refuse.	Project Site Area / Construction Phase	1
			Land Contamination – Construction Phase		
11.10.1.2	8.1	2.32	For areas inaccessible during site reconnaissance survey	Project Site Area	
to 11.10.1.3			• Further site reconnaissance would be conducted once the areas are accessible in order to identify any land contamination concern for the areas.	inaccessible during site reconnaissance / Prior to Construction Phase	I
			 Subject to further site reconnaissance findings, a supplementary Contamination Assessment Plan (CAP) for additional site investigation (SI) (if necessary) may be prepared and submitted to EPD for endorsement prior to the commencement of SI at these areas. 	_	ı



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^	
			• After completion of SI, the Contamination Assessment Report (CAR) will be prepared and submitted to EPD for approval prior to start of the proposed construction works at the golf course, the underground and above-ground fuel storage tank areas, emergency power generation units, airside petrol filling station and fuel tank room.		I*(CAR for golf course)	
			 Should remediation be required, Remediation Action Plan (RAP) and Remediation Report (RR) will be prepared for EPD's approval prior to commencement of the proposed remediation and any construction works respectively. 		N/A	
11.8.1.2	8.1	-	If contaminated soil is identified, the following mitigation measures are for the excavation and transportation of contaminated materials (if any):	Project Site Area / Construction Phase	N/A	
			 To minimize the incidents of construction workers coming in contact with any contaminated materials, bulk earth-moving excavation equipment should be employed; 			
			 Contact with contaminated materials can be minimised by wearing appropriate clothing and personal protective equipment such as gloves and masks (especially when working directly with contaminated material), provision of washing facilities and prohibition of smoking and eating on site; 			
			 Stockpiling of contaminated excavated materials on site should be avoided as far as possible; 			
			 The use of any contaminated soil for landscaping purpose should be avoided unless pre-treatment was carried out; 			
			 Vehicles containing any excavated materials should be suitably covered to reduce dust emissions and/or release of contaminated wastewater; 			
			 Truck bodies and tailgates should be sealed to prevent any discharge; 			
			 Only licensed waste haulers should be used to collect and transport contaminated material to treatment/disposal site and should be equipped with tracking system to avoid fly tipping; 			
			 Speed control for trucks carrying contaminated materials should be exercised. 8km/h is the recommended speed limit; 			
			 Strictly observe all relevant regulations in relation to waste handling, such as Waste Disposal Ordinance (Cap 354), Waste Disposal (Chemical Waste) (General) Regulation (Cap 354) and obtain all necessary permits where required; and 			
			 Maintain records of waste generation and disposal quantities and disposal arrangements. 			
			Terrestrial Ecological – Construction Phase			
12.10.1.1	9.2	2.14	Pre-construction Egretry Survey	Breeding season (April	I	
			 Conduct ecological survey for Sha Chau egretry to update the latest boundary of the egretry. 	- July) prior to commencement of HDD drilling works at HKIA		



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?
12.7.2.3 and 12.7.2.6	9.1	2.30	Avoidance and Minimisation of Direct Impact to Egretry The daylighting location will avoid direct encroachment to the Sheung Sha Chau egretry. The daylighting location and mooring of flat top barge, if required, will be kept away from the egretry;	During construction phase at Sheung Sha Chau Island	I
			 In any event, controls such as demarcation of construction site boundary and confining the lighting within the site will be practised to minimise disturbance to off-site habitat at Sheung Sha Chau Island; and 		
			■ The containment pit at the daylighting location shall be covered or camouflaged.		
12.7.2.5	9.1	2.30	Preservation of Nesting Vegetation ■ The proposed daylighting location and the arrangement of connecting pipeline will avoid the need of tree cutting, therefore the trees that are used by ardeids for nesting will be preserved. Draw ph		1
12.7.2.4 and 12.7.2.6	9.1	2.30	 Timing the Pipe Connection Works outside Ardeid's Breeding Season All HDD and related construction works on Sheung Sha Chau Island will be scheduled outside the ardeids' breeding season (between April and July). No night-time construction work will be allowed on Sheung Sha Chau Island during all seasons. 	During construction phase at Sheung Sha Chau Island	I
12.10.1.1	9.3	-	Ecological Monitoring During the HDD construction works period from August to March, ecological monitoring will be undertaken monthly at the HDD daylighting location on Sheung Sha Chau Island to identify and evaluate any impacts with appropriate actions taken as required to address and minimise any adverse impact found.	at Sheung Sha Chau Island	I
			Marine Ecological Impact – Pre-construction Phase		
13.11.4.1	10.2.2	-	■ Pre-construction phase Coral Dive Survey.	HKIAAA artificial seawall	I
			Marine Ecological Impact – Construction Phase		
13.11.1.3 to 13.11.1.6	-	-	Minimisation of Land Formation Area • Minimise the overall size of the land formation needed for the additional facilities to minimise the overall loss of habitat for marine resources, especially the CWD population. Land form footprint / detailed of to complete the complete to construct the construct to complete the construct the cons		I
13.11.1.7 to 13.11.1.10	-	2.31	Use of Construction Methods with Minimal Risk/Disturbance Use of non-dredge method for the main land formation and ancillary works including the diversion of the aviation fuel pipeline to the AFRF;	During construction phase at marine works area	1
			 Use of Deep Cement Mixing (DCM) method instead of conventional seabed dredging for the land formation works to reduce the risk of negative impacts through the elevation of suspended solids and contaminants on CWDs, fisheries and the marine environment; 	•	I



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^
			 Use of bored piling in short duration to form the new approach lights and marker beacons for the new runway; 		N/A
			 Avoid bored piling during CWD peak calving season (Mar to Jun); 	-	I
			Prohibition of underwater percussive piling; and	-	I
			 Use of horizontal directional drilling (HDD) method and water jetting methods for placement of submarine cables and pipelines to minimise the disturbance to the CWDs and other marine ecological resources. 	-	I
13.11.2.1	-	-	Mitigation for Indirect Disturbance due to Deterioration of Water Quality	All works area during	
to 13.11.2.7			 Water quality mitigation measures during construction phases include consideration of alternative construction methods, deployment of silt curtain and good site practices; 	the construction phase	1
			 Alternative construction methods including use of non-dredge methods for ground improvement (e.g. Deep Cement Mixing (DCM), prefabricated vertical drains (PVD), sand compaction piles, steel cells, stone columns and vertical sand drains); 	-	I
			 Use of bored piling in short duration to form the new approach lights and marker beacons for the new runway; and 	-	N/A
			Use of horizontal directional drilling (HDD) method and water jetting methods for placement of undersea cables and pipelines to minimise the disturbance to the CWDs and other marine ecological resources.		I
13.11.1.12	-	-	Strict Enforcement of No-Dumping Policy	All works area during	1
			 A policy prohibiting dumping of wastes, chemicals, oil, trash, plastic, or any other substance that would potentially be harmful to dolphins and/or their habitat in the work area; 	the construction phase	
			 Mandatory educational programme of the no-dumpling policy be made available to all construction site personnel for all project-related works; 		
			Fines for infractions should be implemented; and		
			 Unscheduled, on-site audits shall be implemented. 		
13.11.1.13	-	-	 Good Construction Site Practices Regular inspection of the integrity and effectiveness of all silt curtains and monitoring of effluents to ensure that any discharge meets effluent discharge guidelines; Keep the number of working or stationary vessels present on-site to the minimum anytime; and Unscheduled, on-site audits for all good site practice restrictions should be conducted, and fines or penalties sufficient to be an effective deterrent need to be levied against violators. 	All works area during the construction phase	1
13.11.1.3		-	Minimisation of Land Formation Area	Land formation	<u> </u>
to 13.11.1.6			• Minimise the overall size of the land formation needed for the additional facilities to minimise the overall loss of habitat for marine resources, especially the CWD population.	footprint / during detailed design phase	



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures	Mitigation Measures
				Timing of completion of measures	Implemented?^
				to completion of construction	
13.11.5.4	10.3.1	-	SkyPier High Speed Ferries' Speed Restrictions and Route Diversions	Area between the	I
to 13.11.5.13			SkyPier HSFs operating to / from Zhuhai and Macau would divert north of SCLKC Marine Park with a 15 knot speed limit to apply for the part-journeys that cross high CWD abundance grid squares as indicatively shown in Drawing No. MCL/P132/EIA/13-023 of the EIA Report. Both the alignment of the northerly route and the portion of routings to be subject to the speed limit of 15 knots shall be finalised prior to commencement of construction based on the future review of up-to-date CWD abundance and EM&A data and taking reference to changes in total SkyPier HSF numbers; and	footprint and SCLKC Marine Park during construction phase	
			■ A maximum of 10 knots will be enforced through the designated SCLKC Marine Park area at all times.		
			Other mitigation measures	Area between the	1
			 The ET will audit various parameters including actual daily numbers of HSFs, compliance with the 15-knot speed limit in the speed control zone and diversion compliance for SkyPier HSFs operating to / from Zhuhai and Macau; and 	footprint and SCLKC Marine Park during construction phase	
			 The effectiveness of the CWD mitigation measures after implementation of initial six month SkyPier HSF diversion and speed restriction will be reviewed. 		
13.11.5.14	10.3.1	2.31	Dolphin Exclusion Zone	Marine waters around	
to 13.11.5.18			 Establishment of a 24 hr Dolphin Exclusion Zone (DEZ) with a 250 m radius around the land formation works areas; 	land formation works area during construction phase	I
			 A DEZ would also be implemented during ground improvement works (e.g. DCM), water jetting works for submarine cables diversion, open trench dredging at the field joint locations and seawall construction; and 	·	I
			 A DEZ would also be implemented during bored piling work but as a precautionary measure only. 		N/A
13.11.5.19	10.4	2.31	Acoustic Decoupling of Construction Equipment	Around coastal works	1
			 Air compressors and other noisy equipment that must be mounted on steel barges should be acoustically-decoupled to the greatest extent feasible, for instance by using rubber or air-filled tyres; and 	area during construction phase	
			 Specific acoustic decoupling measures shall be specified during the detailed design of the project for use during the land formation works. 		
13.11.5.20	10.6.1	2.29	Spill Response Plan	Construction phase	1
			 An oil and hazardous chemical spill response plan is proposed to be established during the construction phase as a precautionary measure so that appropriate actions to prevent or reduce risks to CWDs can be undertaken in the event of an accidental spillage. 		



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^	
13.11.5.21 to 13.11.5.23	10.6.1	-	Construction Vessel Speed Limits and Skipper Training A speed limit of 10 knots should be strictly observed for construction vessels at areas with the highest CWD densities; and Vessels traversing through the work areas should be required to use predefined and regular routes (which would presumably become known to resident dolphins) to reduce disturbance to cetaceans due to vessel movements. Specific marine routes shall be specified by the Contractor prior to construction commencing.	All areas north and west of Lantau Island during construction phase	I	
			Fisheries Impact – Construction Phase			
14.9.1.2 to 14.9.1.5	-		Minimisation of Land Formation Area Minimise the overall size of the land formation needed for the additional facilities to minimise the overall loss of habitat for fisheries resources.	Land formation footprint / during detailed design phase to completion of construction	I	
14.9.1.6	-	-	Use of Construction Methods with Minimal Risk/Disturbance Use of non-dredge method for the main land formation and ancillary works including the diversion of the aviation fuel pipeline to the AFRF;	During construction phase at marine works area	1	
			 Use of Deep Cement Mixing (DCM) method instead of conventional seabed dredging for the land formation works to reduce the risk of negative impacts through the elevation of suspended solids and contaminants on fisheries and the marine environment; 	-	1	
			 Use of bored piling in short duration to form the new approach lights and marker beacons for the new runway; and 	_	N/A	
			 Use of horizontal directional drilling (HDD) method and water jetting methods for placement of undersea cables and pipelines to minimise the disturbance to fisheries resources. 	_	I	
14.9.1.11	-		Strict Enforcement of No-Dumping Policy • A policy prohibiting dumping of wastes, chemicals, oil, trash, plastic, or any other substance that would potentially be harmful to dolphins and/or their habitat in the work area;	All works area during the construction phase	I	
			 Mandatory educational programme of the no-dumpling policy be made available to all construction site personnel for all project-related works; 			
			■ Fines for infractions should be implemented; and			
			 Unscheduled, on-site audits shall be implemented. 			
14.9.1.12	-		 Good Construction Site Practices Regular inspection of the integrity and effectiveness of all silt curtains and monitoring of effluents to ensure that any discharge meets effluent discharge guidelines; Keep the number of working or stationary vessels present on-site to the minimum anytime; and 	All works area during the construction phase	I	



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^
			 Unscheduled, on-site audits for all good site practice restrictions should be conducted, and fines or penalties sufficient to be an effective deterrent need to be levied against violators. 		
14.9.1.13	-		Mitigation for Indirect Disturbance due to Deterioration of Water Quality	All works area during	
to 14.9.1.18			 Water quality mitigation measures during construction phases include consideration of alternative construction methods, deployment of silt curtain and good site practices; 	the construction phase	I
			Alternative construction methods including use of non-dredge methods for ground improvement (e.g. Deep Cement Mixing (DCM), prefabricated vertical drains (PVD), sand compaction piles, steel cells, stone columns and vertical sand drains);	_	I
			 Use of bored piling in short duration to form the new approach lights and marker beacons for the new runway; and 		N/A
			 Use of horizontal directional drilling (HDD) method and water jetting methods for placement of undersea cables and pipelines to minimise the disturbance to fisheries resources. 		I
			Landscape and Visual Impact – Construction Phase		
Table 15.6	12.3	-	CM1 - The construction area and contractor's temporary works areas should be minimised to avoid impacts on adjacent landscape.	All works areas for duration of works;	I
				Upon handover and completion of works.	
Table 15.6	12.3	-	CM2 - Reduction of construction period to practical minimum.	All works areas for duration of works;	I
				Upon handover and completion of works.	
Table 15.6	12.3	-	CM3 - Phasing of the construction stage to reduce visual impacts during the construction phase.	All works areas for duration of works;	I
				Upon handover and completion of works.	
Table 15.6	12.3	-	CM4 - Construction traffic (land and sea) including construction plants, construction vessels and barges should be kept to a practical minimum.	All works areas for duration of works;	1
				Upon handover and completion of works.	
Table 15.6	12.3	-	CM5 - Erection of decorative mesh screens or construction hoardings around works areas in visually unobtrusive colours.	All works areas for duration of works;	1
				Upon handover and completion of works. –	



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures	Mitigation Measures Implemented?^
				Timing of completion of measures	
				may be disassembled in phases	
Table 15.6	12.3	-	CM6 - Avoidance of excessive height and bulk of site buildings and structures.	New passenger concourse, terminal 2 expansion and other proposed airport related buildings and structures under the project; Upon handover and completion of works.	N/A
Table 15.6	12.3	-	CM7 - Control of night-time lighting by hooding all lights and through minimisation of night working periods.	All works areas for duration of works;	I
				Upon handover and completion of works. – may be disassembled in phases	
Table 15.6	12.3	-	CM8 - All existing trees shall be carefully protected during construction. Detailed Tree Protection Specification shall be provided in the Contract Specification. Under this specification, the Contractor shall	All existing trees to be retained;	I
			be required to submit, for approval, a detailed working method statement for the protection of trees prior to undertaking any works adjacent to all retained trees, including trees in contractor's works areas.	Upon handover and completion of works.	
Table 15.6	12.3	-	CM9 - Trees unavoidably affected by the works shall be transplanted where practical. A detailed Tree Transplanting Specification shall be provided in the Contract Specification, if applicable. Sufficient time for	All existing trees to be affected by the works;	1
			necessary tree root and crown preparation periods shall be allowed in the project programme.	Upon handover and completion of works.	
Table 15.6	12.3	-	CM10 - Land formation works shall be followed with advanced hydroseeding around taxiways and runways as soon as practical.	All affected existing grass areas around runways and verges/Duration of works;	N/A
				Upon handover and completion of works.	
			Cultural Heritage Impact – Construction Phase		
			Not applicable.		



EIA Ref.	EM&A Ref.	EP Condition	Environmental Protection Measures	Location / Duration of measures Timing of completion of measures	Mitigation Measures Implemented?^
			Health Impact - Aircraft Emissions		
			Not applicable.		
			Health Impact - Aircraft Noise		
	•		Not applicable.		

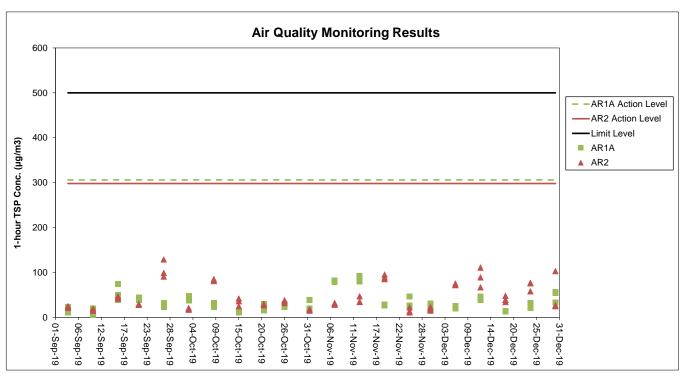
Notes:

I= implemented where applicable;

N/A= not applicable to the construction works implemented during the reporting month. ^ Checked by ET through site inspection and record provided by the Contractor.

Appendix C. Monitoring Results

Air Quality Monitoring Results




^{1.} The key activities of the Project during monitoring included reclamation works and land-side works. Reclamation works included deep cement mixing (DCM) works, marine filling, and seawall construction. Land-side works involved mainly foundation and substructure work for Terminal 2 expansion, modification and tunnel work for Automated People Mover (APM) and Baggage Handling System (BHS), and preparation work for utilities.

2. General weather condition during monitoring ranged from sunny to drizzle. Detailed meteorological conditions can be referred to Table 2.3 of this Report and corresponding Monthly EM&A

^{3.} \overrightarrow{QA} QC requirements as stipulated in the EM&A Manual were carried out during measurement.

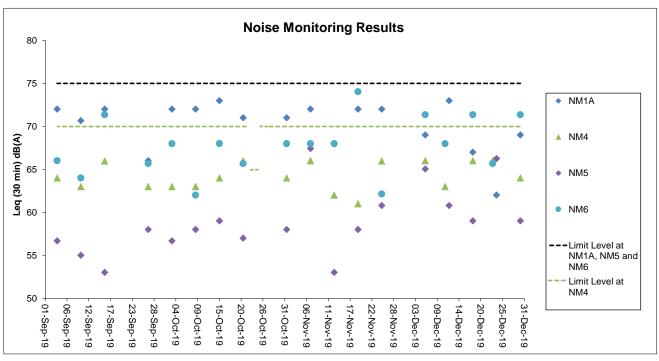
Noise Monitoring Results





- 1. Limit Level at NM4 was reduced to 65 dB(A) during school examination period from 23 to 25 Oct 2019 and from 5 to 11 Dec 2019 (8:30 am to 12:00 pm). Impact noise monitoring at NM4 on 6 and 11 Dec 2019 were conducted after the school examination those days. The corresponding Limit Level for the monitoring sessions was 70 dB(A).
- 2. The key activities of the Project during monitoring included reclamation works and land-side works. Reclamation works included deep cement mixing (DCM) works, marine filling, and seawall construction. Land-side works involved mainly foundation and substructure work for Terminal 2 expansion, modification and tunnel work for Automated People Mover (APM) and Baggage Handling System (BHS), and preparation work for utilities.
- 3. General weather condition during monitoring ranged from sunny to drizzle. Detailed meteorological conditions can be referred to Table 2.6 of this Report and corresponding Monthly EM&A Reports.
- 4. QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.


Mott MooDonald I	Evpansion of Ha	a Kona Internetic	anal Airport into a	Three-Runway System
Mott MacDonald I	Expansion of Ho	ng Kong Internatio	onal Airbort Into a	i nree-Runway System

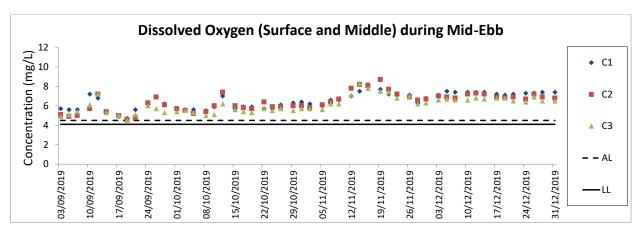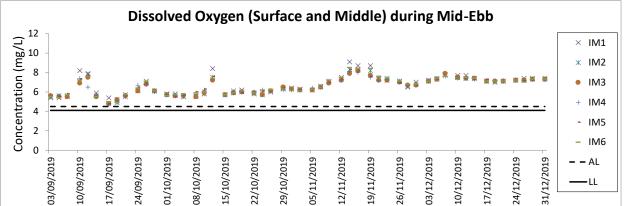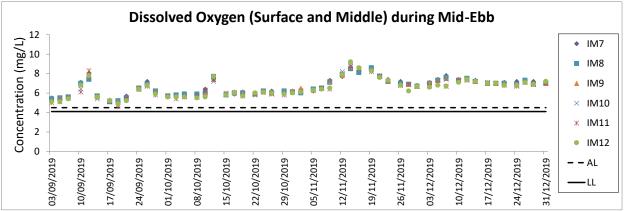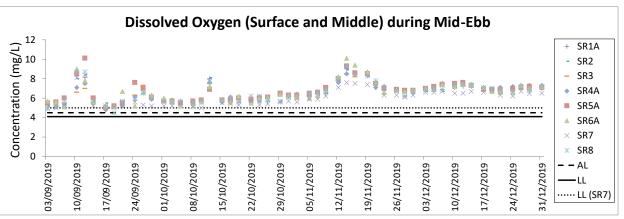Water Quality Monitoring Results













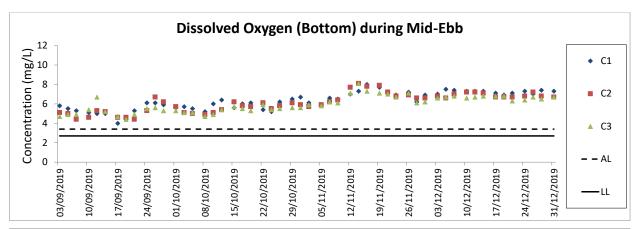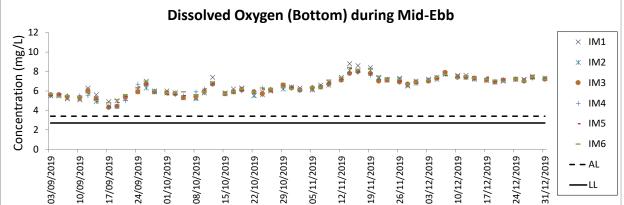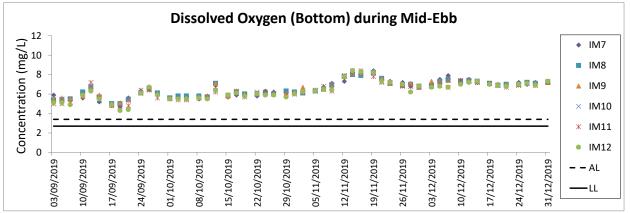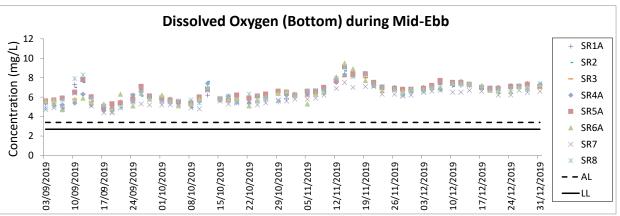- 1. The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.
 QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.













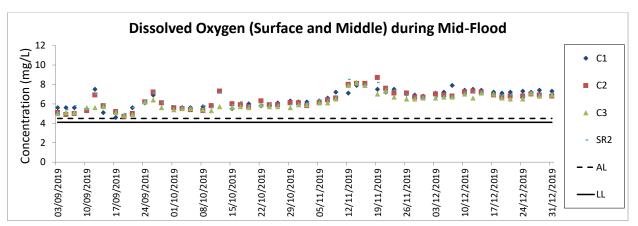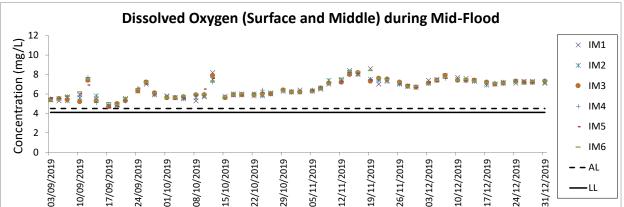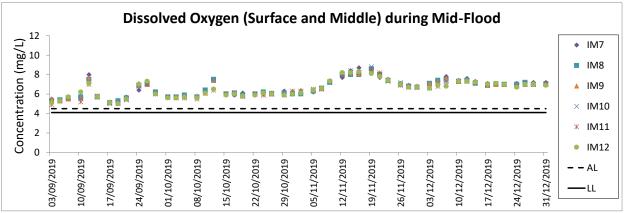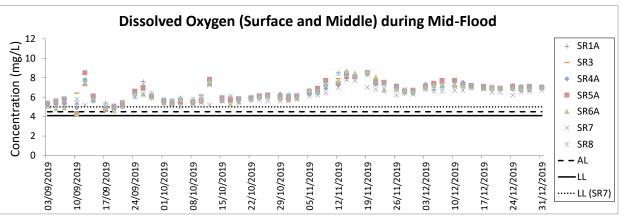- 1. The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.
 QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.













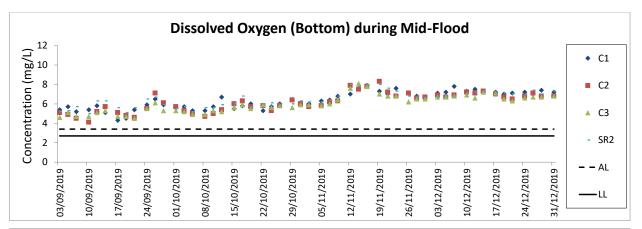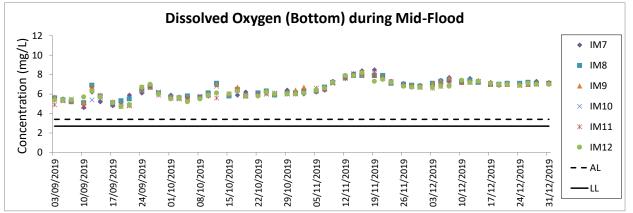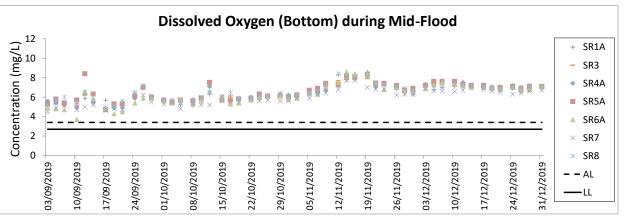- 1. The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.
 QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.












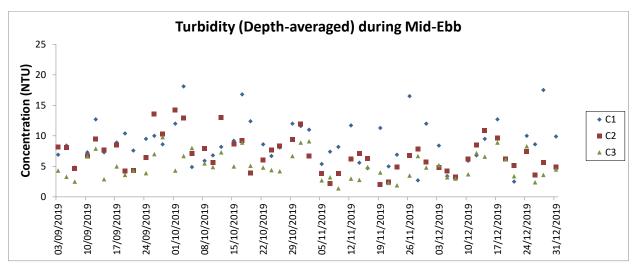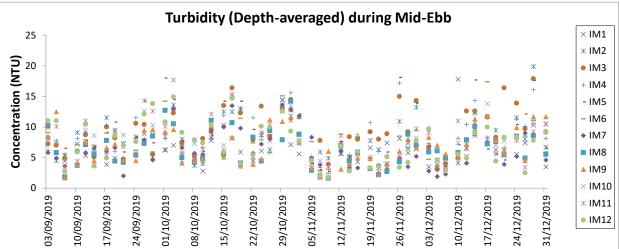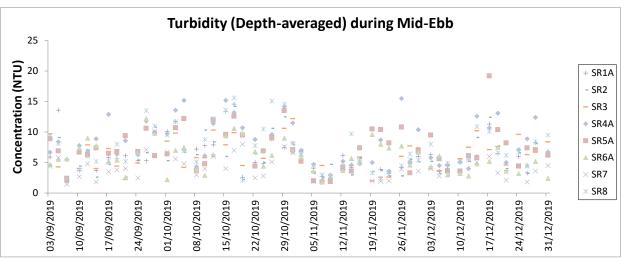- 1. The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.
 QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.










- Notes:

 1. The Action and Limit Levels can be referred to Table 2.8 of this Report.
- The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- 3. General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.

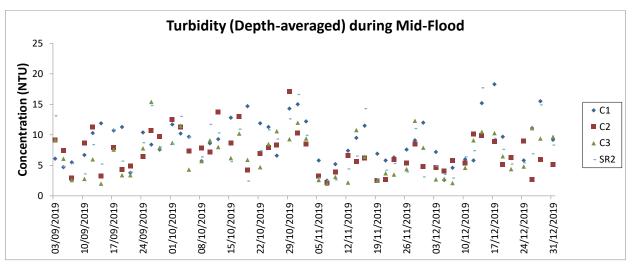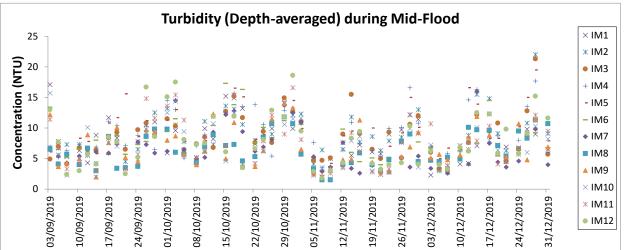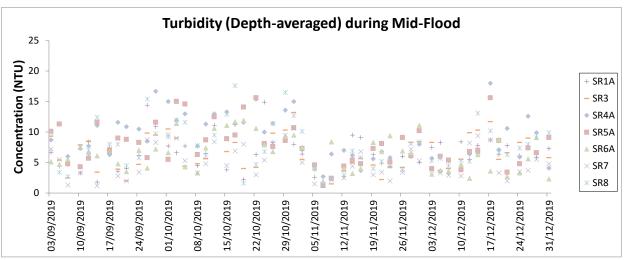 4. QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.










- Notes:

 1. The Action and Limit Levels can be referred to Table 2.8 of this Report.
- The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- 3. General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.

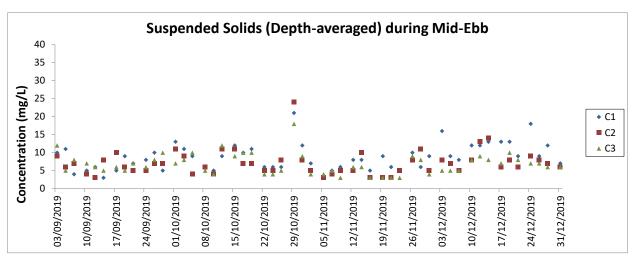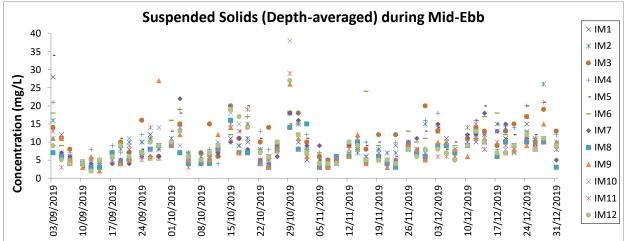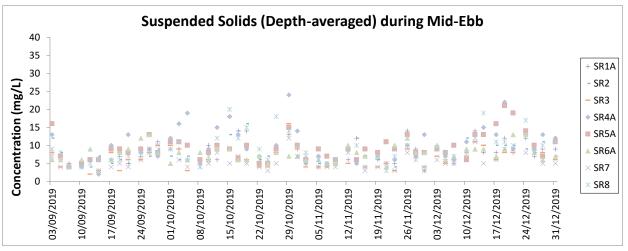
 4. QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.










- The Action and Limit Levels can be referred to Table 2.8 of this Report.
 The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- 3. General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to
- Table 2.11 of this Report and corresponding Monthly EM&A Reports.
 4. QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.

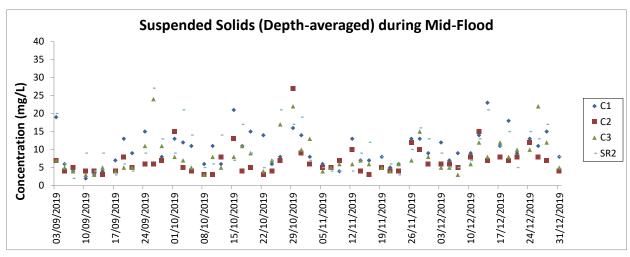


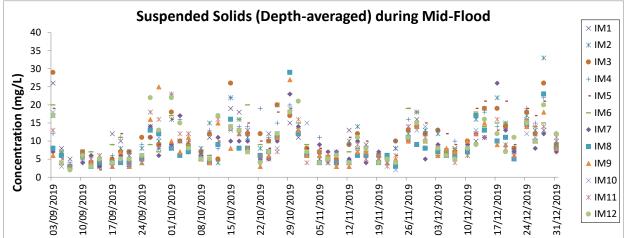


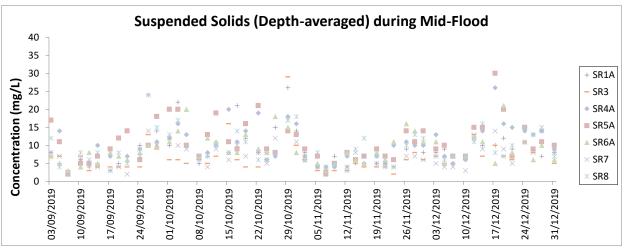


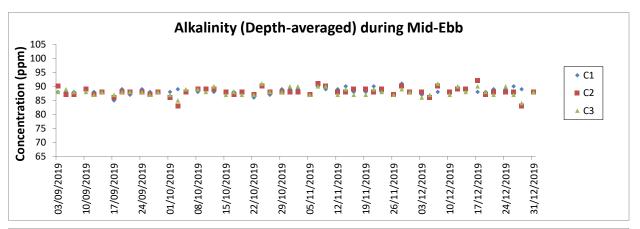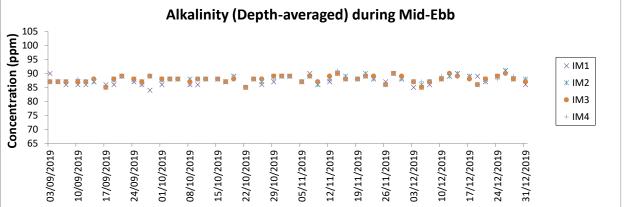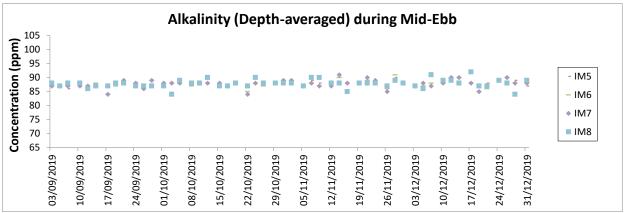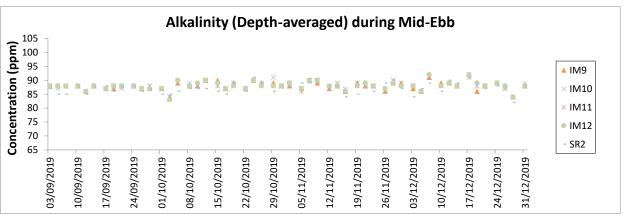- 1. The Action and Limit Levels can be referred to Table 2.8 of this Report.
 2. The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- 3. General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.
 4. QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.











- 1. The Action and Limit Levels can be referred to Table 2.8 of this Report.


 2. The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.


 3. General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.

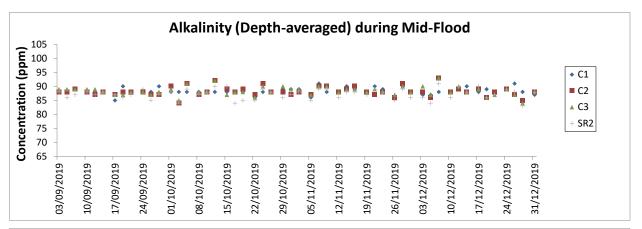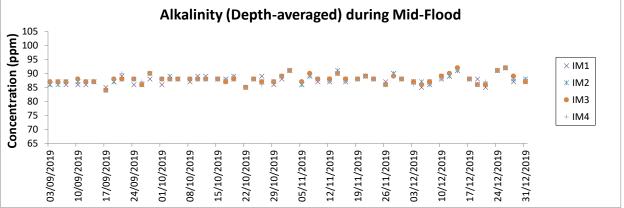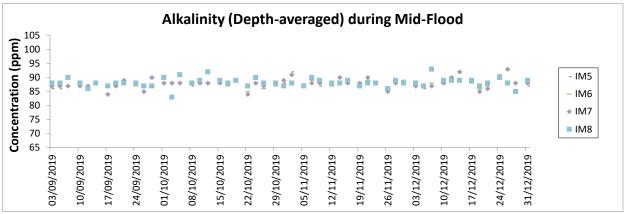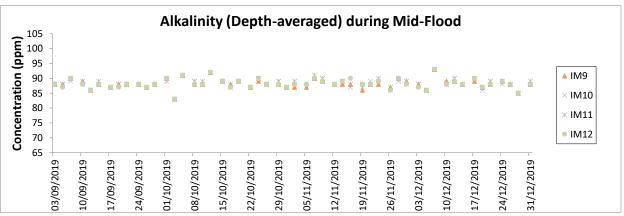 4. QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.













- The Action and Limit Levels can be referred to Table 2.8 of this Report.
 The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- 3. General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.
 4. QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.

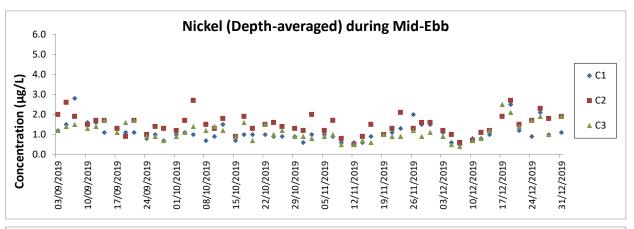


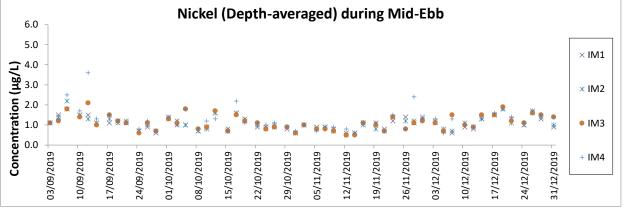


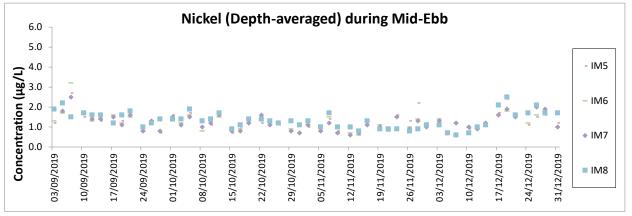


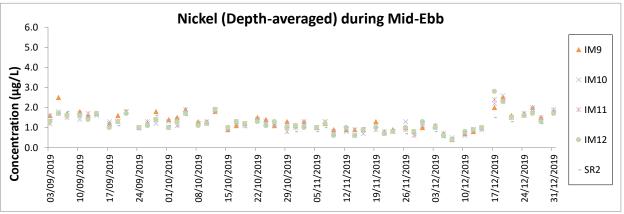


- The Action and Limit Levels can be referred to Table 2.8 of this Report.
- 2. The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- 3. General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.
 4. QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.

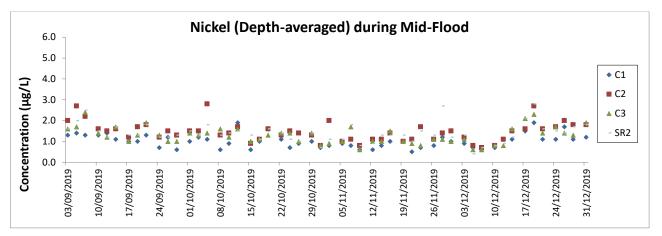

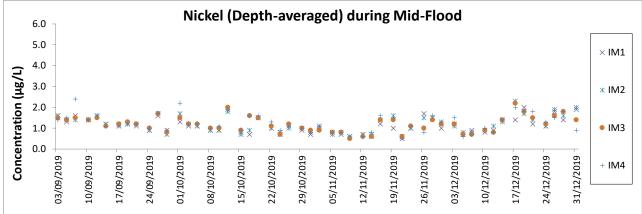

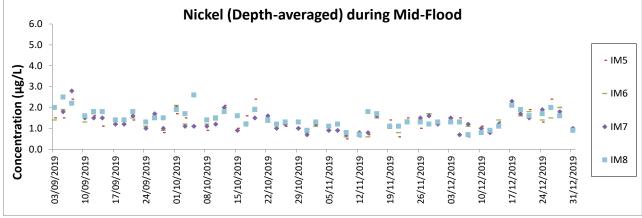

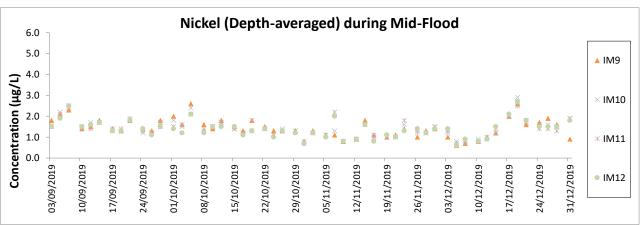

- 1. The Action and Limit Levels can be referred to Table 2.8 of this Report.
- 2. The key marine works activities of the Project during monitoring included deep cement mixing (DCM) works, marine filling, and seawall construction.
- 3. General weather condition during monitoring ranged from sunny to rainy, with sea condition ranged from calm to rough. Detailed meteorological conditions can be referred to Table 2.11 of this Report and corresponding Monthly EM&A Reports.
- Table 2.11 of this Report and corresponding Monthly EM&A Reports.
 4. QA/ QC requirements as stipulated in the EM&A Manual were carried out during measurement.
- 5. All chromium results in the reporting period was below the reporting limit 0.2 µg/L.

Mott MacDonald Expansion of Hong Kong International Airport into a Three-Runway System
Chinese White Dolphin Monitoring Results

CWD Small Vessel Line-transect Survey

Survey Effort Data

DATE	AREA	BEAU	KM SEARCHED	SEASON	VESSEL	TYPE	P/S
2-Oct-19	SWL	2	21.630	AUTUMN	32166	3RS ET	Р
2-Oct-19	SWL	3	32.292	AUTUMN	32166	3RS ET	Р
2-Oct-19	SWL	2	4.878	AUTUMN	32166	3RS ET	S
2-Oct-19	SWL	3	11.810	AUTUMN	32166	3RS ET	S
3-Oct-19	AW	2	3.470	AUTUMN	32166	3RS ET	Р
3-Oct-19	WL	2	17.515	AUTUMN	32166	3RS ET	Р
3-Oct-19	WL	2	9.401	AUTUMN	32166	3RS ET	S
4-Oct-19	SWL	2	49.551	AUTUMN	32166	3RS ET	Р
4-Oct-19	SWL	3	2.100	AUTUMN	32166	3RS ET	Р
4-Oct-19	SWL	2	16.128	AUTUMN	32166	3RS ET	S
4-Oct-19	SWL	3	1.100	AUTUMN	32166	3RS ET	S
10-Oct-19	NWL	2	40.510	AUTUMN	32166	3RS ET	Р
10-Oct-19	NWL	3	21.930	AUTUMN	32166	3RS ET	Р
10-Oct-19	NWL	2	10.970	AUTUMN	32166	3RS ET	S
10-Oct-19	NWL	3	0.900	AUTUMN	32166	3RS ET	S
11-Oct-19	AW	2	4.930	AUTUMN	32166	3RS ET	Р
11-Oct-19	WL	2	19.410	AUTUMN	32166	3RS ET	Р
11-Oct-19	WL	2	10.760	AUTUMN	32166	3RS ET	S
16-Oct-19	NEL	2	15.140	AUTUMN	32166	3RS ET	Р
16-Oct-19	NEL	3	22.770	AUTUMN	32166	3RS ET	Р
16-Oct-19	NEL	2	5.040	AUTUMN	32166	3RS ET	S
16-Oct-19	NEL	3	5.350	AUTUMN	32166	3RS ET	S
17-Oct-19	NEL	2	37.340	AUTUMN	32166	3RS ET	Р
17-Oct-19	NEL	2	10.060	AUTUMN	32166	3RS ET	S
22-Oct-19	NWL	2	41.400	AUTUMN	32166	3RS ET	Р
22-Oct-19	NWL	3	21.600	AUTUMN	32166	3RS ET	Р
22-Oct-19	NWL	2	8.700	AUTUMN	32166	3RS ET	S
22-Oct-19	NWL	3	3.300	AUTUMN	32166	3RS ET	S
7-Nov-19	NEL	2	5.760	AUTUMN	32166	3RS ET	Р
7-Nov-19	NEL	3	27.790	AUTUMN	32166	3RS ET	Р
7-Nov-19	NEL	4	3.700	AUTUMN	32166	3RS ET	Р
7-Nov-19	NEL	2	2.990	AUTUMN	32166	3RS ET	S
7-Nov-19	NEL	3	7.460	AUTUMN	32166	3RS ET	S
8-Nov-19	NEL	2	11.100	AUTUMN	32166	3RS ET	Р
8-Nov-19	NEL	3	25.840	AUTUMN	32166	3RS ET	Р
8-Nov-19	NEL	2	6.500	AUTUMN	32166	3RS ET	S
8-Nov-19	NEL	3	4.160	AUTUMN	32166	3RS ET	S
11-Nov-19	NWL	2	56.549	AUTUMN	32166	3RS ET	Р
11-Nov-19	NWL	3	2.200	AUTUMN	32166	3RS ET	Р
11-Nov-19	NWL	4	2.900	AUTUMN	32166	3RS ET	Р
11-Nov-19	NWL	2	11.051	AUTUMN	32166	3RS ET	S
11-Nov-19	NWL	4	0.900	AUTUMN	32166	3RS ET	S
12-Nov-19	AW	3	4.760	AUTUMN	32166	3RS ET	Р
12-Nov-19	WL	2	3.570	AUTUMN	32166	3RS ET	Р
12-Nov-19	WL	3	14.600	AUTUMN	32166	3RS ET	Р

DATE	AREA	BEAU	KM SEARCHED	SEASON	VESSEL	TYPE	P/S
12-Nov-19	WL	4	2.600	AUTUMN	32166	3RS ET	Р
12-Nov-19	WL	2	2.990	AUTUMN	32166	3RS ET	S
12-Nov-19	WL	3	5.730	AUTUMN	32166	3RS ET	S
12-Nov-19	WL	4	1.300	AUTUMN	32166	3RS ET	S
13-Nov-19	NWL	2	57.200	AUTUMN	32166	3RS ET	Р
13-Nov-19	NWL	3	6.000	AUTUMN	32166	3RS ET	Р
13-Nov-19	NWL	2	11.800	AUTUMN	32166	3RS ET	S
21-Nov-19	SWL	2	5.700	AUTUMN	32166	3RS ET	Р
21-Nov-19	SWL	3	48.558	AUTUMN	32166	3RS ET	Р
21-Nov-19	SWL	2	1.300	AUTUMN	32166	3RS ET	S
21-Nov-19	SWL	3	14.822	AUTUMN	32166	3RS ET	S
22-Nov-19	AW	1	2.900	AUTUMN	32166	3RS ET	Р
22-Nov-19	AW	2	2.070	AUTUMN	32166	3RS ET	Р
22-Nov-19	WL	2	6.843	AUTUMN	32166	3RS ET	Р
22-Nov-19	WL	3	12.828	AUTUMN	32166	3RS ET	Р
22-Nov-19	WL	2	1.987	AUTUMN	32166	3RS ET	S
22-Nov-19	WL	3	7.842	AUTUMN	32166	3RS ET	S
29-Nov-19	SWL	2	22.710	AUTUMN	32166	3RS ET	Р
29-Nov-19	SWL	3	28.090	AUTUMN	32166	3RS ET	Р
29-Nov-19	SWL	4	3.600	AUTUMN	32166	3RS ET	Р
29-Nov-19	SWL	2	9.890	AUTUMN	32166	3RS ET	S
29-Nov-19	SWL	3	6.210	AUTUMN	32166	3RS ET	S
9-Dec-19	AW	3	4.860	WINTER	32166	3RS ET	Р
9-Dec-19	WL	3	21.298	WINTER	32166	3RS ET	Р
9-Dec-19	WL	4	2.800	WINTER	32166	3RS ET	Р
9-Dec-19	WL	3	9.102	WINTER	32166	3RS ET	S
9-Dec-19	WL	4	0.900	WINTER	32166	3RS ET	S
10-Dec-19	SWL	2	30.840	WINTER	32166	3RS ET	Р
10-Dec-19	SWL	3	23.200	WINTER	32166	3RS ET	Р
10-Dec-19	SWL	2	7.990	WINTER	32166	3RS ET	S
10-Dec-19	SWL	3	8.100	WINTER	32166	3RS ET	S
13-Dec-19	NEL	2	1.500	WINTER	32166	3RS ET	Р
13-Dec-19	NEL	3	35.350	WINTER	32166	3RS ET	Р
13-Dec-19	NEL	4	0.400	WINTER	32166	3RS ET	Р
13-Dec-19	NEL	3	10.350	WINTER	32166	3RS ET	S
16-Dec-19	NWL	2	37.711	WINTER	32166	3RS ET	Р
16-Dec-19	NWL	3	25.070	WINTER	32166	3RS ET	Р
16-Dec-19	NWL	2	8.660	WINTER	32166	3RS ET	S
16-Dec-19	NWL	3	2.860	WINTER	32166	3RS ET	S
17-Dec-19	SWL	2	46.934	WINTER	32166	3RS ET	Р
17-Dec-19	SWL	3	8.050	WINTER	32166	3RS ET	Р
17-Dec-19	SWL	2	12.746	WINTER	32166	3RS ET	S
17-Dec-19	SWL	3	3.170	WINTER	32166	3RS ET	S
18-Dec-19	AW	1	4.530	WINTER	32166	3RS ET	Р
18-Dec-19	WL	1	10.510	WINTER	32166	3RS ET	Р
18-Dec-19	WL	2	6.930	WINTER	32166	3RS ET	Р
18-Dec-19	WL	1	4.850	WINTER	32166	3RS ET	S

DATE	AREA	BEAU	KM SEARCHED	SEASON	VESSEL	TYPE	P/S
18-Dec-19	WL	2	4.940	WINTER	32166	3RS ET	S
19-Dec-19	NEL	1	2.700	WINTER	32166	3RS ET	Р
19-Dec-19	NEL	2	15.000	WINTER	32166	3RS ET	Р
19-Dec-19	NEL	3	18.090	WINTER	32166	3RS ET	Р
19-Dec-19	NEL	4	1.670	WINTER	32166	3RS ET	Р
19-Dec-19	NEL	1	1.300	WINTER	32166	3RS ET	S
19-Dec-19	NEL	2	2.700	WINTER	32166	3RS ET	S
19-Dec-19	NEL	3	6.240	WINTER	32166	3RS ET	S
23-Dec-19	NWL	2	1.830	WINTER	32166	3RS ET	Р
23-Dec-19	NWL	3	45.110	WINTER	32166	3RS ET	Р
23-Dec-19	NWL	4	17.460	WINTER	32166	3RS ET	Р
23-Dec-19	NWL	3	7.300	WINTER	32166	3RS ET	S
23-Dec-19	NWL	4	4.600	WINTER	32166	3RS ET	S

CWD Small Vessel Line-transect Survey

Sighting Data

DATE	STG#	TIME	CWD/FP	GP SZ	AREA	BEAU	PSD	EFFORT	TYPE	DEC LAT	DEC LON	SEASON	BOAT ASSOC.	P/S
2-Oct-19	1	1101	FP	2	SWL	3	1	ON	3RS ET	22.1476	113.9274	AUTUMN	NONE	Р
2-Oct-19	2	1114	FP	1	SWL	3	25	ON	3RS ET	22.1706	113.9277	AUTUMN	NONE	Р
2-Oct-19	3	1131	CWD	1	SWL	2	36	ON	3RS ET	22.2055	113.9269	AUTUMN	NONE	Р
3-Oct-19	1	0937	CWD	7	AW	2	165	ON	3RS ET	22.2983	113.8853	AUTUMN	NONE	Р
3-Oct-19	2	1026	CWD	4	WL	2	485	ON	3RS ET	22.2924	113.8612	AUTUMN	NONE	Р
3-Oct-19	3	1110	CWD	2	WL	2	155	ON	3RS ET	22.2605	113.8479	AUTUMN	NONE	Р
3-Oct-19	4	1122	CWD	1	WL	2	127	ON	3RS ET	22.2603	113.8411	AUTUMN	NONE	Р
3-Oct-19	5	1146	CWD	3	WL	2	181	ON	3RS ET	22.2416	113.8434	AUTUMN	NONE	Р
3-Oct-19	6	1157	CWD	4	WL	2	207	ON	3RS ET	22.2416	113.8344	AUTUMN	NONE	Р
3-Oct-19	7	1220	CWD	7	WL	2	382	ON	3RS ET	22.2282	113.8378	AUTUMN	NONE	S
3-Oct-19	8	1308	CWD	14	WL	2	265	ON	3RS ET	22.1960	113.8365	AUTUMN	NONE	Р
4-Oct-19	1	1103	FP	16	SWL	2	112	ON	3RS ET	22.1428	113.9283	AUTUMN	NONE	S
4-Oct-19	2	1154	FP	2	SWL	2	114	ON	3RS ET	22.1899	113.9181	AUTUMN	NONE	Р
4-Oct-19	3	1233	FP	3	SWL	2	65	ON	3RS ET	22.1542	113.9067	AUTUMN	NONE	S
4-Oct-19	4	1242	FP	2	SWL	2	19	ON	3RS ET	22.1568	113.8996	AUTUMN	NONE	S
4-Oct-19	5	1321	CWD	1	SWL	2	296	ON	3RS ET	22.2063	113.8972	AUTUMN	NONE	Р
4-Oct-19	6	1356	FP	2	SWL	2	270	ON	3RS ET	22.1486	113.8921	AUTUMN	NONE	S
4-Oct-19	7	1411	FP	1	SWL	2	223	ON	3RS ET	22.1727	113.8882	AUTUMN	NONE	Р
10-Oct-19	1	1047	CWD	2	NWL	3	16	ON	3RS ET	22.2709	113.8702	AUTUMN	NONE	Р
10-Oct-19	2	1107	CWD	1	NWL	2	100	ON	3RS ET	22.2970	113.8779	AUTUMN	NONE	Р
10-Oct-19	3	1205	CWD	4	NWL	2	112	ON	3RS ET	22.3769	113.8775	AUTUMN	NONE	Р
11-Oct-19	1	1050	CWD	2	WL	2	214	ON	3RS ET	22.2503	113.8411	AUTUMN	NONE	Р
11-Oct-19	2	1114	CWD	1	WL	2	26	ON	3RS ET	22.2414	113.8408	AUTUMN	NONE	Р
11-Nov-19	1	1051	CWD	3	NWL	2	142	ON	3RS ET	22.2844	113.8702	AUTUMN	NONE	Р
11-Nov-19	2	1155	CWD	1	NWL	2	112	ON	3RS ET	22.3605	113.8777	AUTUMN	NONE	Р
11-Nov-19	3	1339	CWD	2	NWL	2	55	ON	3RS ET	22.3884	113.8980	AUTUMN	NONE	Р
12-Nov-19	1	1039	CWD	3	WL	3	20	ON	3RS ET	22.2617	113.8548	AUTUMN	NONE	S
21-Nov-19	1	1113	FP	1	SWL	3	55	ON	3RS ET	22.1514	113.9361	AUTUMN	NONE	Р
21-Nov-19	2	1151	CWD	1	SWL	3	23	ON	3RS ET	22.2056	113.9194	AUTUMN	NONE	S
21-Nov-19	3	1223	FP	1	SWL	3	151	ON	3RS ET	22.1518	113.9175	AUTUMN	NONE	Р
21-Nov-19	4	1503	CWD	4	SWL	3	50	ON	3RS ET	22.1965	113.8686	AUTUMN	NONE	Р

DATE	STG#	TIME	CWD/FP	GP SZ	AREA	BEAU	PSD	EFFORT	TYPE	DEC LAT	DEC LON	SEASON	BOAT ASSOC.	P/S
22-Nov-19	1	1020	CWD	1	WL	2	39	ON	3RS ET	22.2694	113.8571	AUTUMN	NONE	Р
22-Nov-19	2	1100	CWD	4	WL	3	484	ON	3RS ET	22.2498	113.8460	AUTUMN	NONE	Р
22-Nov-19	3	1127	CWD	1	WL	3	988	ON	3RS ET	22.2446	113.8493	AUTUMN	NONE	S
22-Nov-19	4	1145	CWD	3	WL	3	175	ON	3RS ET	22.2377	113.8275	AUTUMN	NONE	S
22-Nov-19	5	1216	CWD	1	WL	3	112	ON	3RS ET	22.2258	113.8375	AUTUMN	NONE	S
22-Nov-19	6	1329	CWD	2	SWL	2	N/A	OFF	3RS ET	22.1948	113.8524	AUTUMN	NONE	N/A
29-Nov-19	1	1321	FP	3	SWL	3	294	ON	3RS ET	22.1638	113.8972	AUTUMN	NONE	Р
9-Dec-19	1	1101	CWD	2	WL	3	438	ON	3RS ET	22.2569	113.8371	WINTER	NONE	S
10-Dec-19	1	1114	FP	2	SWL	3	76	ON	3RS ET	22.1592	113.9281	WINTER	NONE	Р
10-Dec-19	2	1450	CWD	1	SWL	2	216	ON	3RS ET	22.1958	113.8589	WINTER	GILLNETTER	Р
10-Dec-19	3	1526	CWD	3	SWL	2	182	ON	3RS ET	22.1885	113.8492	WINTER	NONE	Р
16-Dec-19	1	1033	CWD	1	NWL	3	107	ON	3RS ET	22.3041	113.8700	WINTER	NONE	Р
16-Dec-19	2	1213	CWD	2	NWL	2	219	ON	3RS ET	22.3934	113.8876	WINTER	NONE	Р
16-Dec-19	3	1227	CWD	3	NWL	2	301	ON	3RS ET	22.3882	113.8871	WINTER	NONE	Р
17-Dec-19	1	1132	FP	1	SWL	2	187	ON	3RS ET	22.1704	113.8785	WINTER	NONE	Р
17-Dec-19	2	1336	FP	2	SWL	2	199	ON	3RS ET	22.1451	113.9083	WINTER	NONE	Р
17-Dec-19	3	1435	FP	2	SWL	2	472	ON	3RS ET	22.1677	113.9269	WINTER	NONE	Р
18-Dec-19	1	0954	CWD	2	WL	1	4	ON	3RS ET	22.3045	113.8613	WINTER	NONE	Р
18-Dec-19	2	1036	CWD	5	WL	2	107	ON	3RS ET	22.2605	113.8468	WINTER	NONE	Р
18-Dec-19	3	1104	CWD	8	WL	1	18	ON	3RS ET	22.2538	113.8347	WINTER	NONE	S
18-Dec-19	4	1153	CWD	1	WL	2	40	ON	3RS ET	22.2232	113.8349	WINTER	NONE	Р
18-Dec-19	5	1212	CWD	2	WL	2	5	ON	3RS ET	22.2182	113.8196	WINTER	NONE	S


Abbreviations: STG# = Sighting Number; GP SZ = Group Size; BEAU = Beaufort Sea State; PSD = Perpendicular Distance (in metres); N/A = Not Applicable; DEC LAT = Latitude (WGS84 in Decimal), DEC LON = Longitude (WGS84 in Decimal); BOAT ASSOC. = Fishing Boat Association


Sighting data of finless porpoise (FP) are presented for reference only. No relevant figure or text will be mentioned in the quarterly EM&A report. All FP sightings are excluded in calculation.


CWD Small Vessel Line-transect Survey


Photo Identification



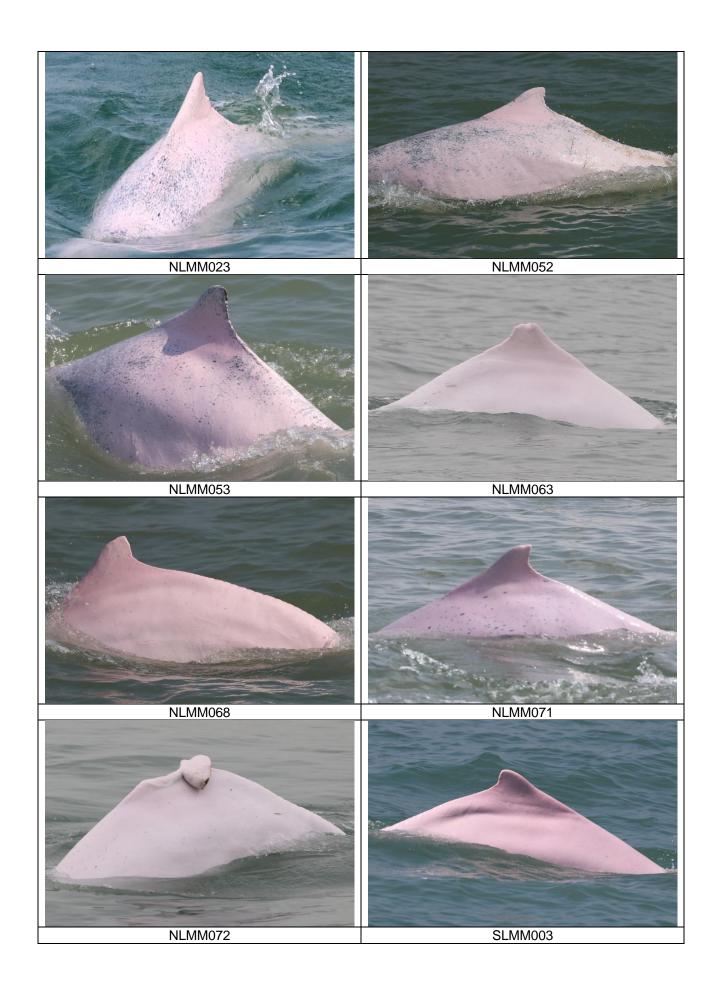

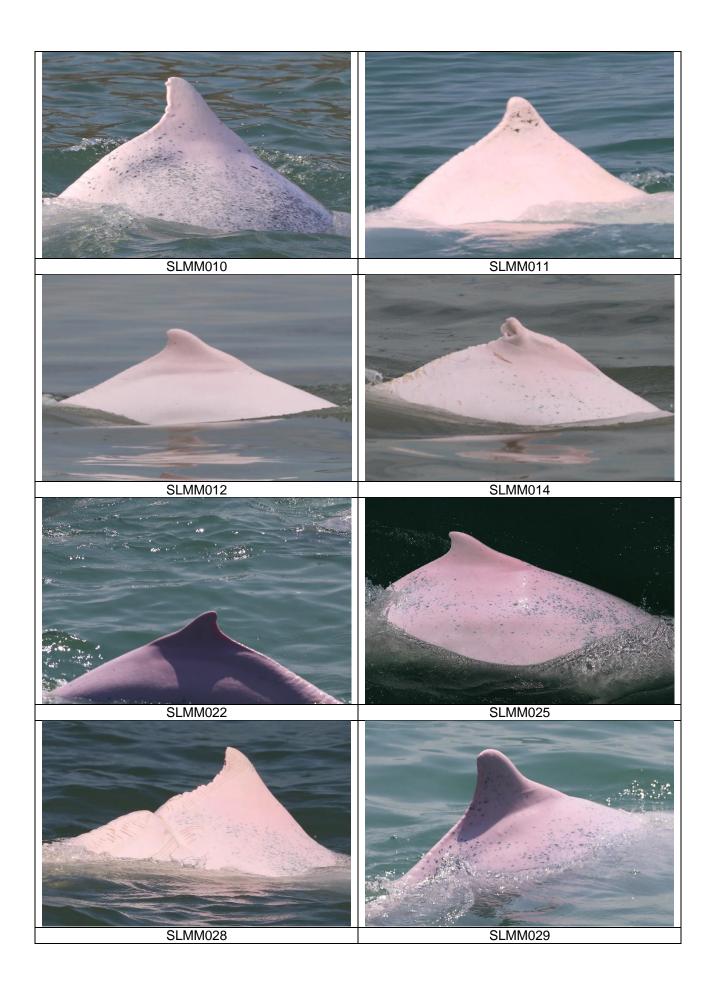

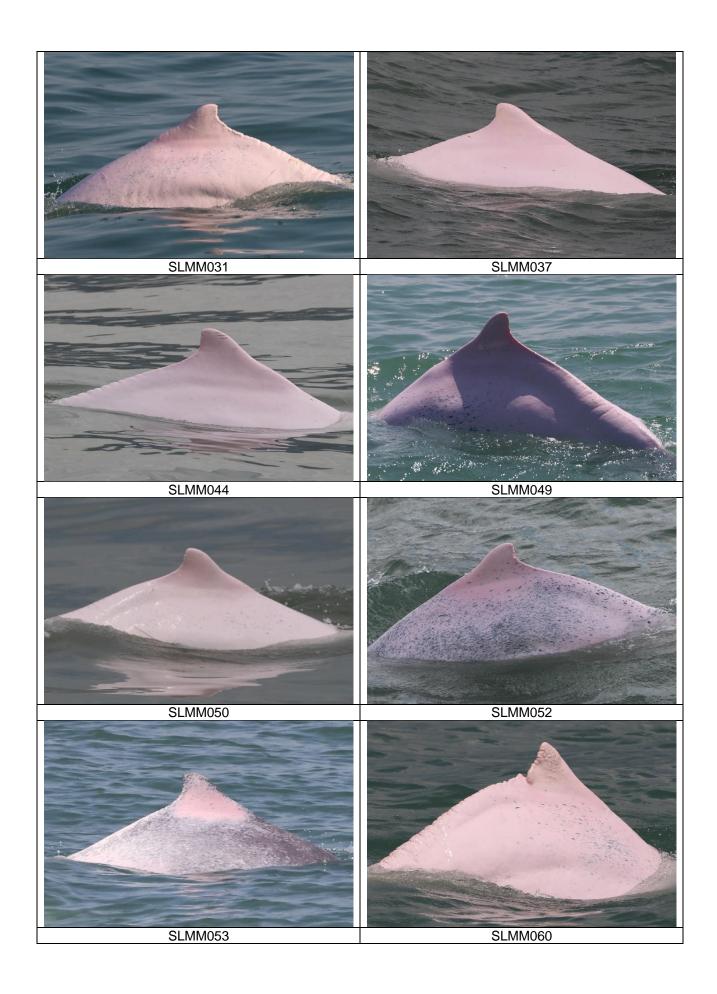

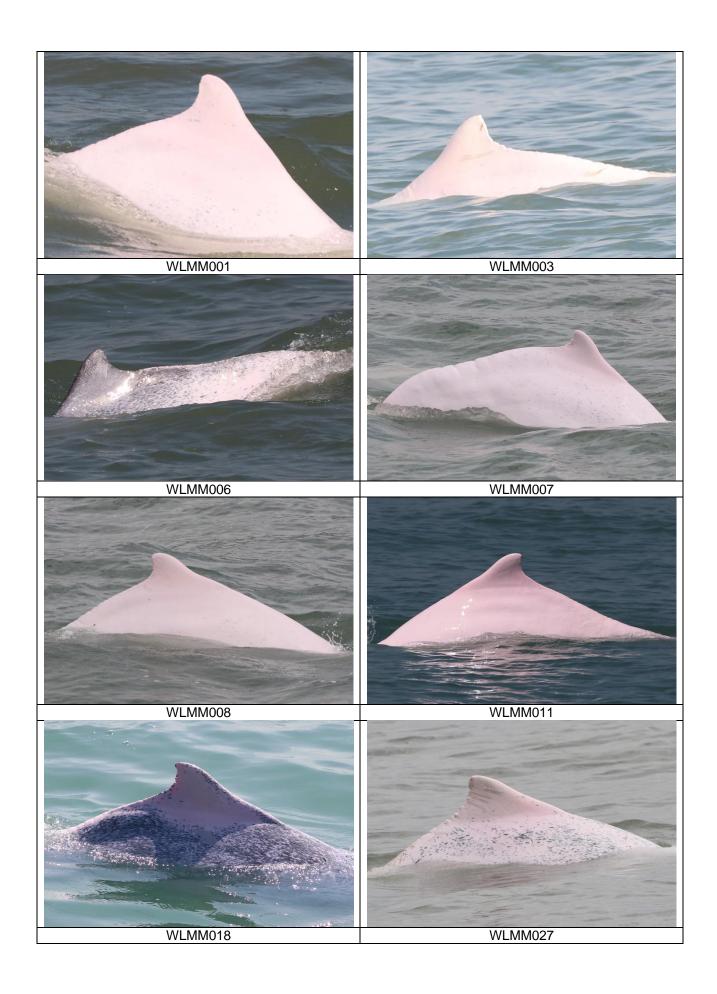

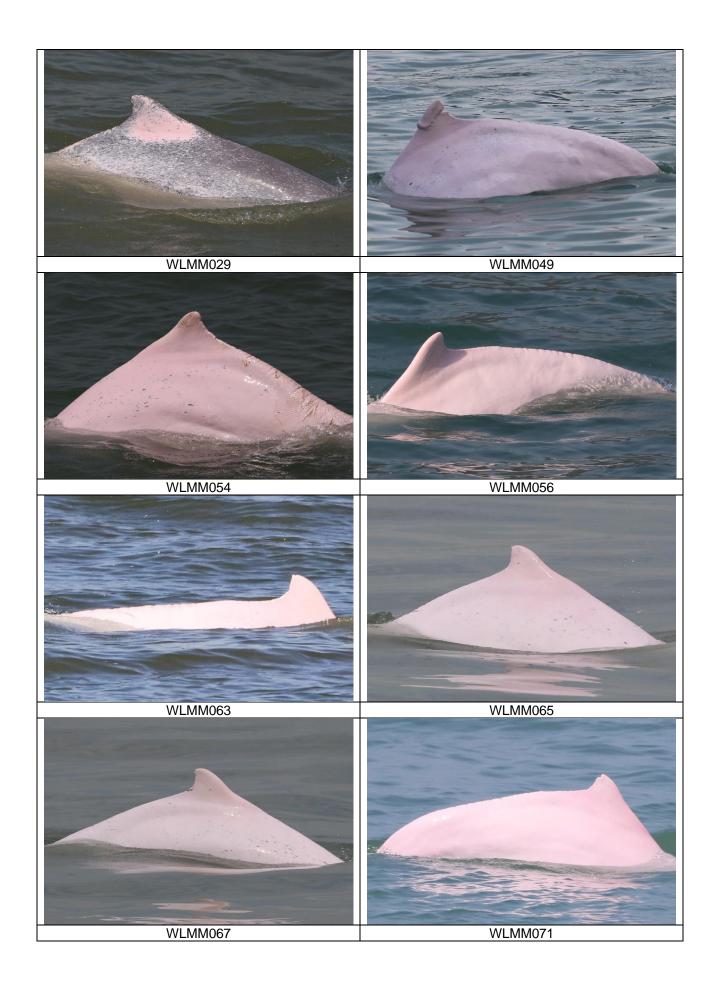
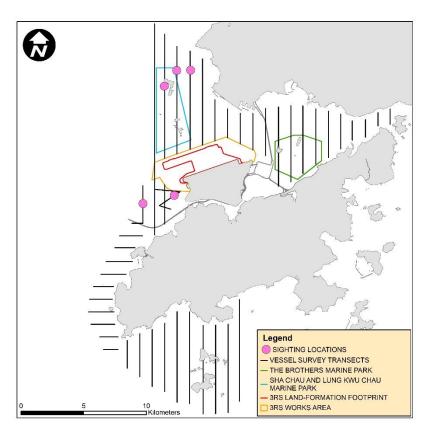


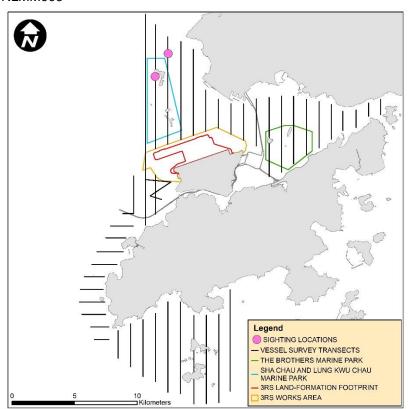


Photo Identification – Re-sighting Locations


NLMM004




NLMM006



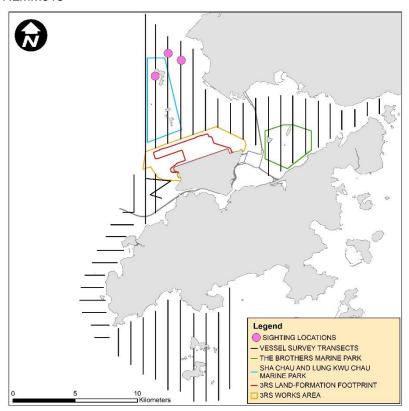
NLMM013




NLMM016

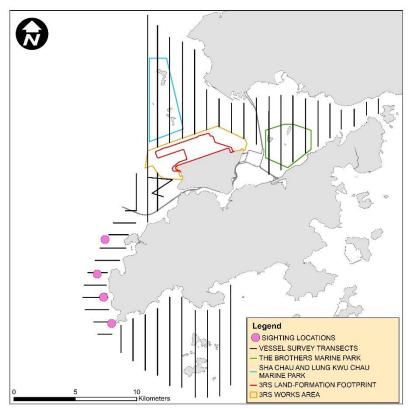



NLMM018

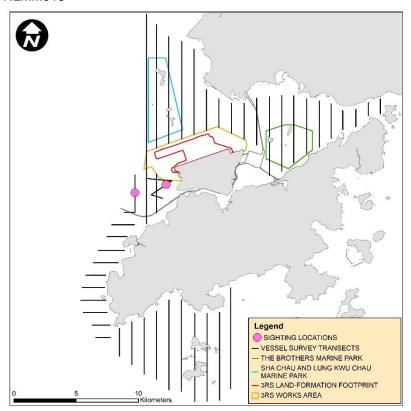



NLMM019

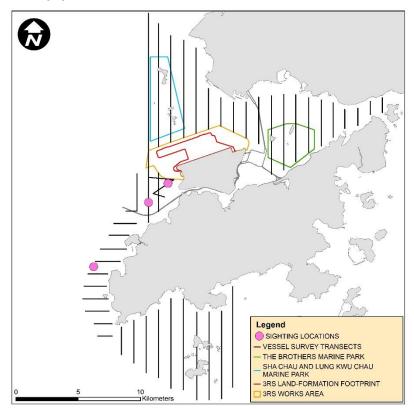


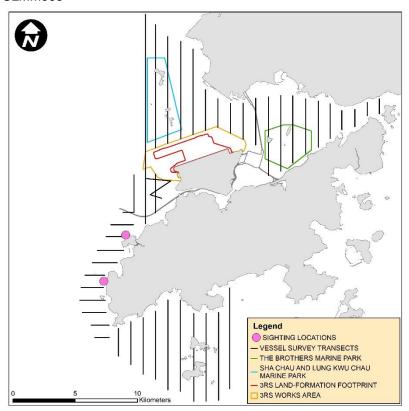


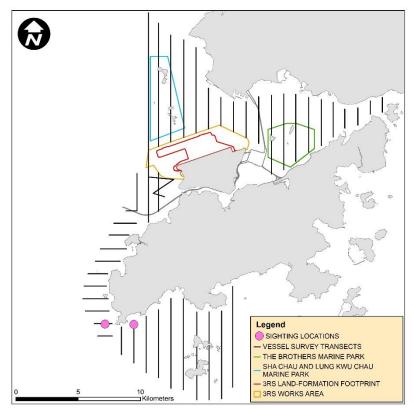


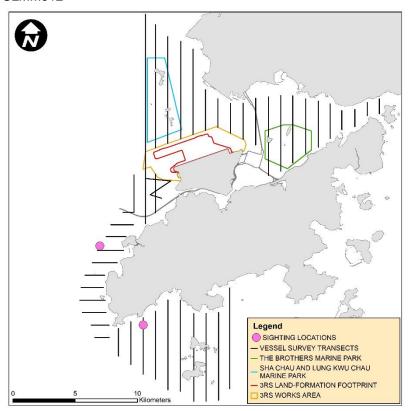


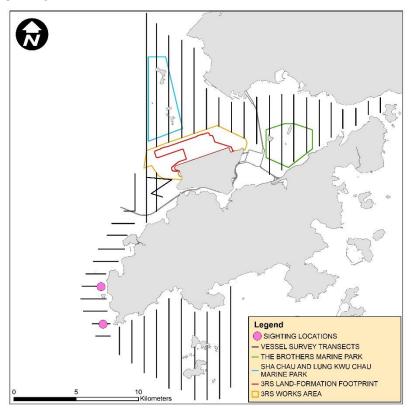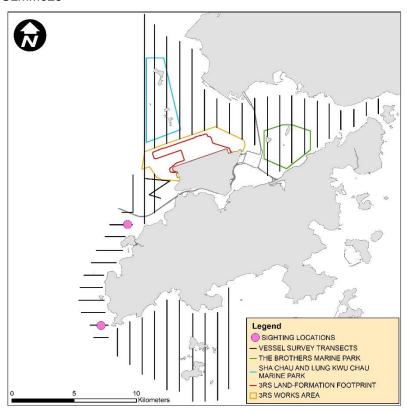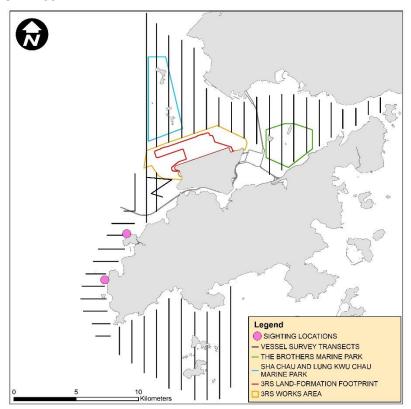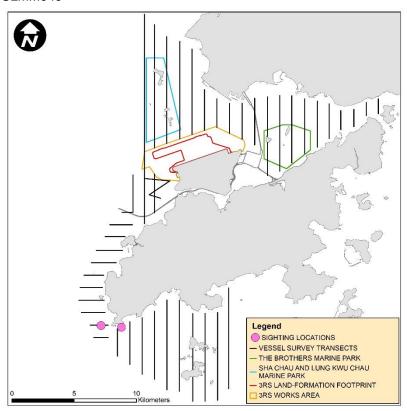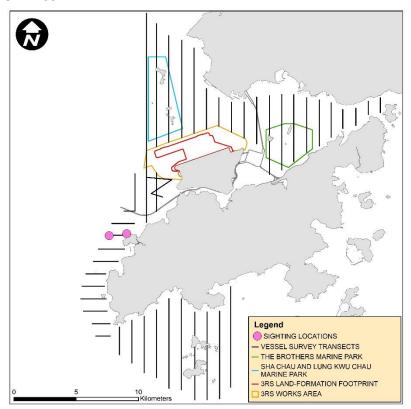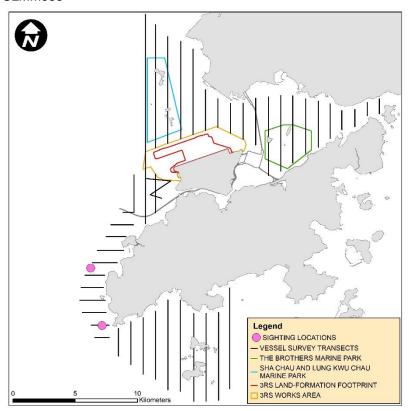


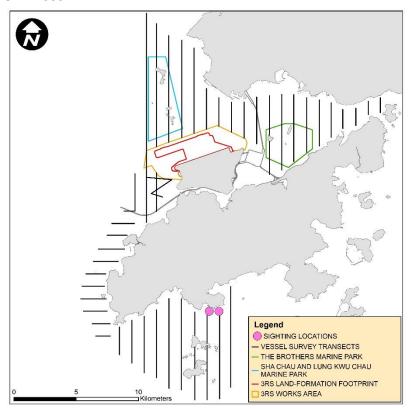















WLMM007

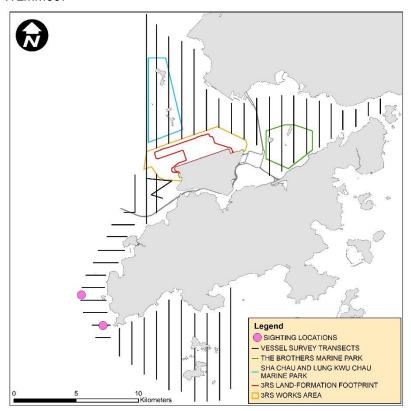


WLMM008

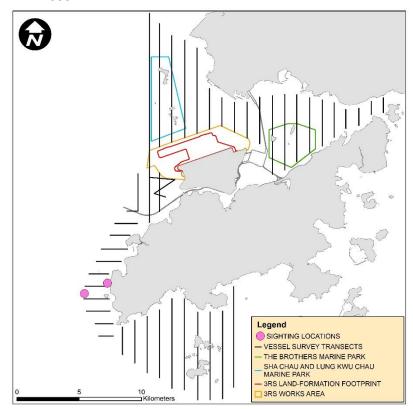

WLMM029

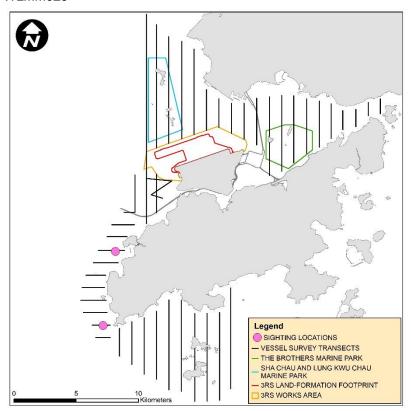

WLMM054

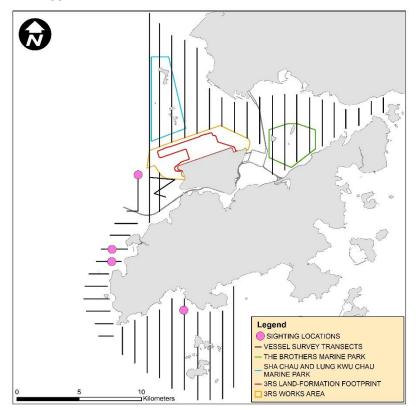

CWD Land-based Theodolite Tracking

CWD Groups by Survey Date

Date	Station	Start	End	Duration	Beaufort	Visibility	No. of Focal Follow	Dolphin Group Size
11/Oct/19	Lung Kwu Chau	9:21	15:21	6:00	2-3	3	1	1
21/Oct/19	Lung Kwu Chau	8:45	14:45	6:00	2	2-3	4	1-2
22/Oct/19	Sha Chau	8:40	14:40	6:00	2	2	0	-
12/Nov/19	Lung Kwu Chau	10:08	16:08	6:00	2-3	2-3	2	2-5
21/Nov/19	Lung Kwu Chau	8:56	14:56	6:00	3	3	0	0
28/Nov/19	Sha Chau	8:55	14:55	6:00	2-3	2	0	-
11/Dec/19	Lung Kwu Chau	9:10	15:10	6:00	2-3	3	1	1
18/Dec/19	Lung Kwu Chau	9:00	15:00	6:00	1-2	2	2	1-5
30/Dec/19	Sha Chau	9:02	15:02	6:00	2-3	4	0	0

Visibility: 1=Excellent, 2=Good, 3=Fair, 4=Poor